

## RESOLUCION 737 - SUBTEL

Fecha de publicación: 12/3/2026

---

### Información Comercial

#### Nombre comercial del equipo

Código	Descripción
929001180642	Philips HUE Bridge EU
929001180601	Philips HUE Bridge EU

**Fabricante:** Signify (China) Investment Co., Ltd.

**Importador o representante en Chile:** SIGNIFY CHILENA S.A.

**Domicilio:** El Bosque Norte 0211, Las Condes - Santiago

**Correo electrónico de contacto:** tomas.aragona@signify.com

**Sitio Web:** philips-hue.com/es-cl

---

### Características técnicas

Tipo de equipo	Controlador inteligente
Marca	Hue
Modelo	Hue Bridge EU ó 3241312018A
Módulo	ATMEL ATSAMR21
Tecnología o modulación	QPSK
Frecuencias	ZigBee: 2405 – 2475MHz
Ganancia de antena (dBi)	1.7 dBi
P.I.R.E. (EIRP)	ZigBee: 52,84 mW (17,23 dBm)

---

### Declaración de conformidad

*“El equipo previamente individualizado cumple con las disposiciones establecidas en la Norma Técnica de Equipos de alcance reducido, aprobada por la resolución exenta N° 1.985, de 2017, de la Subsecretaría de Telecomunicaciones.”*

---

Firma del Importador/Responsable:

Nombre de quien firma: Tomás Aragona

Cargo: Representante Legal



- ANT.: 1. Ingreso SUBTEL N° 31.972 de 06.03.2024.  
2. Resolución Exenta N° 1985 de 2017, y sus modificaciones, de la Subsecretaría de Telecomunicaciones.  
3. Resolución Exenta N° 3.103 de 2012, de la Subsecretaría de Telecomunicaciones.  
4. Resolución Exenta N°470 de 13/02/2013, que faculta a los Jefes de División y Departamento para firmar "Por orden del Subsecretario de Telecomunicaciones" y delega las facultades que indica.

MAT.: Certifica equipo de alcance reducido.

DE: SUBSECRETARÍA DE TELECOMUNICACIONES

A: MBSERVICES.

1. De acuerdo a la información proporcionada por documento de ANT. 1), esta Subsecretaría de Estado extiende el presente certificado para operar dentro del país, condicionado al estricto cumplimiento de lo señalado en letras j.1) y e) del artículo 1° de la norma señalada en ANT. 2):

- Tipo de Equipo : Hue Bridge
- Marca : HUE.
- Modelo : 3241312018A
- Fabricante : Signify (China) Investment Co., Ltd.
- Frecuencias de operación : ZigBee: 2405 – 2475MHz
- Potencia máxima radiada : ZigBee: 52,84 mW (17,23 dBm).
- Restricciones de uso : Estos equipos deben emplear técnicas que permitan la compartición de frecuencias.

2. El incumplimiento de lo dispuesto por el presente certificado, será sancionado de acuerdo a las disposiciones legales vigentes. Estos equipos no deberán provocar interferencias a servicios de concesionarias de telecomunicaciones y no estarán protegidos respecto de interferencias que eventualmente puedan recibir.

Saluda atentamente a Ud.,  
Por orden del Subsecretario de Telecomunicaciones

DISTRIBUCIÓN:

- MBservices, [laboratorio@mbservices.cl](mailto:laboratorio@mbservices.cl)
- Oficina de Partes.

Alex Gallardo Duarhht  
Jefe División Fiscalización (S)  
19 de mar. de 2024 / 2:33:18 PM



# FCC Test Report

**Equipment** : Philips HUE Bridge 2.1  
**Brand Name** : PHILIPS  
**Model No.** : 3241312018A  
**FCC ID** : 2AGBW3241312018AX  
**Standard** : 47 CFR FCC Part 15.247  
**Frequency** : 2400 MHz – 2483.5 MHz  
**FCC Classification** : DTS  
**Function** :  Point-to-multipoint;  Point-to-point  
**Applicant / Manufacturer** : Philips Lighting(China) Investment Co., Ltd.  
Building 9, Lane 888, Tianlin Road, Minhang District,  
Shanghai 200233 China

The product sample received on Jun. 06, 2016 and completely tested on Jun. 22, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Kevin Liang / Assistant Manager





# Table of Contents

- 1 GENERAL DESCRIPTION .....5**
- 1.1 Information.....5
- 1.2 Testing Applied Standards .....7
- 1.3 Testing Location Information .....7
- 1.4 Measurement Uncertainty .....8
- 2 TEST CONFIGURATION OF EUT.....9**
- 2.1 Test Channel Mode .....9
- 2.2 The Worst Case Measurement Configuration .....10
- 2.3 Accessories and Support Equipment .....11
- 2.4 Test Setup Diagram .....12
- 3 TRANSMITTER TEST RESULT .....13**
- 3.1 AC Power-line Conducted Emissions .....13
- 3.2 DTS Bandwidth.....15
- 3.3 Fundamental Emission Output Power.....16
- 3.4 Power Spectral Density .....19
- 3.5 Transmitter Radiated Bandedge Emissions .....21
- 3.6 Transmitter Radiated Unwanted Emissions .....24
- 4 TEST EQUIPMENT AND CALIBRATION DATA .....28**

**Appendix I. Test Result of AC Power-line Conducted Emissions**

**Appendix A. Test Result of Emission Bandwidth**

**Appendix B. Test Result of Maximum Conducted Output Power**

**Appendix C. Test Result of Power Spectral Density**

**Appendix D. Test Result of Transmitter Radiated Bandedge Emissions**

**Appendix E. Transmitter Radiated Unwanted Emissions**

**Appendix F. Test Photos**

**Appendix G. Photographs of EUT**



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.4554350MHz 26.03(Margin 20.75dB) - AV 30.02(Margin 26.76dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	DTS Bandwidth	Refer as Appendix A	≥500kHz	Complied
3.3	15.247(b)	Fundamental Emission Output Power	Refer as Appendix B	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	Refer as Appendix C	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Test Result of Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2399.96 MHz: 39.25 dB Restricted Bands [dBuV/m at 3m]: 2483.94MHz 50.69 (Margin 3.31 dB) - AV 61.08 (Margin 12.92 dB) - PK	Non-Restricted Bands:> 20 dBc Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 7320.00 MHz 51.68 (Margin 2.32dB) - AV 61.76 (Margin 12.24dB) - PK	Non-Restricted Bands:> 20 dBc Restricted Bands: FCC 15.209	Complied



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Band	Mode	BWch (MHz)	Nss-Min	Nant
2.4G	Zigbee	5	1	1

Note:

- 2.4G is the 2.4GHz Band (2.4-2.4835GHz).
- Zigbee using QPSK modulation for DTS digital modulation.
- BWch is the nominal channel bandwidth.
- Nss-Min is the minimum number of spatial streams.
- Nant is the number of outputs.

### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	printed PIFA	1.7



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Mode Test Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100.00% - Zigbee	0.00

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> External AC adapter	<input type="checkbox"/> From Host System	<input type="checkbox"/> Battery

## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 558074 D01 v03r05
- ◆ FCC 15.247

## 1.3 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD	: No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan, R.O.C.	
		TEL	: 886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Daniel	21.5°C / 55%	22/06/2016
RF Conducted	TH01-HY	Howard	23.5°C / 65%	14/06/2016
Radiated	03CH03-HY	Jeff	19.6°C / 61%	14/06/2016

Test site registered number [ 553509 ] with FCC.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 6dB bandwidth		±0.6 %
RF output power, conducted		±0.1 dB
Power density, conducted		±0.6 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±5 %
DC and low frequency voltages		±0.9%
Time		±1.4 %
Duty Cycle		±0.6 %



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Test Software Version	PUTTY
-----------------------	-------

Band	Mode	BWch (MHz)	Nss-Min	Nant	Ch. (MHz)	Range	Power Setting
2.4G	Zigbee	5	1	1	2405	L	6
2.4G	Zigbee	5	1	1	2440	M	8
2.4G	Zigbee	5	1	1	2475	H	13

#### Abbreviation Explanation




Band	Mode	BWch (MHz)	Nss-Min	Nant	Ch. (MHz)	Range	Test Cond.	Abbreviation
2.4G	Zigbee,	5	1	1	2405	L	TN,VN	2.4G;Zigbee;5;1;1;2405;TN,VN

Note:  
♦ Test range channel consist of L (Low Ch.), M (Middle Ch.), H (High Ch.), S (Single Ch).

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	Transmit Mode

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	DTS Bandwidth, Fundamental Emission Output Power, Power Spectral Density, Emissions in Non-restricted Frequency Bands
<b>Test Condition</b>	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Emissions in Restricted Frequency Bands		
<b>Test Condition</b>	Radiated measurement		
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.		
<b>Operating Mode &lt; 1GHz</b>	<input checked="" type="checkbox"/> 1. Transmit Mode		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			
<b>Worst Planes of EUT</b>			V





### 2.3 Accessories and Support Equipment

Accessories				
AC Adapter	Brand Name	Ten Pao	Model Name	S005BMM0500100
	Power Rating	I/P:100-240Vac, 300 mA, O/P: 5 Vdc,1000 mA		
	Power Cord	1.5 meter, non-shielded cable, w/o ferrite core		
RJ45 Cable	Category	CAT5	In/Out door	-
	Power Cord	1 meter, non-shielded cable		

Support Equipment - AC Conduction and Radiated emission				
No.	Equipment	Brand Name	Model Name	FCC ID.
1	-	-	-	-

Support Equipment - Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID.
1	Notebook	DELL	E5540	DoC
2	Adapter for NB	DELL	HA65NM130	DoC

## 2.4 Test Setup Diagram

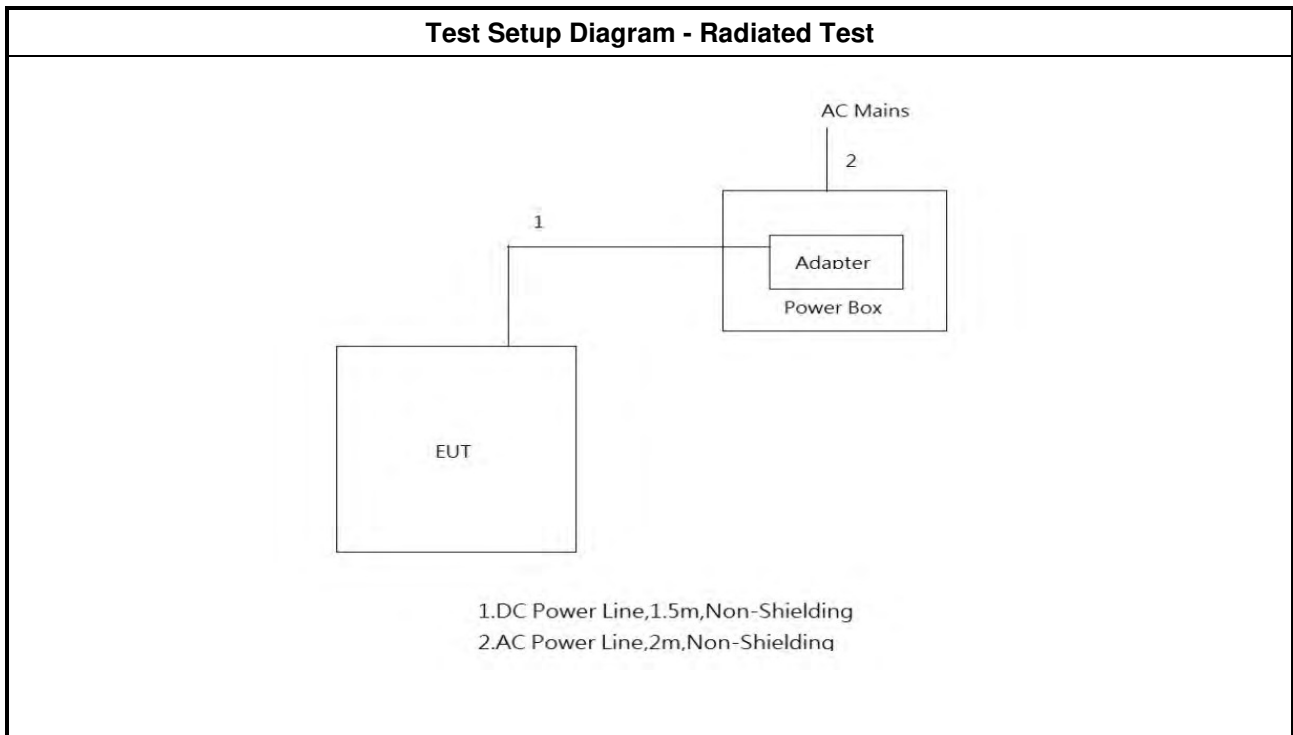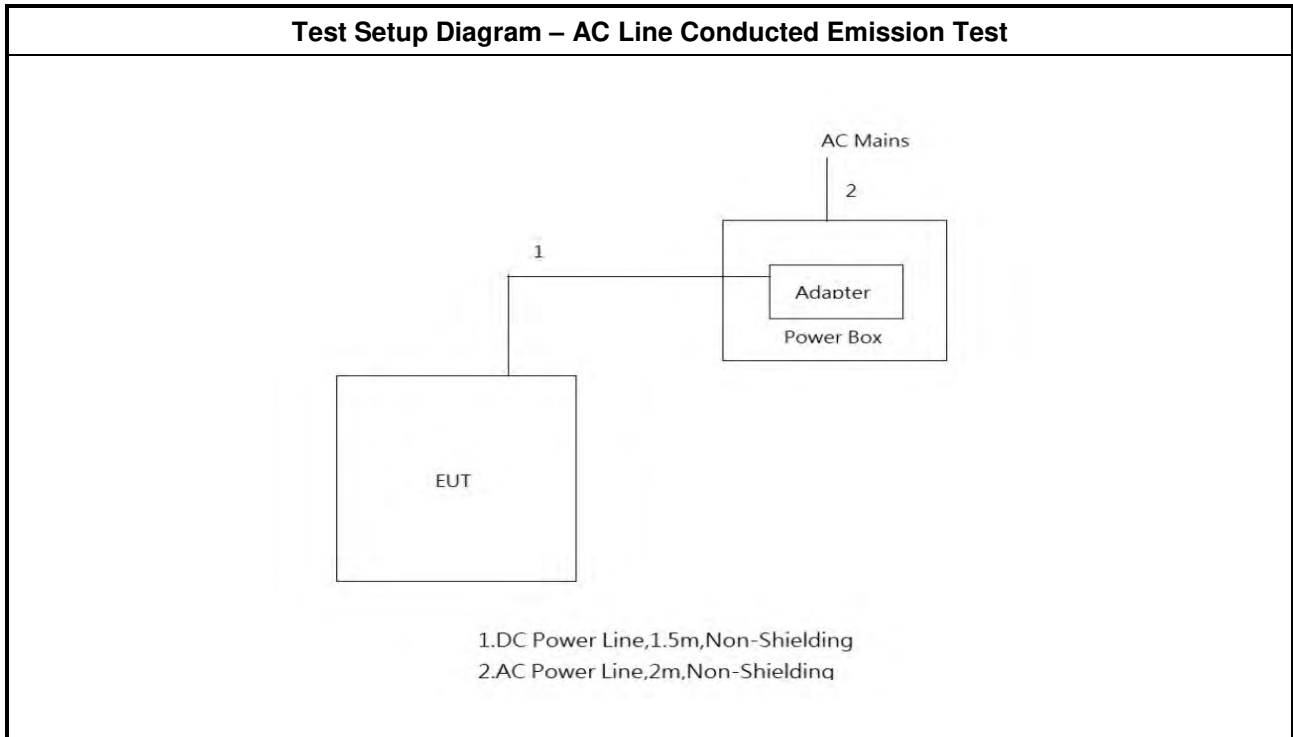

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.</li> </ul>

##### 3.1.4 Test Setup

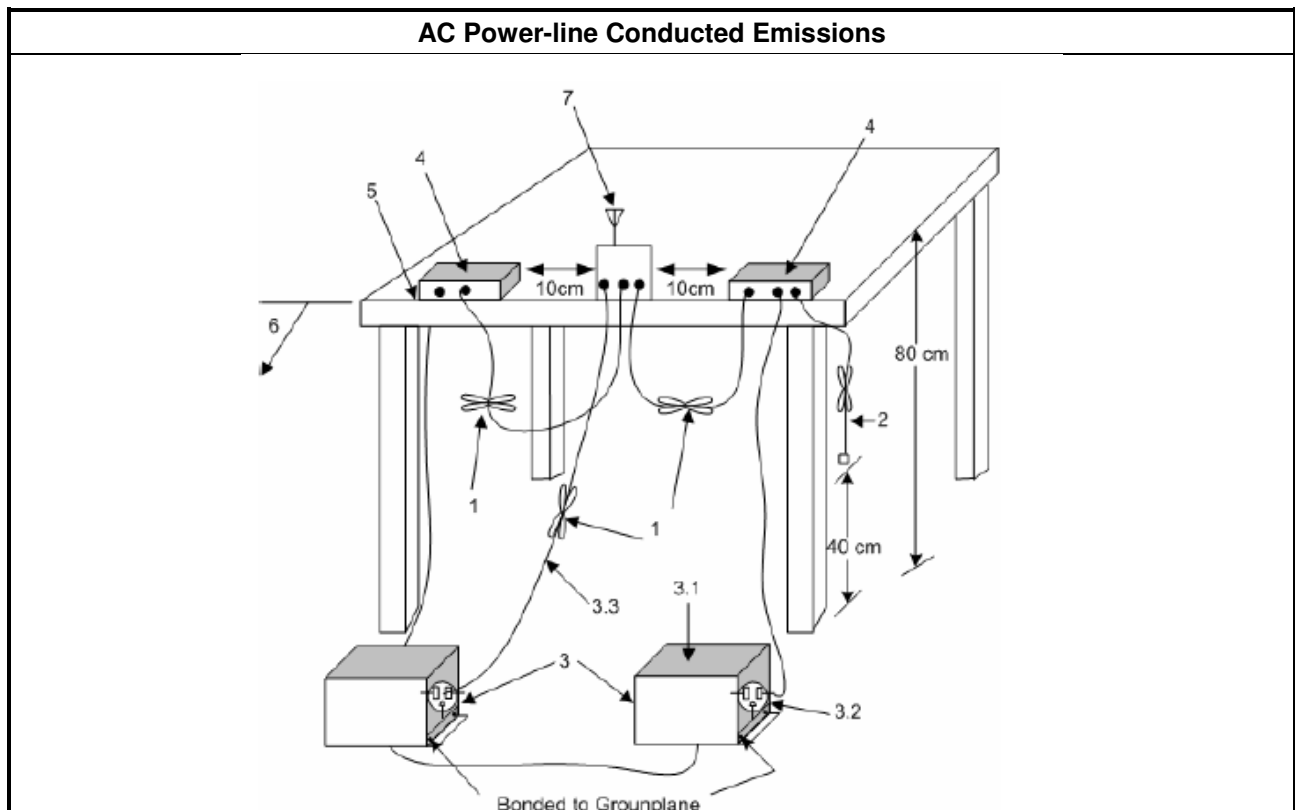



### **3.1.5 Test Result of AC Power-line Conducted Emissions**

Refer as Appendix I

### 3.2 DTS Bandwidth

#### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<ul style="list-style-type: none"> <li>▪ 6 dB bandwidth <math>\geq</math> 500 kHz.</li> </ul>


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:</li> </ul>	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

#### 3.2.4 Test Setup

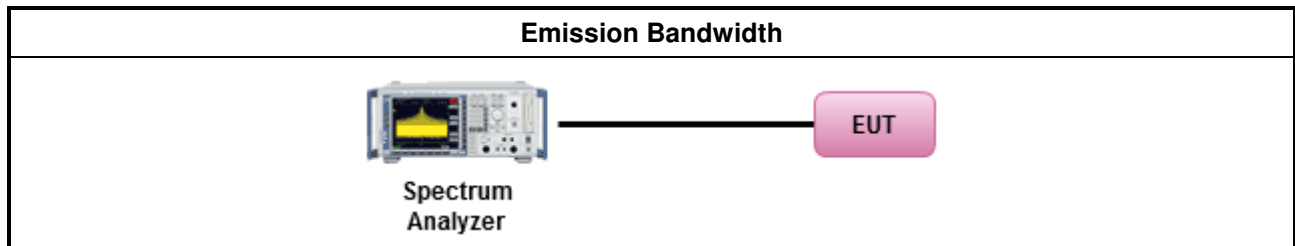

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix A

### 3.3 Fundamental Emission Output Power

#### 3.3.1 Fundamental Emission Output Power Limit

Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<ul style="list-style-type: none"> <li>▪ 2400-2483.5 MHz Band:</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ If <math>G_{TX} \leq 6</math> dBi, then <math>P_{Out} \leq 30</math> dBm (1 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS):</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)/3 + 8</math> dBm</li> </ul>
<b>e.i.r.p. Power Limit:</b>	
<ul style="list-style-type: none"> <li>▪ 2400-2483.5 MHz Band</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): <math>P_{eirp} \leq 36</math> dBm (4 W)</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Smart antenna system (SAS)</li> </ul>
	<ul style="list-style-type: none"> <li>- Single beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Overlap beam: <math>P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})</math> dBm</li> </ul>
	<ul style="list-style-type: none"> <li>- Aggregate power on all beams: <math>P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])</math> dBm</li> </ul>
<p><math>P_{Out}</math> = maximum peak conducted output power or maximum conducted output power in dBm,  <math>G_{TX}</math> = the maximum transmitting antenna directional gain in dBi.  <math>P_{eirp}</math> = e.i.r.p. Power in dBm.</p>	


### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>▪ Maximum Peak Conducted Output Power</li> </ul>	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW ≥ DTS BW)
<ul style="list-style-type: none"> <li>▪ Maximum Conducted Output Power</li> </ul>	
[duty cycle ≥ 98% or external video / power trigger]	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger	
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math display="block">P_{total} = P_1 + P_2 + \dots + P_n</math>                     (calculated in linear unit [mW] and transfer to log unit [dBm])  <math display="block">EIRP_{total} = P_{total} + DG</math> </li> </ul>	

### 3.3.4 Test Setup

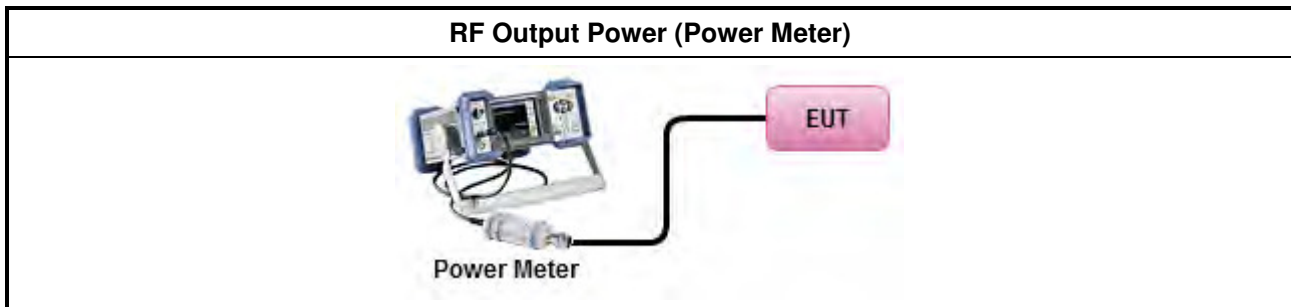

### 3.3.5 Test Result of Maximum Peak Conducted Output Power

Refer as Appendix B

### 3.3.6 Test Result of Maximum Average Conducted Output Power

Refer as Appendix B

### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> <li>▪ Power Spectral Density (PSD) <math>\leq</math> 8 dBm/3kHz</li> </ul>


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> <li>▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).</li> </ul>
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle $\geq$ 98% or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed) duty cycle $<$ 98% and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<ul style="list-style-type: none"> <li>▪ For conducted measurement.</li> </ul>
<ul style="list-style-type: none"> <li>▪ If The EUT supports multiple transmit chains using options given below:</li> </ul>
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N <sub>TX</sub> output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

### 3.4.4 Test Setup

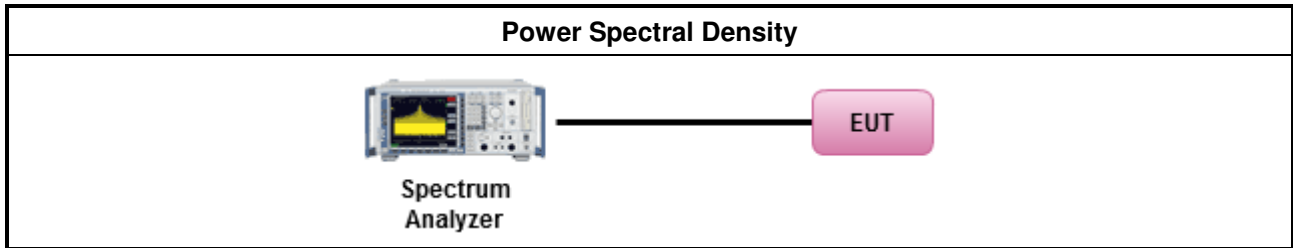


### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix C

### 3.5 Transmitter Radiated Bandedge Emissions

#### 3.5.1 Transmitter Radiated Bandedge Emissions Limit

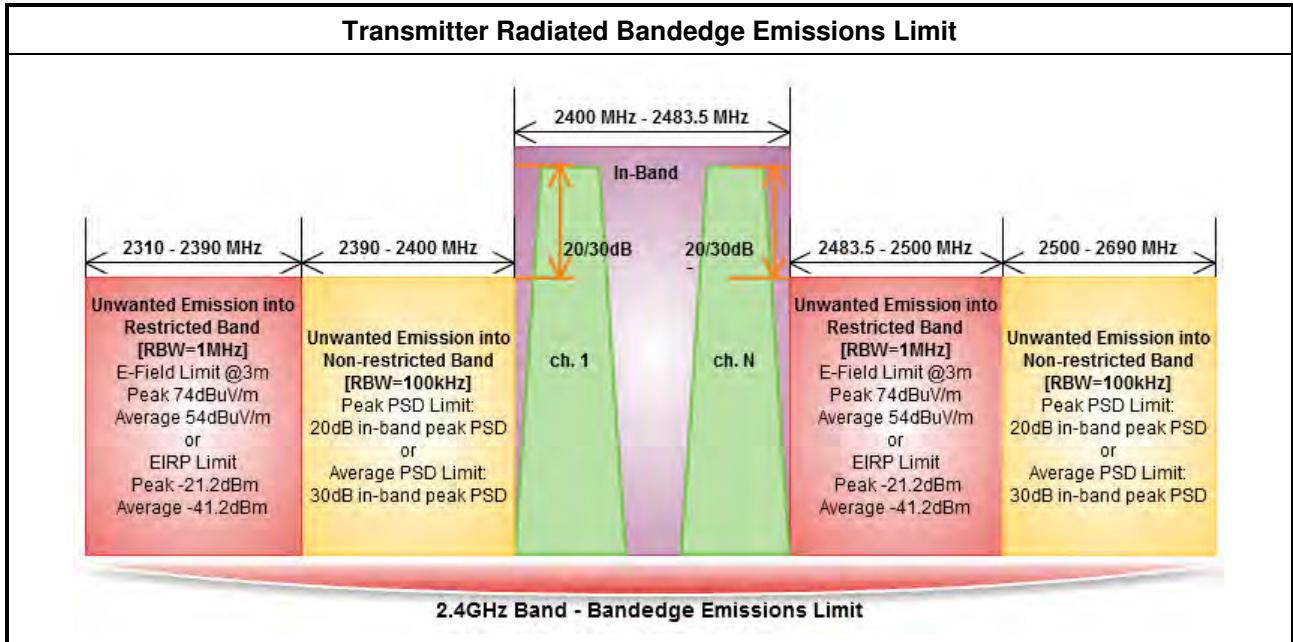


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq$ 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq$ 1/T).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7 and ANSI C63.10, clause 6.6. Test distance is 3m.

### 3.5.4 Test Setup

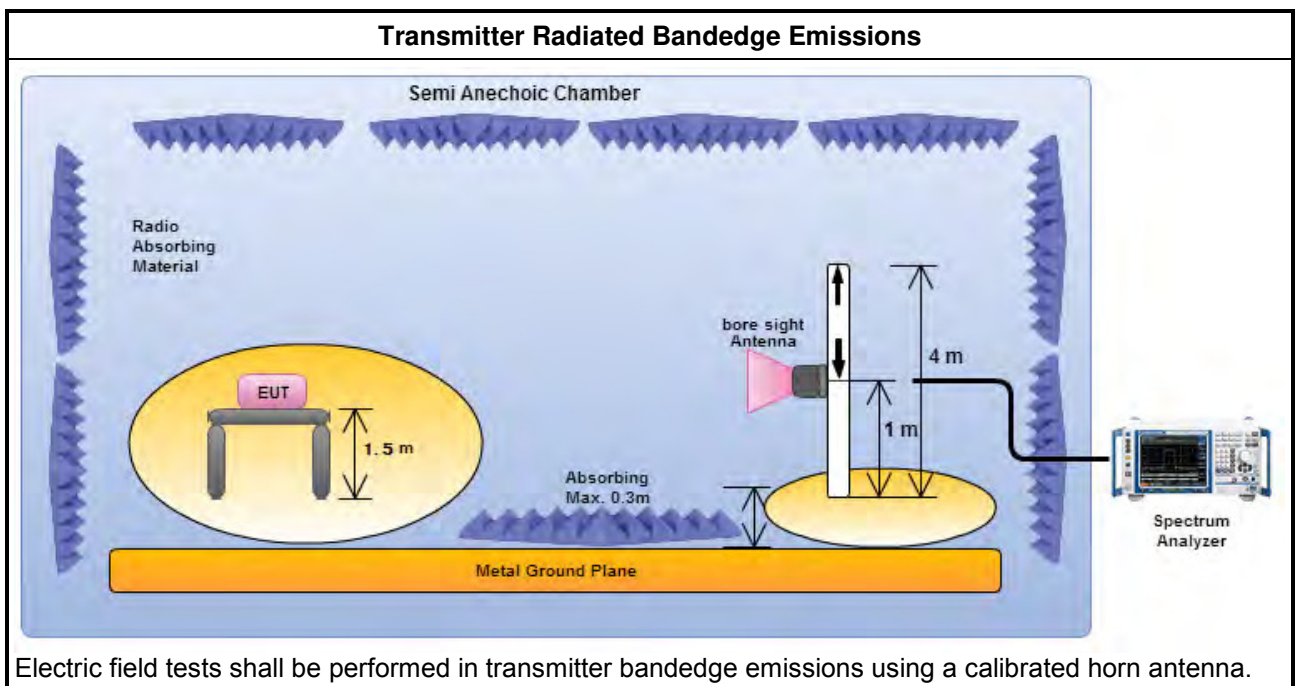



### **3.5.5 Test Result of Emissions in Non-restricted Frequency Bands**

Refer as Appendix D

### 3.6 Transmitter Radiated Unwanted Emissions

#### 3.6.1 Transmitter in Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.



#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq$ 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq$ 1/T).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 30 dB below the permissible value has no need to be reported.

### 3.6.4 Test Setup

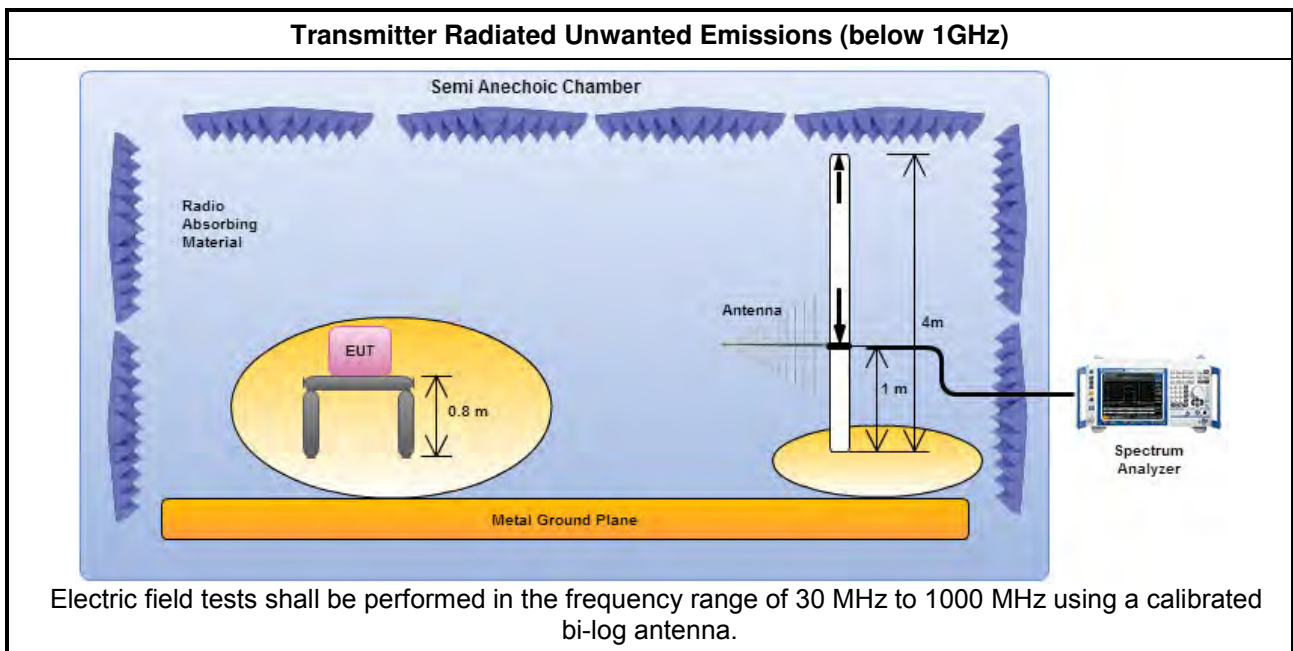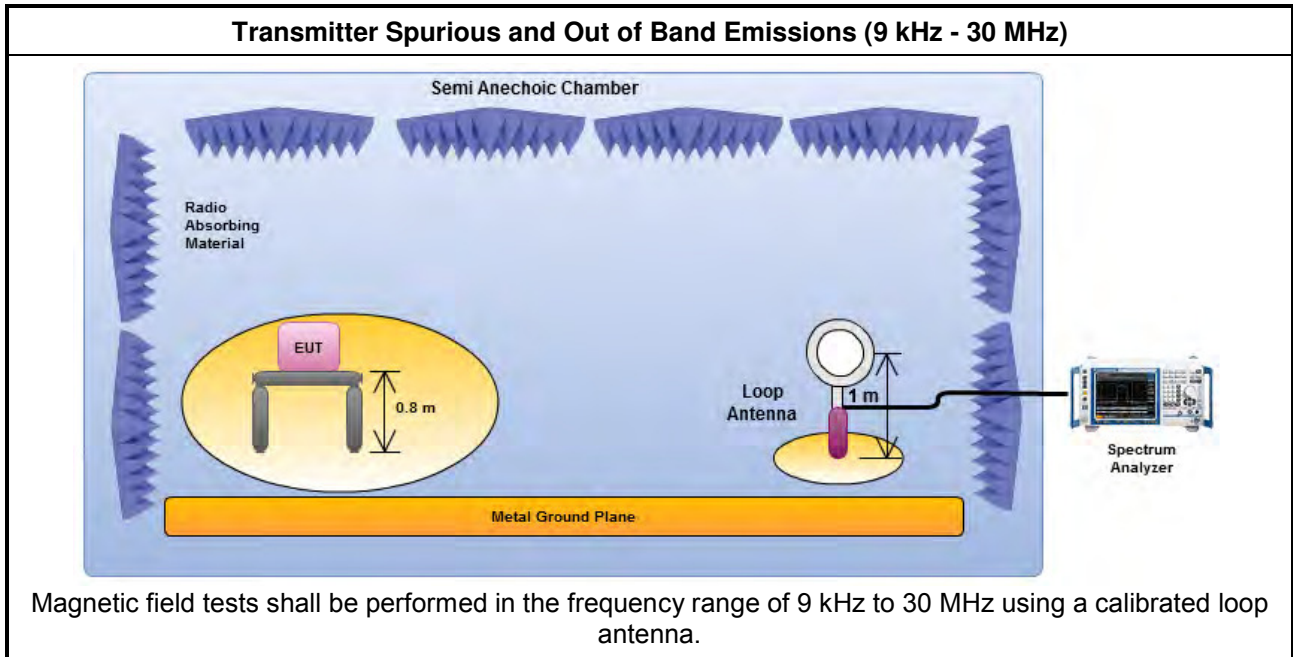

**Transmitter Radiated Unwanted Emissions (above 1GHz)**

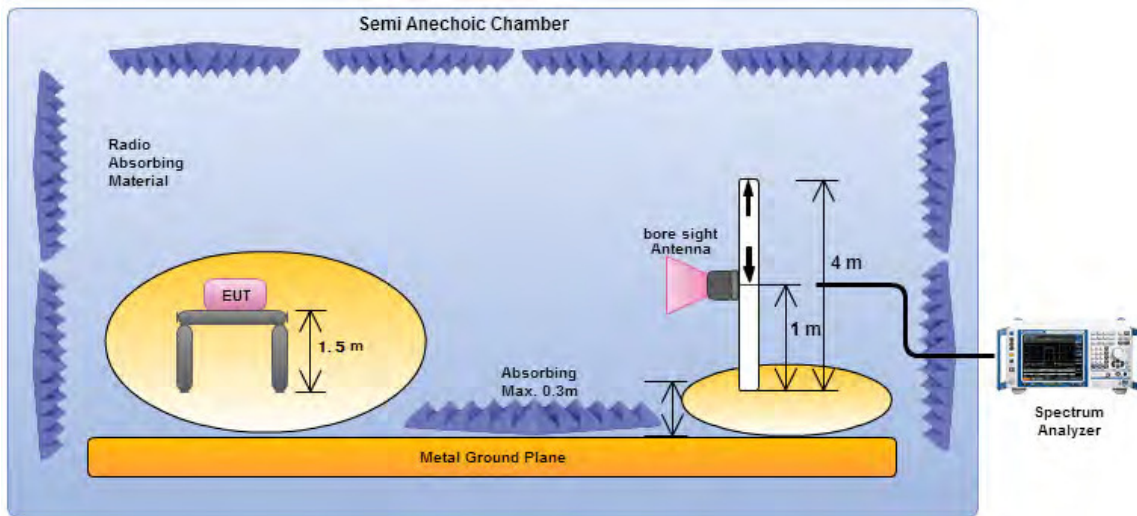

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

**3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)**

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

**3.6.6 Transmitter Radiated Unwanted Emissions**

Refer as Appendix E



## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
EMC Receiver	KEYSIGHT	N9038A	MY54130031	20Hz ~ 8.4GHz	Apr. 14, 2016	Apr. 13, 2017
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 26, 2016	Jan. 25, 2017
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 30, 2015	Oct. 29, 2016
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	NCR	NCR

### Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Fed. 16, 2016	Fed. 15, 2017
Power Sensor	Anritsu	MA2411B	917017	300MHz ~ 40GHz	Fed. 04, 2016	Fed. 03, 2017
Power Meter	Anritsu	ML2495A	949003	300MHz ~ 40GHz	Fed. 02, 2016	Fed. 03, 2017
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	Jul. 27, 2016
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	-20 ~ 100°C	Jun. 12, 2015	Jun. 11, 2016
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jul. 22, 2015	Jul. 21, 2016

### Instrument for Radiated Test


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	KEYSIGHT	N9010A	MY54200882	10Hz ~ 44GHz	Jul. 14, 2015	Jul. 13, 2016
Amplifier	EMC	EMC9135	980209	9kHz ~ 1.0GHz	Dec. 25, 2015	Dec. 24, 2016
Amplifier	EMC	EMC051845	980240	1GHz ~ 18GHz	Mar. 09, 2016	Mar. 08, 2017
Bilog Antenna	TDK	HLP-3003C	130776	25MHz ~ 1GHz	Oct.15, 2015	Oct.14, 2016
Horn Antenna	AARONIA AG	POWERLOG 70180	05193	1GHz ~ 18GHz	Dec. 30, 2015	Dec. 29, 2016



# AC Power-line Conducted Emissions

Appendix I

AC Power-line Conducted Emissions Result																																																																																																																																										
Operating Mode	1	Power Phase	Neutral																																																																																																																																							
Operating Function	AC Power & Radio link (Zigbee)																																																																																																																																									
<div style="text-align: right;">Date: 2016-06-22</div> <p>The graph displays the AC power-line conducted emissions. The y-axis represents the level in dBuV, ranging from 0 to 80. The x-axis represents the frequency in MHz, ranging from 0.15 to 30. Two red lines indicate the NCC/IC/FCC-B and NCC/IC/FCC-B AV limits. A blue line shows the measured emission levels, with several peaks labeled 1 through 12. The measured levels are generally below the limits, with some peaks near the 56 dBuV limit.</p>																																																																																																																																										
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>LISN</th> <th>Cable</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th></th> <th></th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.1544950</td> <td>34.41</td> <td>-31.34</td> <td>65.75</td> <td>34.09</td> <td>0.10</td> <td>0.22</td> <td>QP</td> </tr> <tr> <td>2</td> <td>0.1544950</td> <td>16.88</td> <td>-38.87</td> <td>55.75</td> <td>16.56</td> <td>0.10</td> <td>0.22</td> <td>Average</td> </tr> <tr> <td>3</td> <td>0.1803370</td> <td>14.02</td> <td>-40.45</td> <td>54.47</td> <td>13.64</td> <td>0.11</td> <td>0.27</td> <td>Average</td> </tr> <tr> <td>4</td> <td>0.1803370</td> <td>34.14</td> <td>-30.33</td> <td>64.47</td> <td>33.76</td> <td>0.11</td> <td>0.27</td> <td>QP</td> </tr> <tr> <td>5</td> <td>0.4695010</td> <td>25.16</td> <td>-31.36</td> <td>56.52</td> <td>24.94</td> <td>0.12</td> <td>0.10</td> <td>QP</td> </tr> <tr> <td>6</td> <td>0.4695010</td> <td>20.84</td> <td>-25.68</td> <td>46.52</td> <td>20.62</td> <td>0.12</td> <td>0.10</td> <td>Average</td> </tr> <tr> <td>7</td> <td>0.7673480</td> <td>25.49</td> <td>-30.51</td> <td>56.00</td> <td>25.26</td> <td>0.13</td> <td>0.10</td> <td>QP</td> </tr> <tr> <td>8</td> <td>0.7673480</td> <td>19.87</td> <td>-26.13</td> <td>46.00</td> <td>19.64</td> <td>0.13</td> <td>0.10</td> <td>Average</td> </tr> <tr> <td>9</td> <td>1.180</td> <td>16.04</td> <td>-29.96</td> <td>46.00</td> <td>15.76</td> <td>0.13</td> <td>0.15</td> <td>Average</td> </tr> <tr> <td>10</td> <td>1.180</td> <td>24.08</td> <td>-31.92</td> <td>56.00</td> <td>23.80</td> <td>0.13</td> <td>0.15</td> <td>QP</td> </tr> <tr> <td>11</td> <td>10.560</td> <td>22.39</td> <td>-37.61</td> <td>60.00</td> <td>21.90</td> <td>0.29</td> <td>0.20</td> <td>QP</td> </tr> <tr> <td>12</td> <td>10.560</td> <td>15.45</td> <td>-34.55</td> <td>50.00</td> <td>14.96</td> <td>0.29</td> <td>0.20</td> <td>Average</td> </tr> </tbody> </table>					Freq	Level	Over	Limit	Read	LISN	Cable			MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark				dB	dBuV	dBuV	dB	dB		1	0.1544950	34.41	-31.34	65.75	34.09	0.10	0.22	QP	2	0.1544950	16.88	-38.87	55.75	16.56	0.10	0.22	Average	3	0.1803370	14.02	-40.45	54.47	13.64	0.11	0.27	Average	4	0.1803370	34.14	-30.33	64.47	33.76	0.11	0.27	QP	5	0.4695010	25.16	-31.36	56.52	24.94	0.12	0.10	QP	6	0.4695010	20.84	-25.68	46.52	20.62	0.12	0.10	Average	7	0.7673480	25.49	-30.51	56.00	25.26	0.13	0.10	QP	8	0.7673480	19.87	-26.13	46.00	19.64	0.13	0.10	Average	9	1.180	16.04	-29.96	46.00	15.76	0.13	0.15	Average	10	1.180	24.08	-31.92	56.00	23.80	0.13	0.15	QP	11	10.560	22.39	-37.61	60.00	21.90	0.29	0.20	QP	12	10.560	15.45	-34.55	50.00	14.96	0.29	0.20	Average
	Freq	Level	Over	Limit	Read	LISN	Cable																																																																																																																																			
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark																																																																																																																																		
			dB	dBuV	dBuV	dB	dB																																																																																																																																			
1	0.1544950	34.41	-31.34	65.75	34.09	0.10	0.22	QP																																																																																																																																		
2	0.1544950	16.88	-38.87	55.75	16.56	0.10	0.22	Average																																																																																																																																		
3	0.1803370	14.02	-40.45	54.47	13.64	0.11	0.27	Average																																																																																																																																		
4	0.1803370	34.14	-30.33	64.47	33.76	0.11	0.27	QP																																																																																																																																		
5	0.4695010	25.16	-31.36	56.52	24.94	0.12	0.10	QP																																																																																																																																		
6	0.4695010	20.84	-25.68	46.52	20.62	0.12	0.10	Average																																																																																																																																		
7	0.7673480	25.49	-30.51	56.00	25.26	0.13	0.10	QP																																																																																																																																		
8	0.7673480	19.87	-26.13	46.00	19.64	0.13	0.10	Average																																																																																																																																		
9	1.180	16.04	-29.96	46.00	15.76	0.13	0.15	Average																																																																																																																																		
10	1.180	24.08	-31.92	56.00	23.80	0.13	0.15	QP																																																																																																																																		
11	10.560	22.39	-37.61	60.00	21.90	0.29	0.20	QP																																																																																																																																		
12	10.560	15.45	-34.55	50.00	14.96	0.29	0.20	Average																																																																																																																																		
<p>Note 1: "&gt;20dB" means emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																										

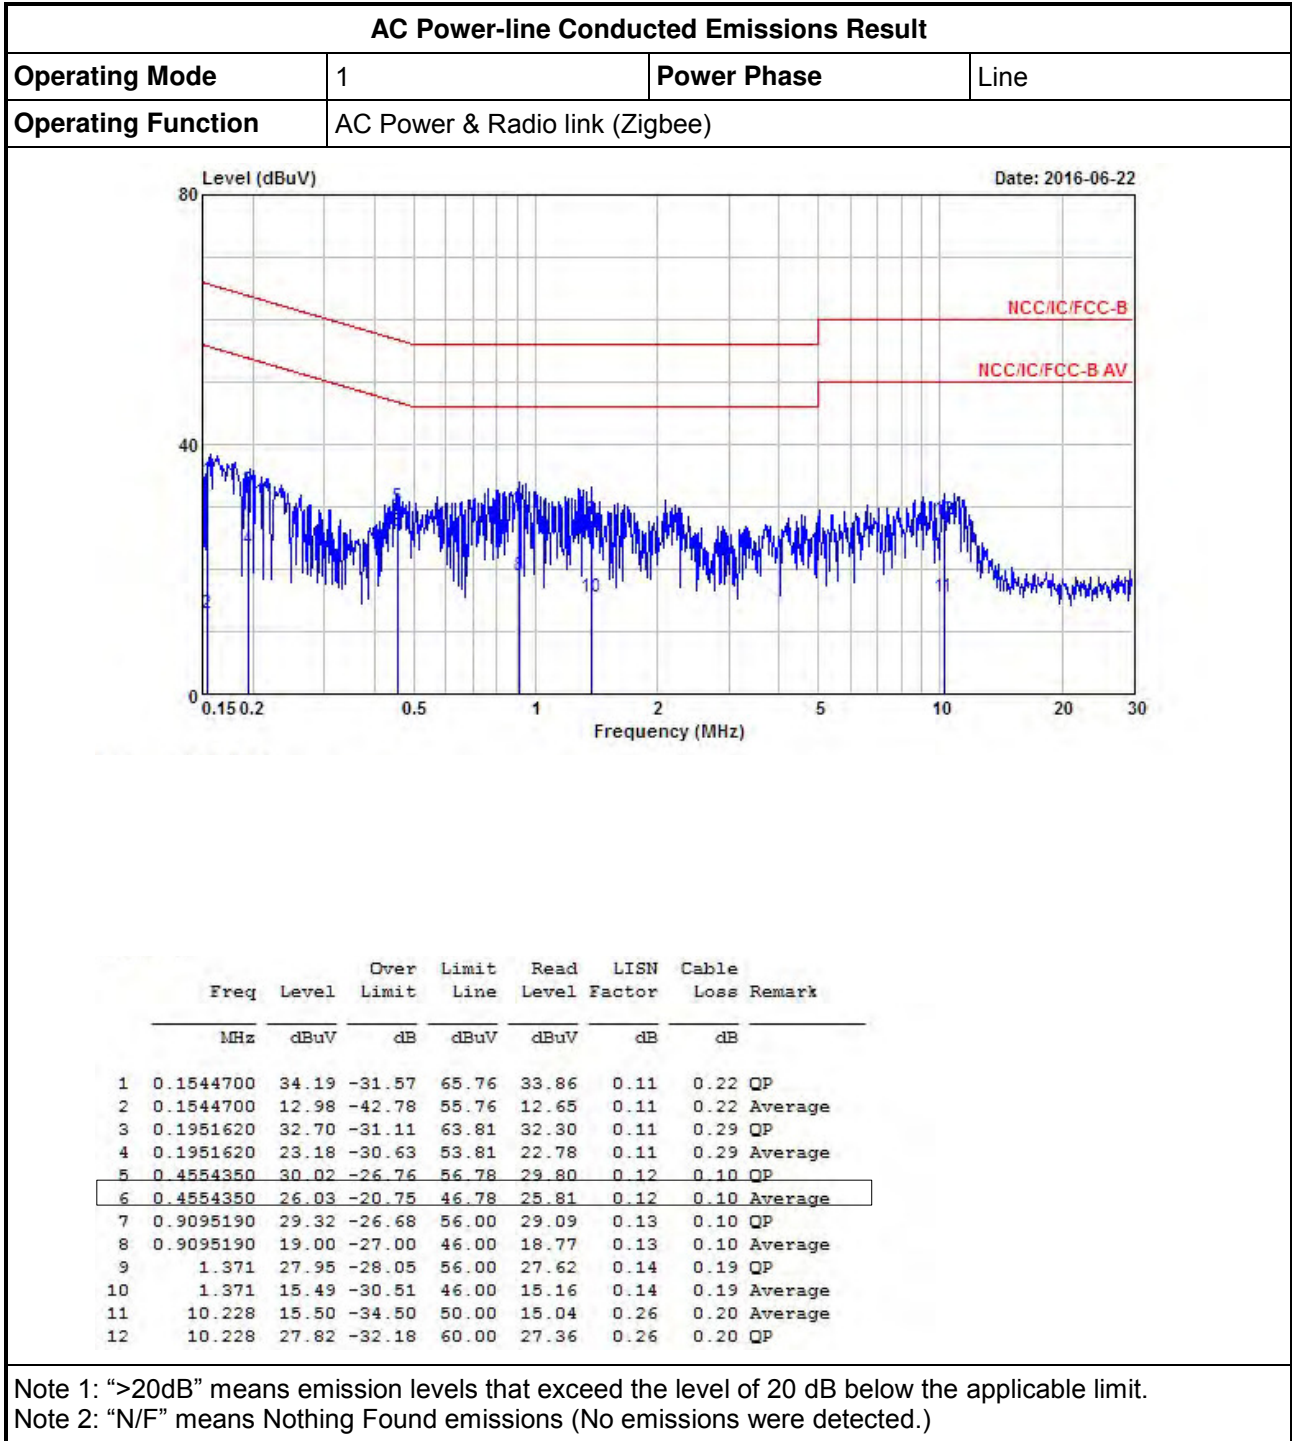






**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4G;Zigbee;5;1;1	1.531M	2.355M	2M36G1D	1.356M	2.28M



**Result**

Mode	Result	Limit	P1-N dB (Hz)	P1-OBW (Hz)
2.4G;Zigbee;5;1;1;2405;L;TN,VN	Pass	500k	1.375M	2.28M
2.4G;Zigbee;5;1;1;2440;M;TN,VN	Pass	500k	1.356M	2.324M
2.4G;Zigbee;5;1;1;2475;H;TN,VN	Pass	500k	1.531M	2.355M

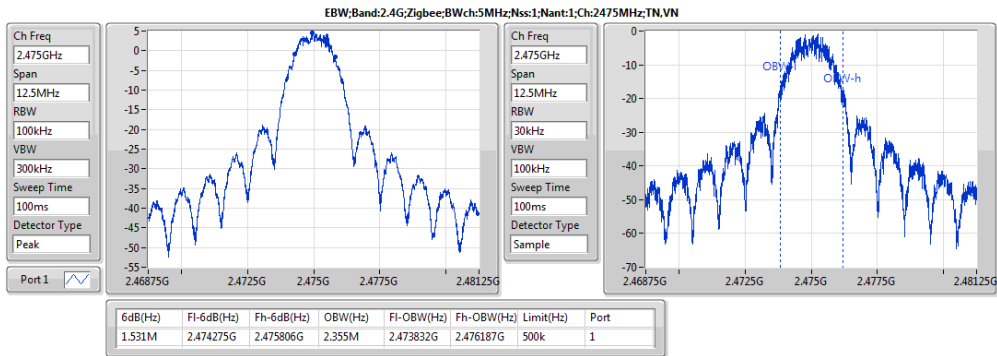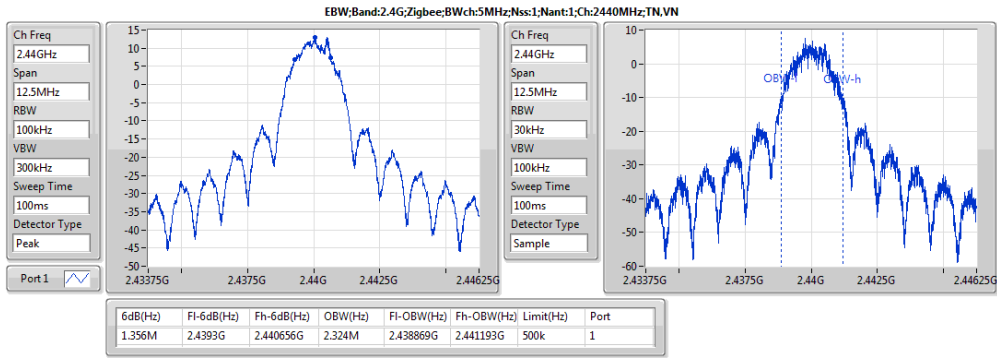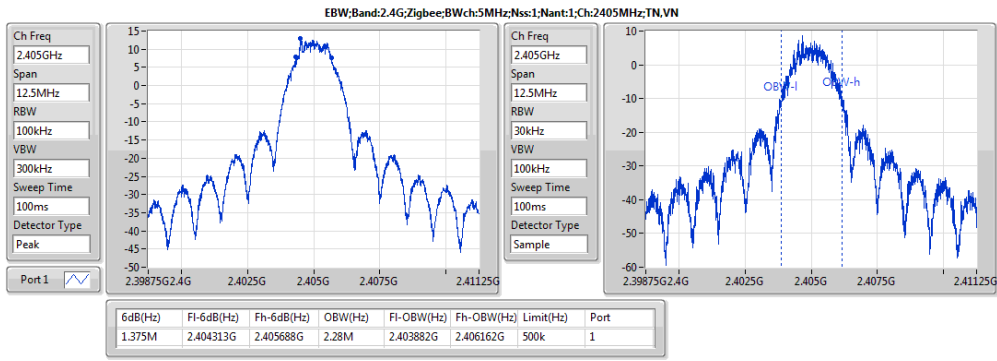



Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
2.4G;Zigbee;5;1;1	15.53	0.03573	17.23	0.05284

Result

Mode	Result	DG (dBi)	EIRP (dBm)	EIRP Lim. (dBm)	Sum (dBm)	Sum Lim. (dBm)	P1 (dBm)
2.4G;Zigbee;5;1;1;2405;L;TN,VN	Pass	1.70	17.23	36.00	15.53	30.00	15.53
2.4G;Zigbee;5;1;1;2440;M;TN,VN	Pass	1.70	16.59	36.00	14.89	30.00	14.89
2.4G;Zigbee;5;1;1;2475;H;TN,VN	Pass	1.70	9.04	36.00	7.34	30.00	7.34



Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
2.4G;Zigbee;5;1;1	15.48	0.03532	17.18	0.05224

Result

Mode	Result	DG (dBi)	EIRP (dBm)	EIRP Lim. (dBm)	Sum (dBm)	Sum Lim. (dBm)	P1 (dBm)
2.4G;Zigbee;5;1;1;2405;L;TN,VN	Pass	1.70	17.18	36.00	15.48	30.00	15.48
2.4G;Zigbee;5;1;1;2440;M;TN,VN	Pass	1.70	16.53	36.00	14.83	30.00	14.83
2.4G;Zigbee;5;1;1;2475;H;TN,VN	Pass	1.70	8.98	36.00	7.28	30.00	7.28






Summary

Mode	PD (dBm/RBW)	EIRP.PD (dBm/RBW)
2.4G;Zigbee;5;1;1	-1.14	0.56

Result

Mode	Result	Meas.RBW (Hz)	Lim.RBW (Hz)	BWCF (dB)	DG (dBi)	Sum.Max (dBm/RBW)	PD (dBm/RBW)	PD.Limit (dBm/RBW)	EIRP.PD (dBm/RBW)	EIRP.PD.Li m (dBm/RBW)	P1 (dBm/RBW)
2.4G;Zigbee;5;1;1;2405;L;TN,VN	Pass	3k	3k	0.00	1.70	-1.71	-1.71	8.00	-0.01	Inf	-1.71
2.4G;Zigbee;5;1;1;2440;M;TN,VN	Pass	3k	3k	0.00	1.70	-1.14	-1.14	8.00	0.56	Inf	-1.14
2.4G;Zigbee;5;1;1;2475;H;TN,VN	Pass	3k	3k	0.00	1.70	-11.37	-11.37	8.00	-9.67	Inf	-11.37

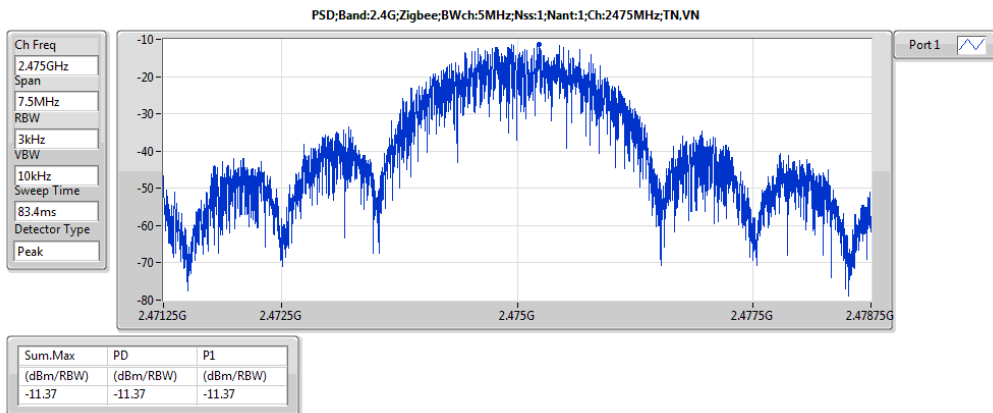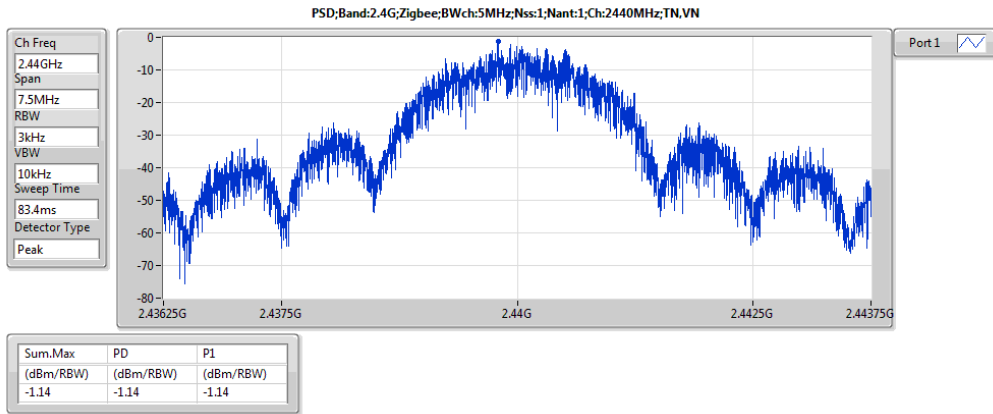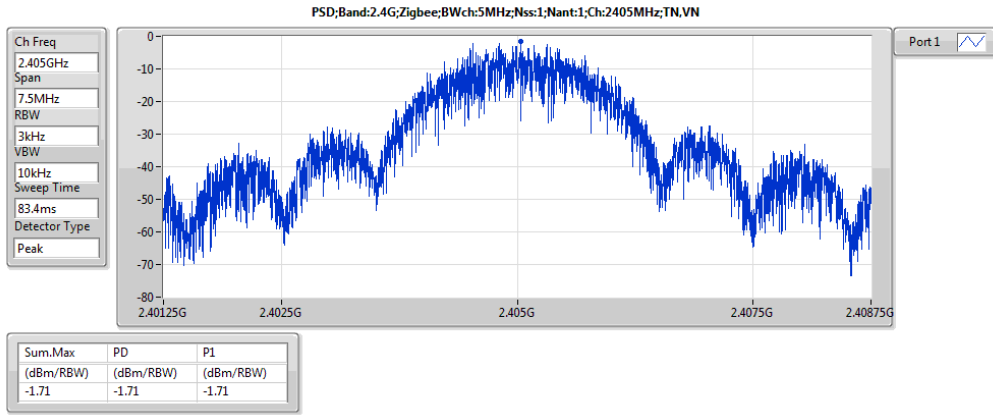



## Transmitter Radiated Bandedge Emissions

Appendix D

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N <sub>TX</sub>	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
Zigbee-5Mbps	1	2405	111.67	2399.960	72.42	39.25	20	H
Zigbee-5Mbps	1	2475	102.54	2485.088	60.11	42.43	20	H


Note 1: Measurement worst emissions of receive antenna polarization

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
Zigbee-5Mbps	1	2405	3	2389.760	60.74	74	2389.970	50.29	54	H
Zigbee-5Mbps	1	2475	3	2483.940	61.08	74	2483.940	50.69	54	H

Note 1: Measurement worst emissions of receive antenna polarization.  
 Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.




Transmitter Radiated Bandedge Emissions (Non-restricted Band)

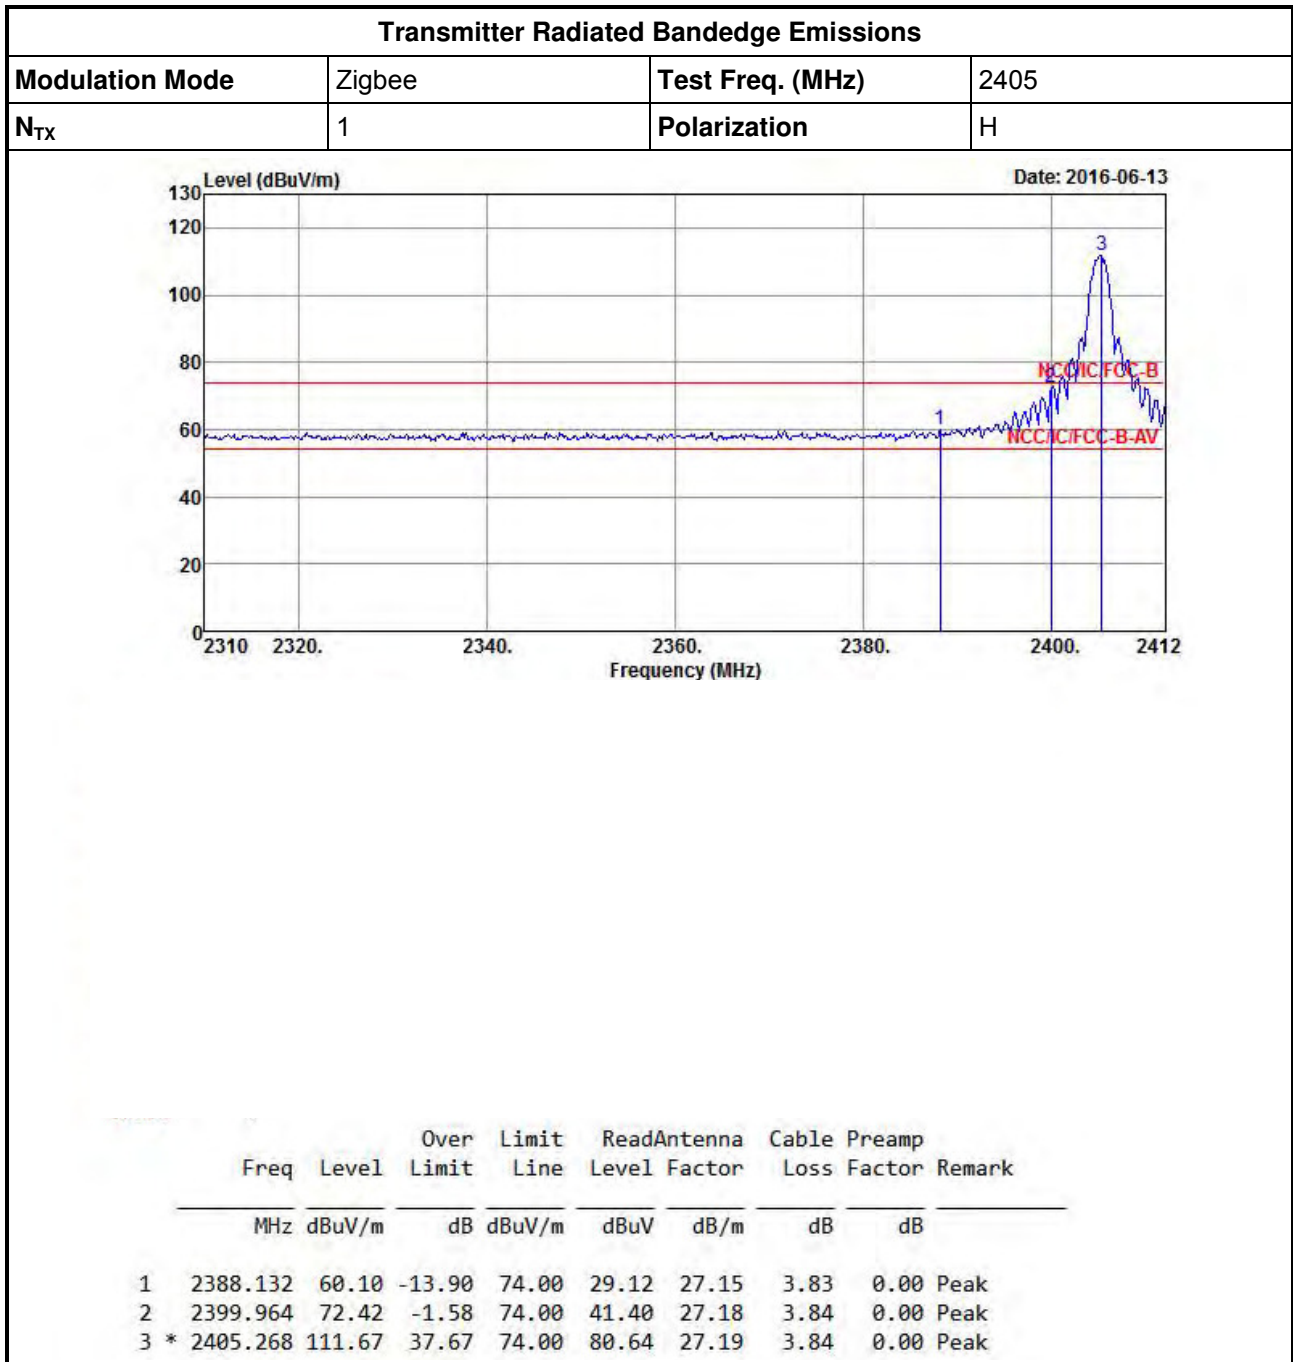




# Transmitter Radiated Bandedge Emissions

Appendix D

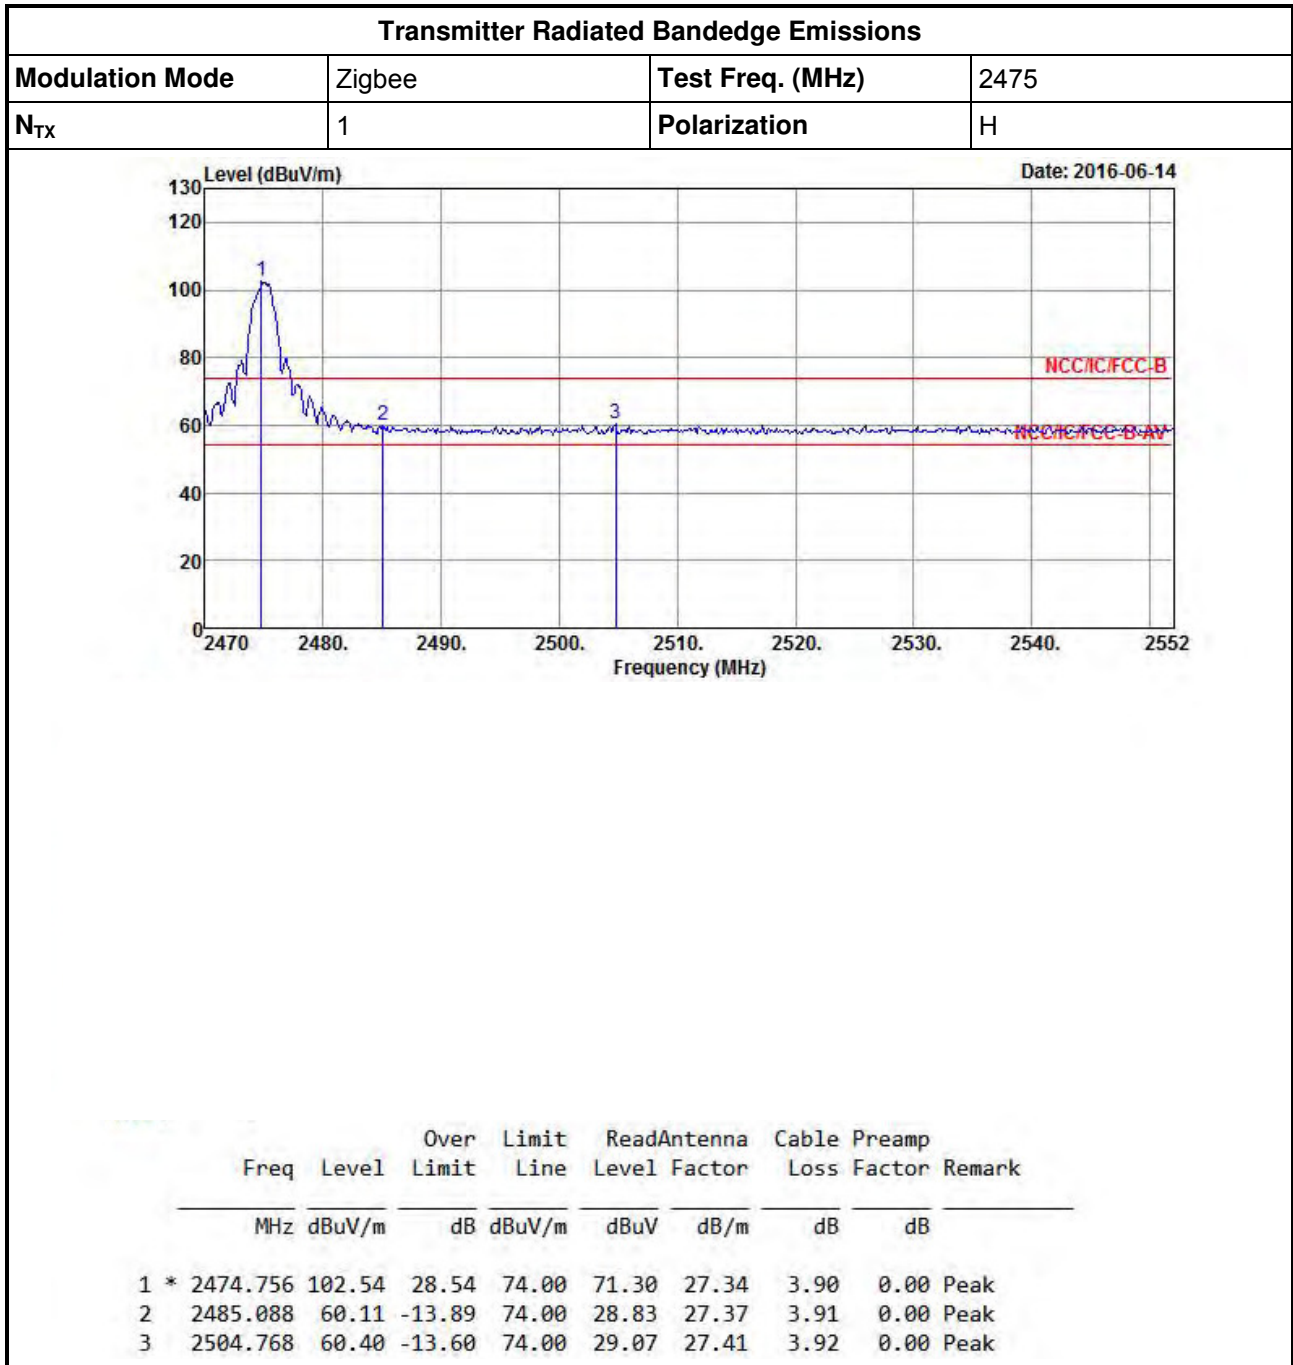




Transmitter Radiated Bandedge Emissions (Restricted Band)

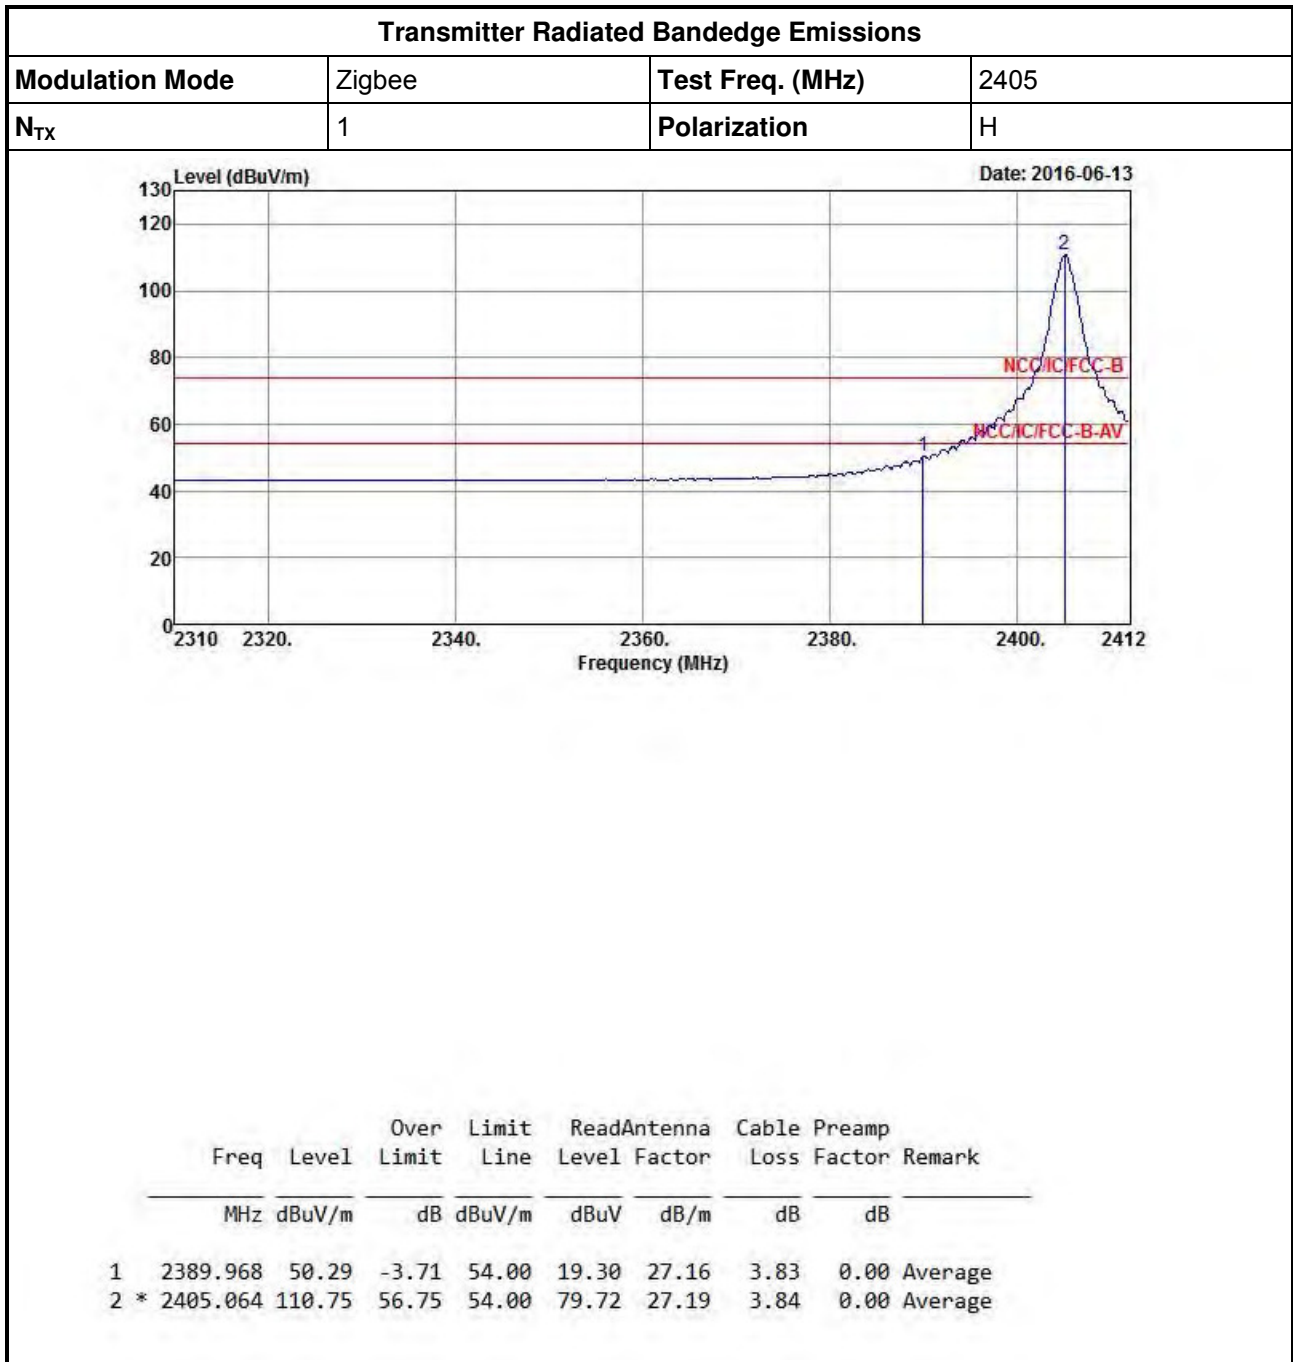



# Transmitter Radiated Bandedge Emissions


Appendix D

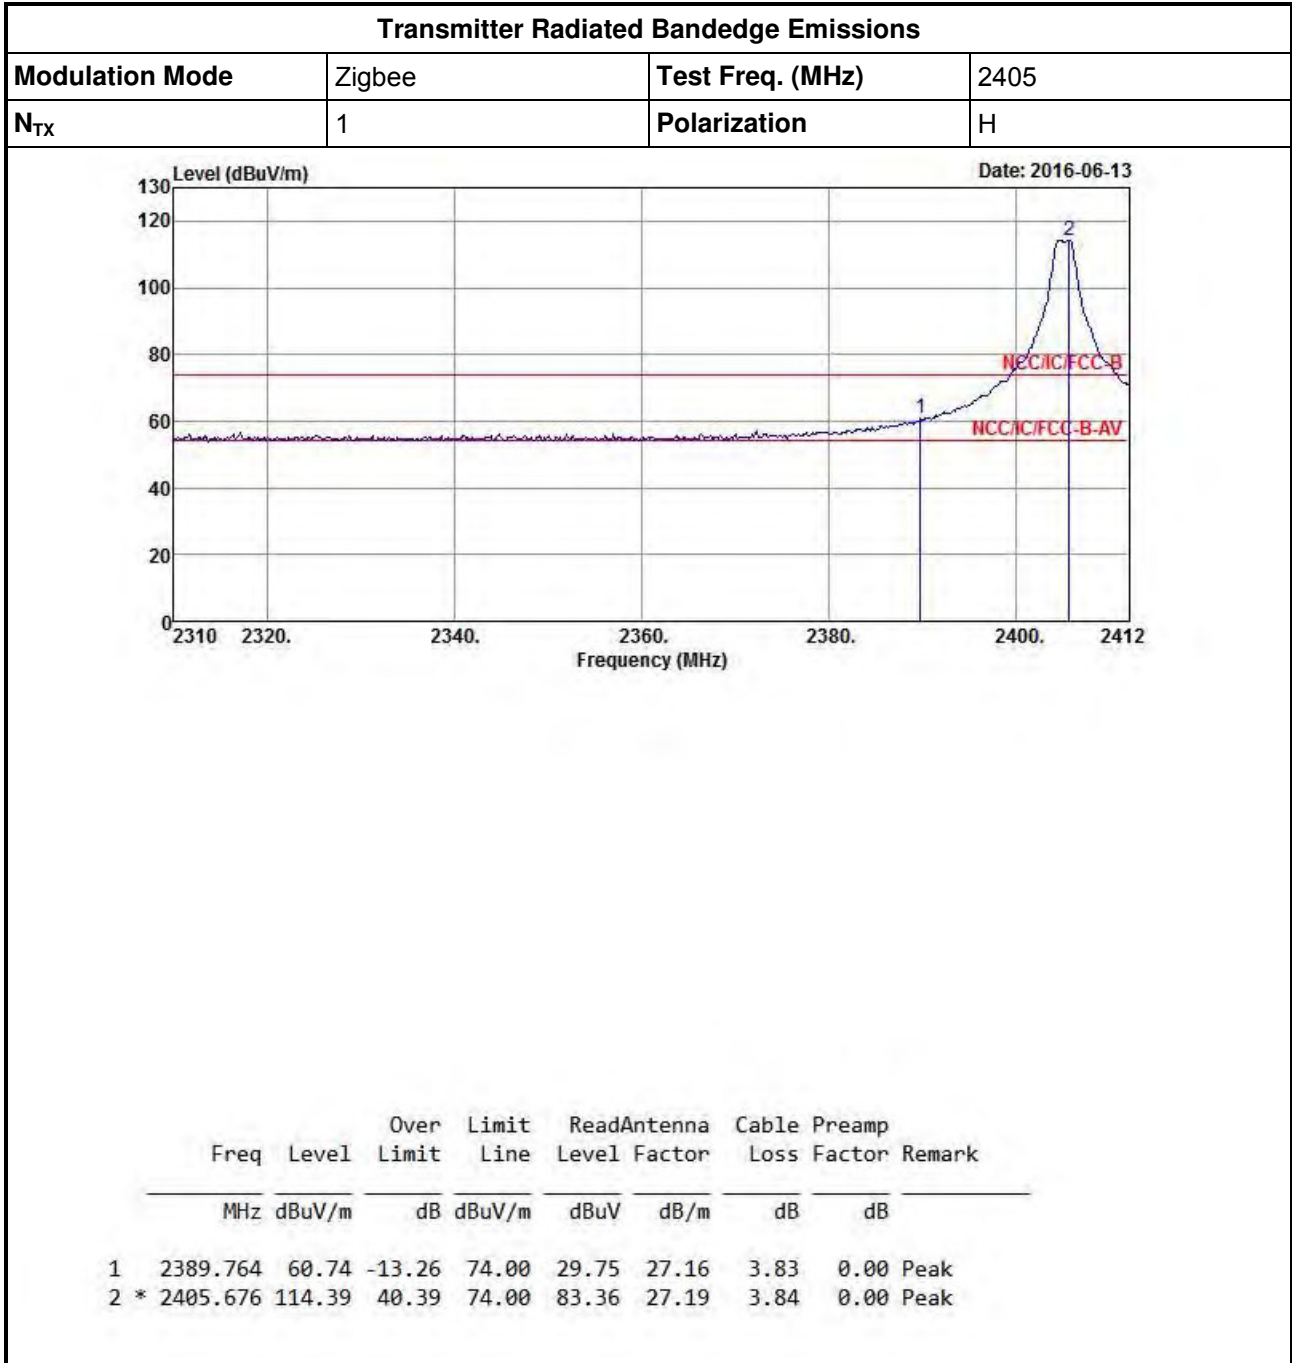



# Transmitter Radiated Bandedge Emissions


Appendix D

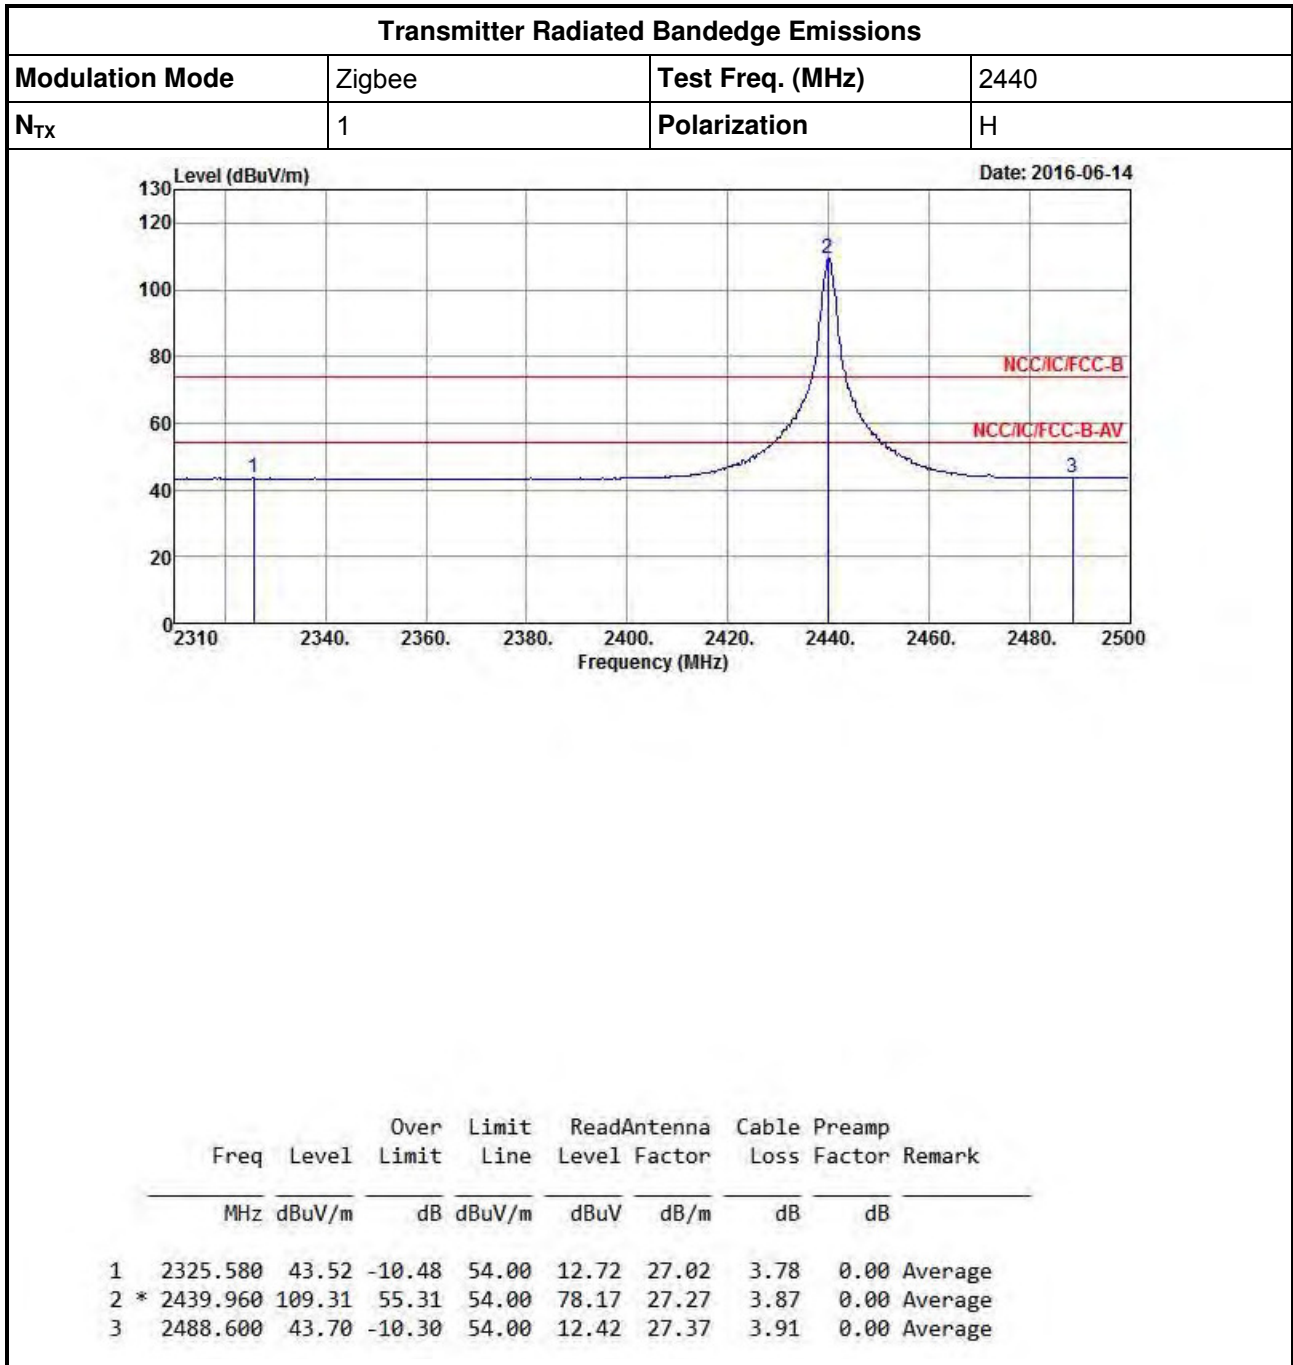



# Transmitter Radiated Bandedge Emissions


Appendix D

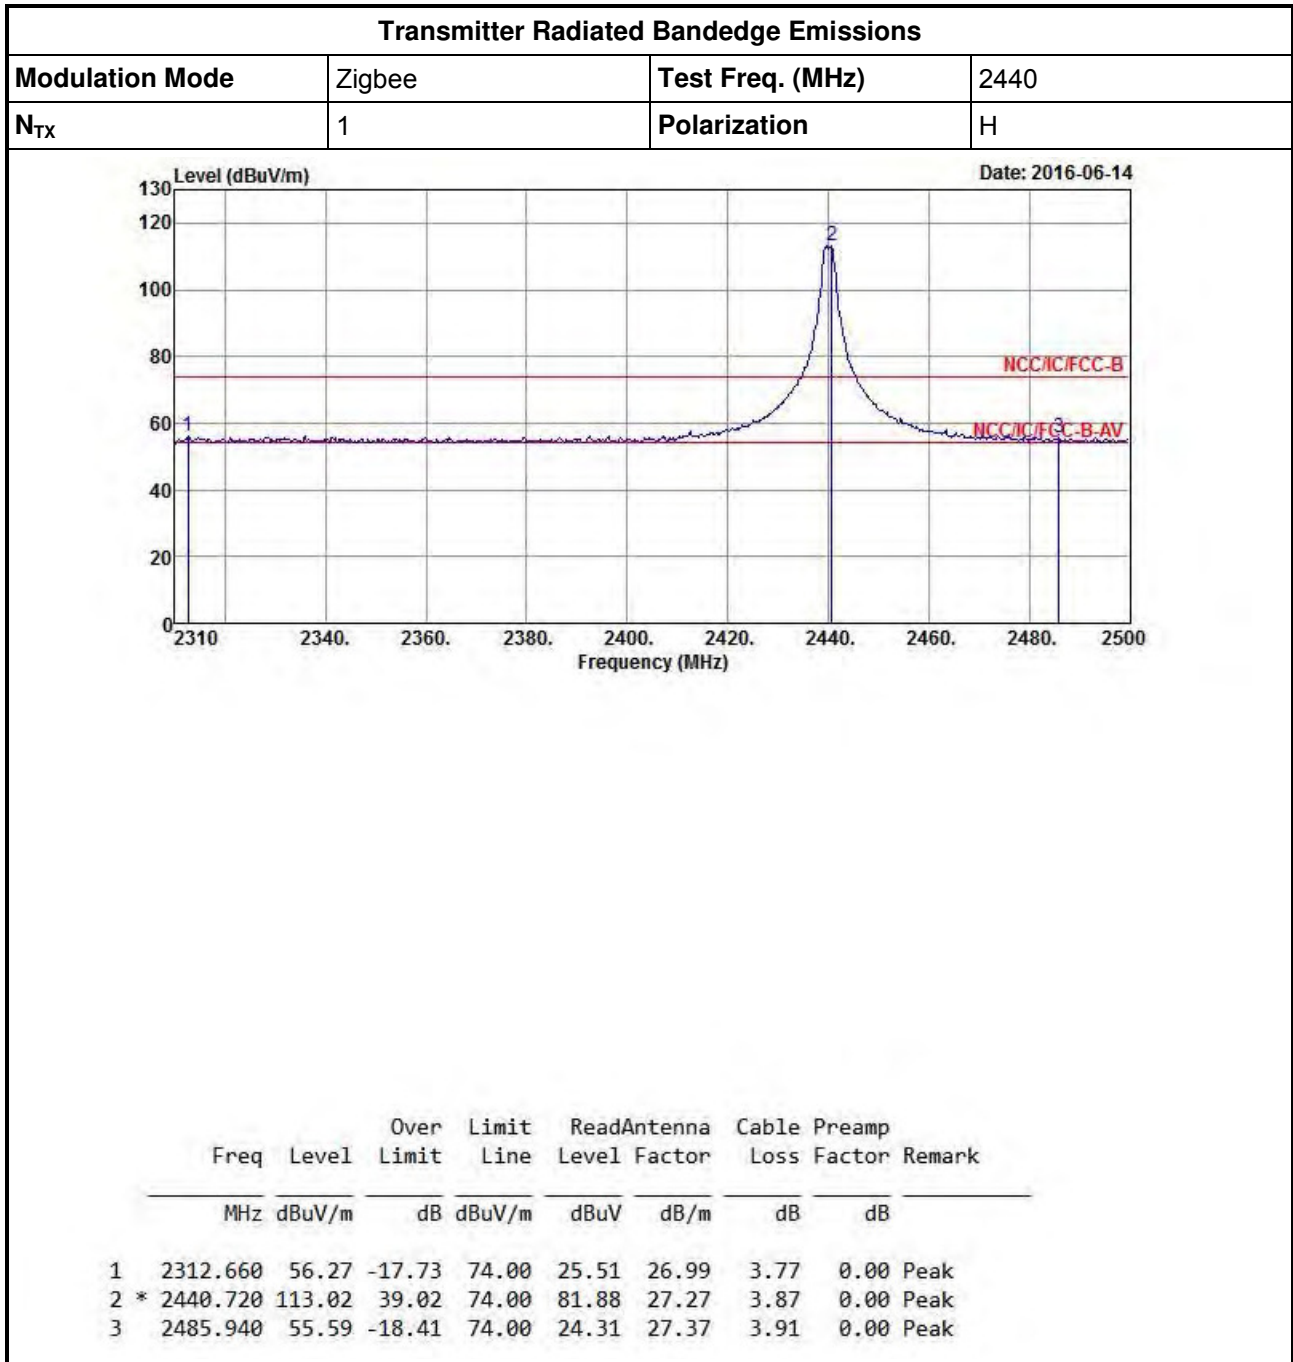



# Transmitter Radiated Bandedge Emissions


Appendix D

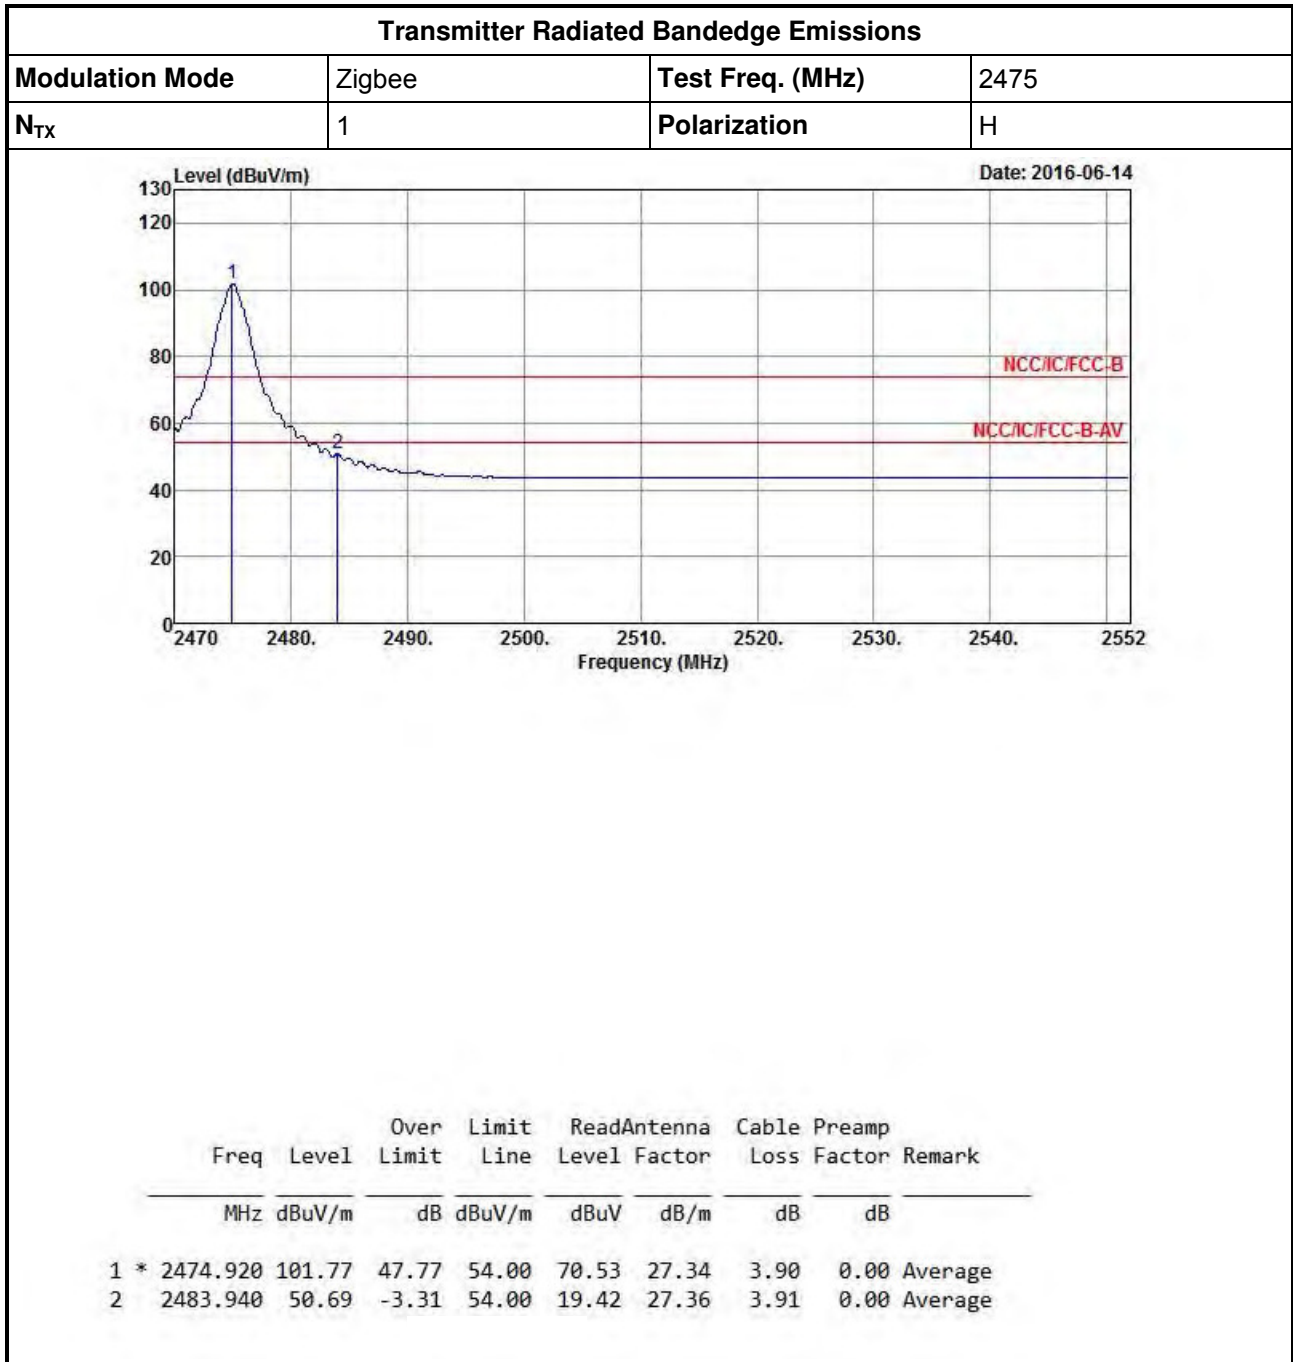



# Transmitter Radiated Bandedge Emissions


Appendix D

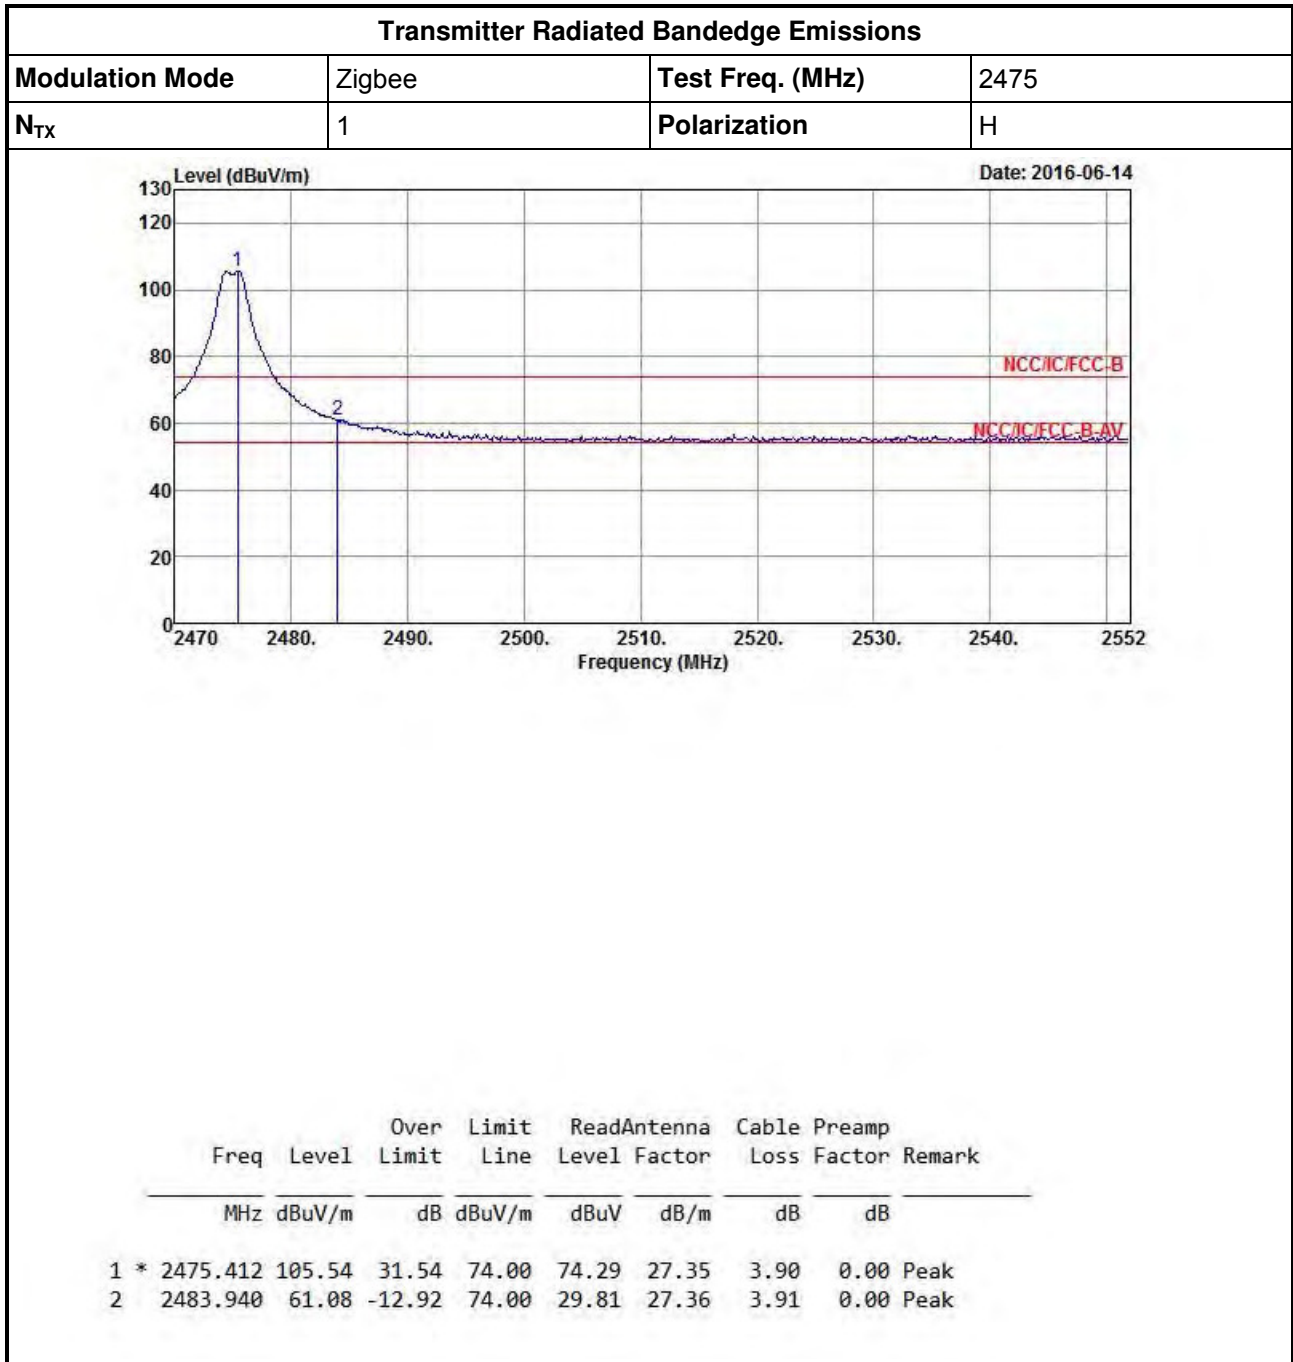




Transmitter Radiated Unwanted Emissions (Below 1GHz)


Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	H
Operating Function	Transmis Mode		

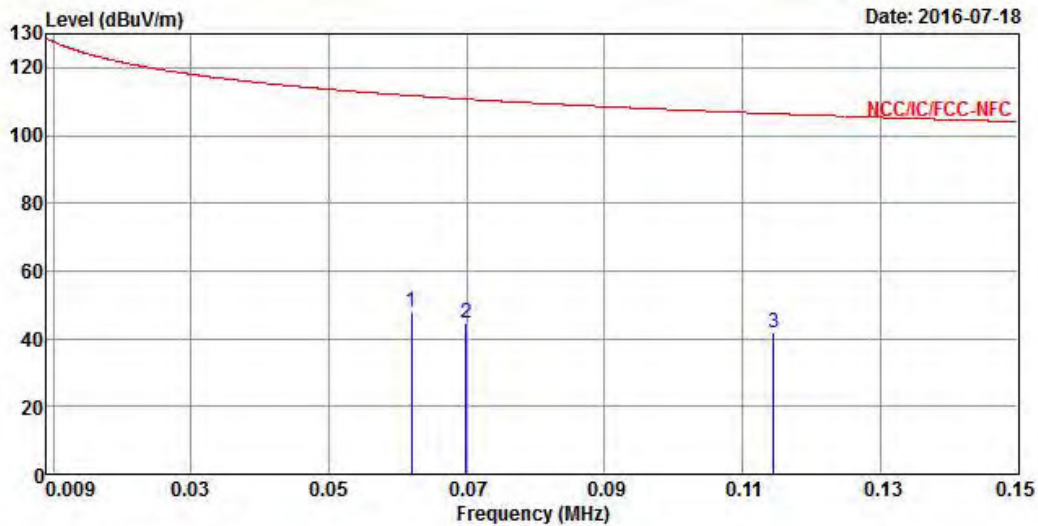


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	0.062	47.85	-63.91	111.76	26.70	21.00	0.15	0.00	Peak
2	0.070	44.42	-66.30	110.72	23.27	21.00	0.15	0.00	Peak
3	0.114	41.77	-64.66	106.43	20.55	21.06	0.16	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

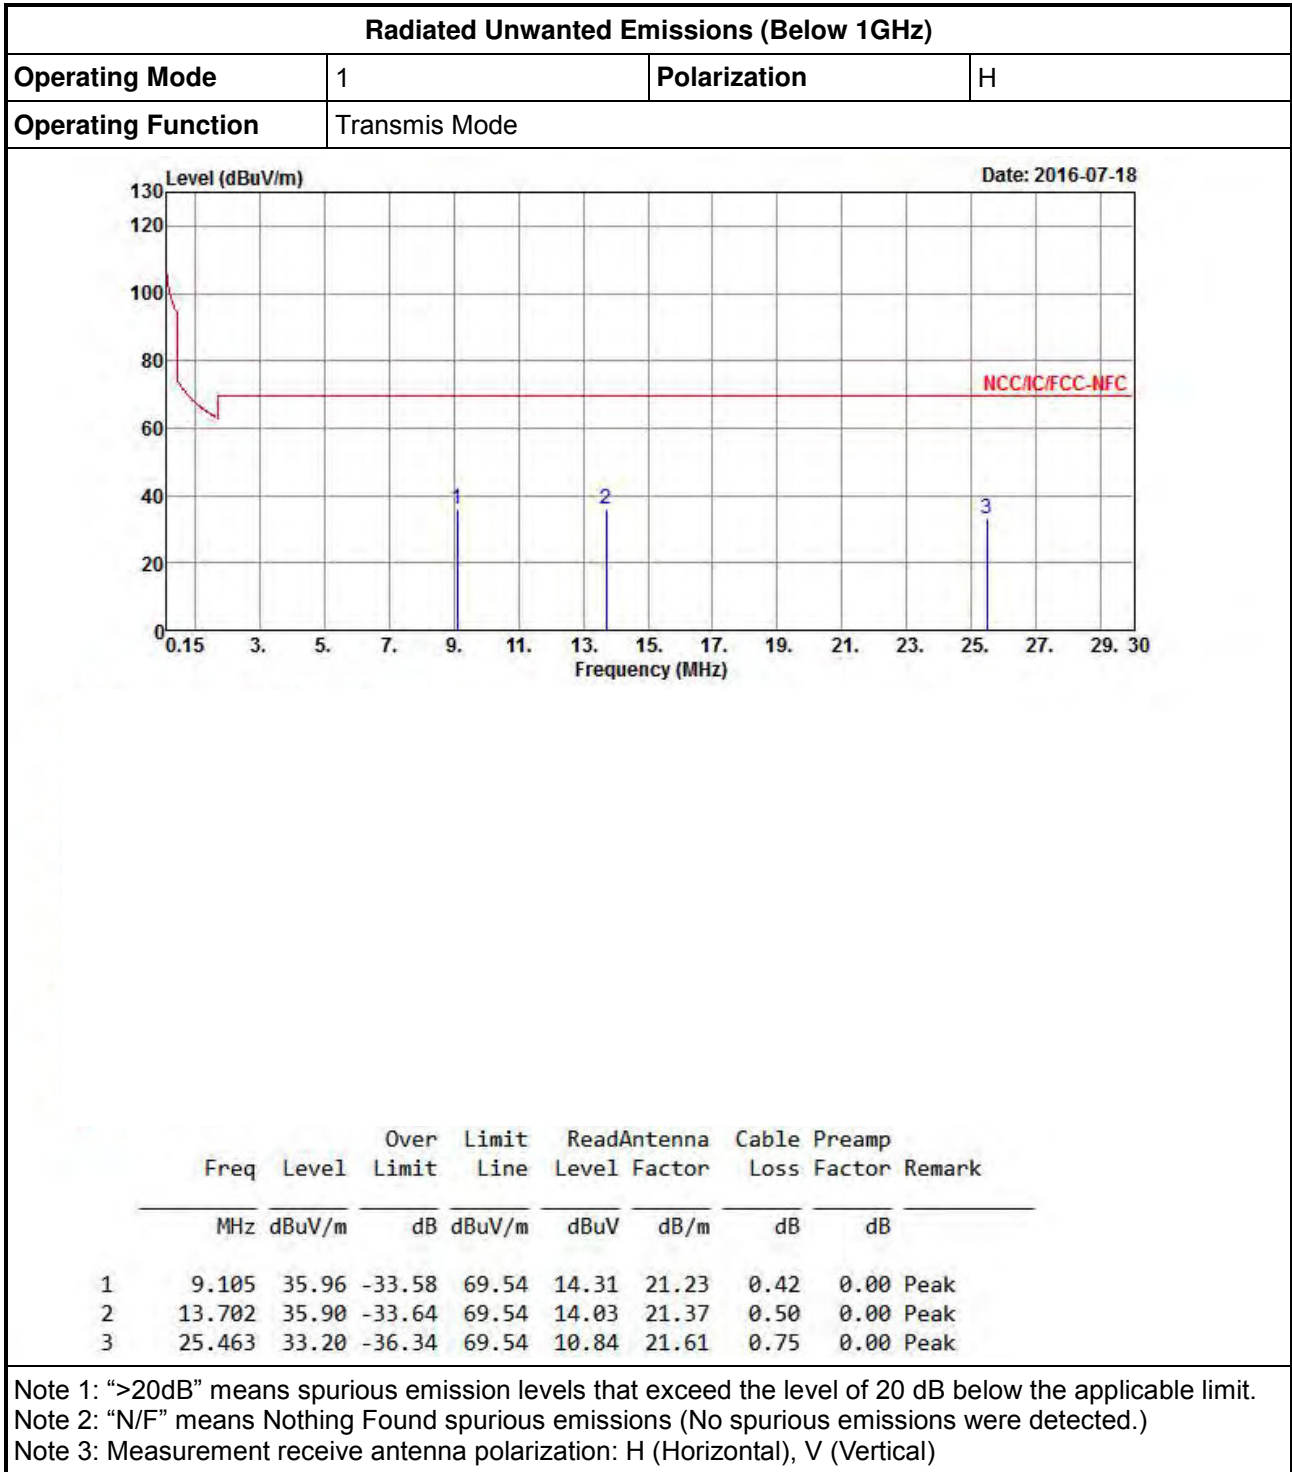

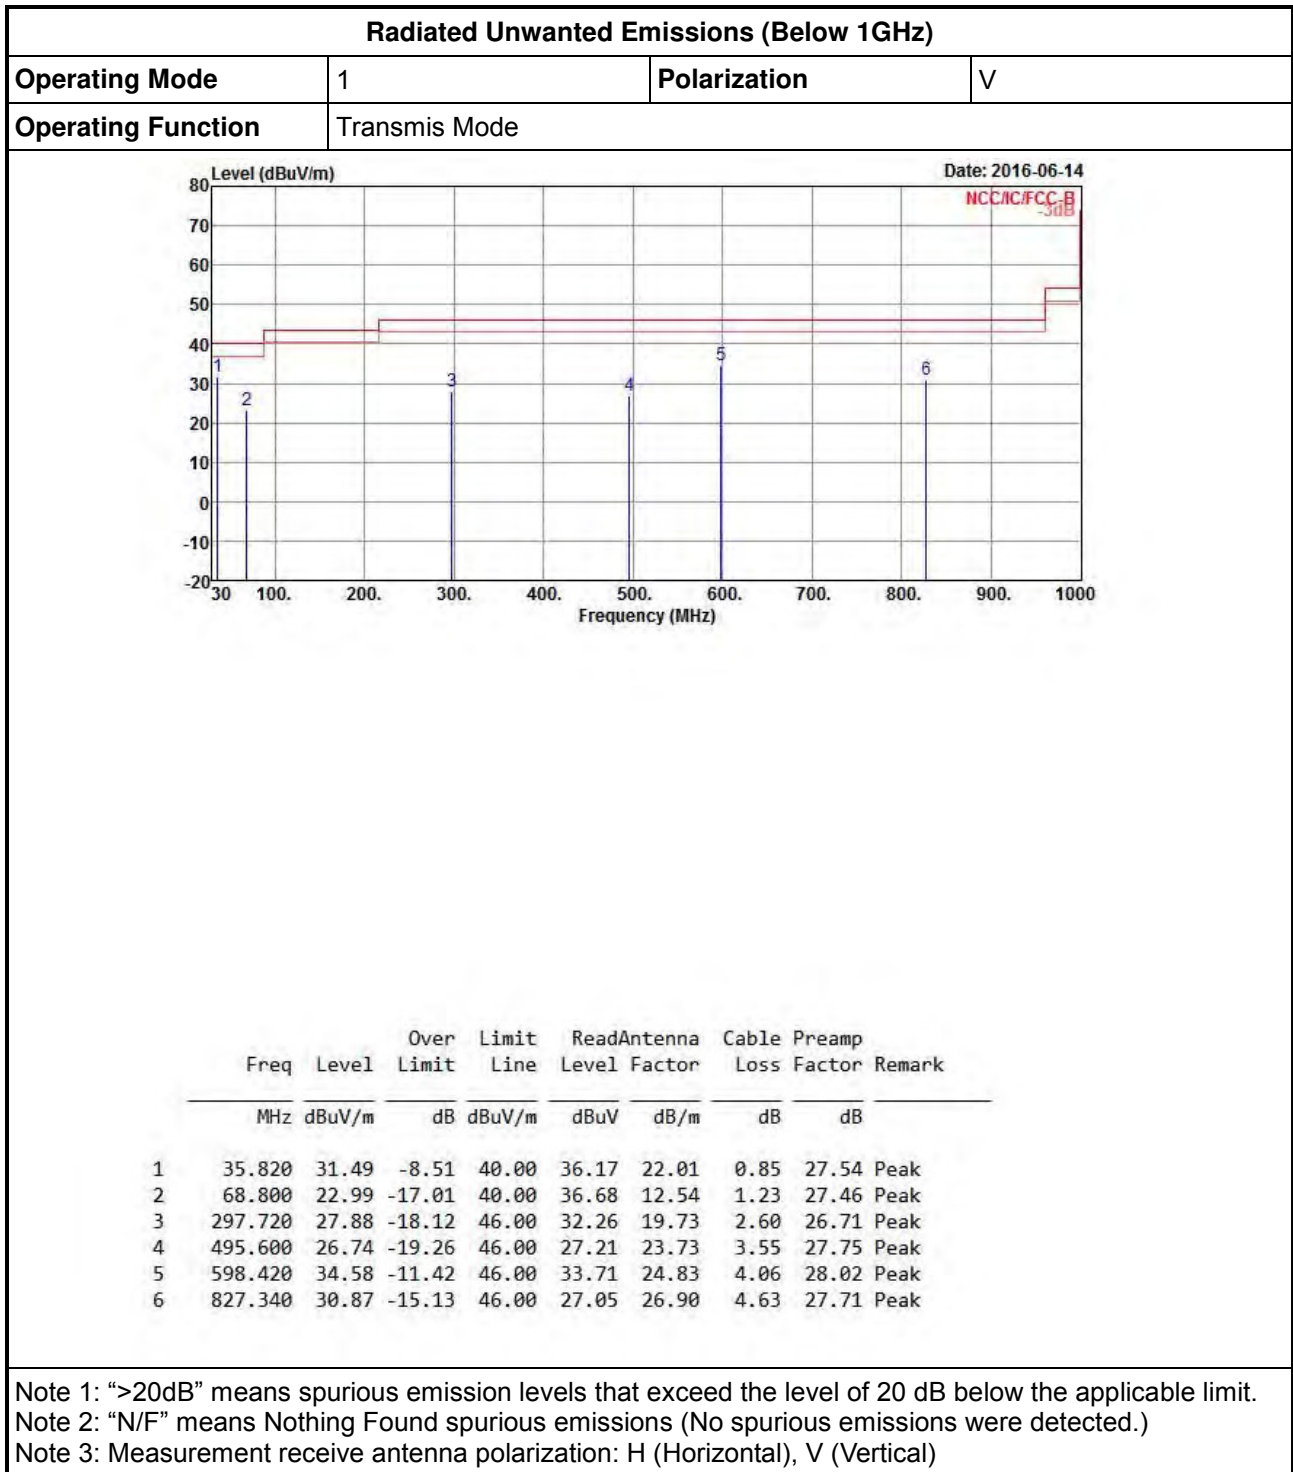


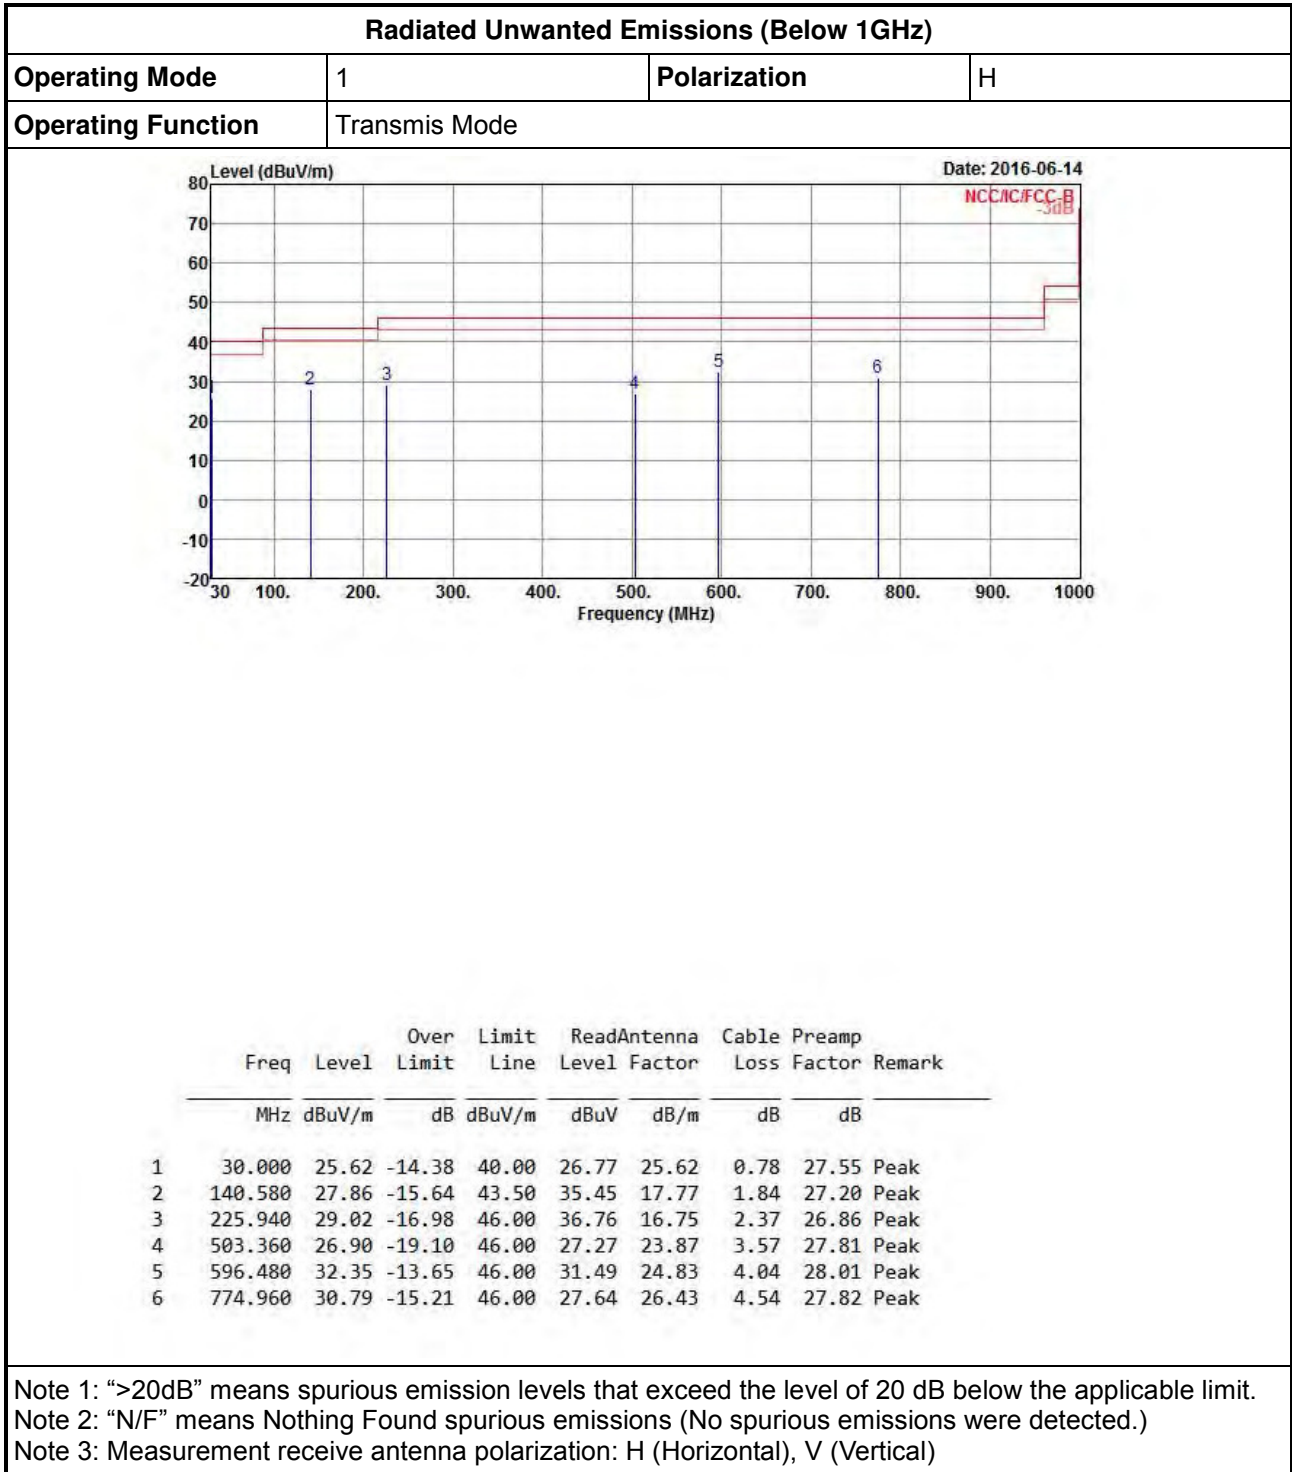




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	Zigbee-5Mbps	Test Freq. (MHz)	2405
Operating Function	Transmit	Polarization	V

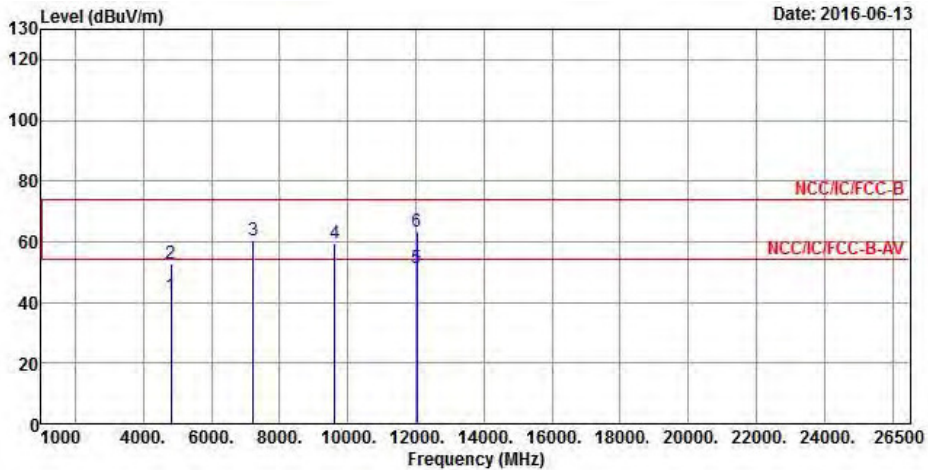

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4810.000	42.41	-11.59	54.00	38.46	31.13	5.37	32.55	Average
2	4810.000	52.59	-21.41	74.00	48.64	31.13	5.37	32.55	Peak
3	7215.000	60.66			50.78	35.62	7.04	32.78	Peak
4	9620.000	59.30			45.51	38.72	8.29	33.22	Peak
5	12025.000	51.37	-2.63	54.00	35.41	38.96	9.50	32.50	Average
6	12025.000	63.47	-10.53	74.00	47.51	38.96	9.50	32.50	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (114.68 dBuV/m).
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

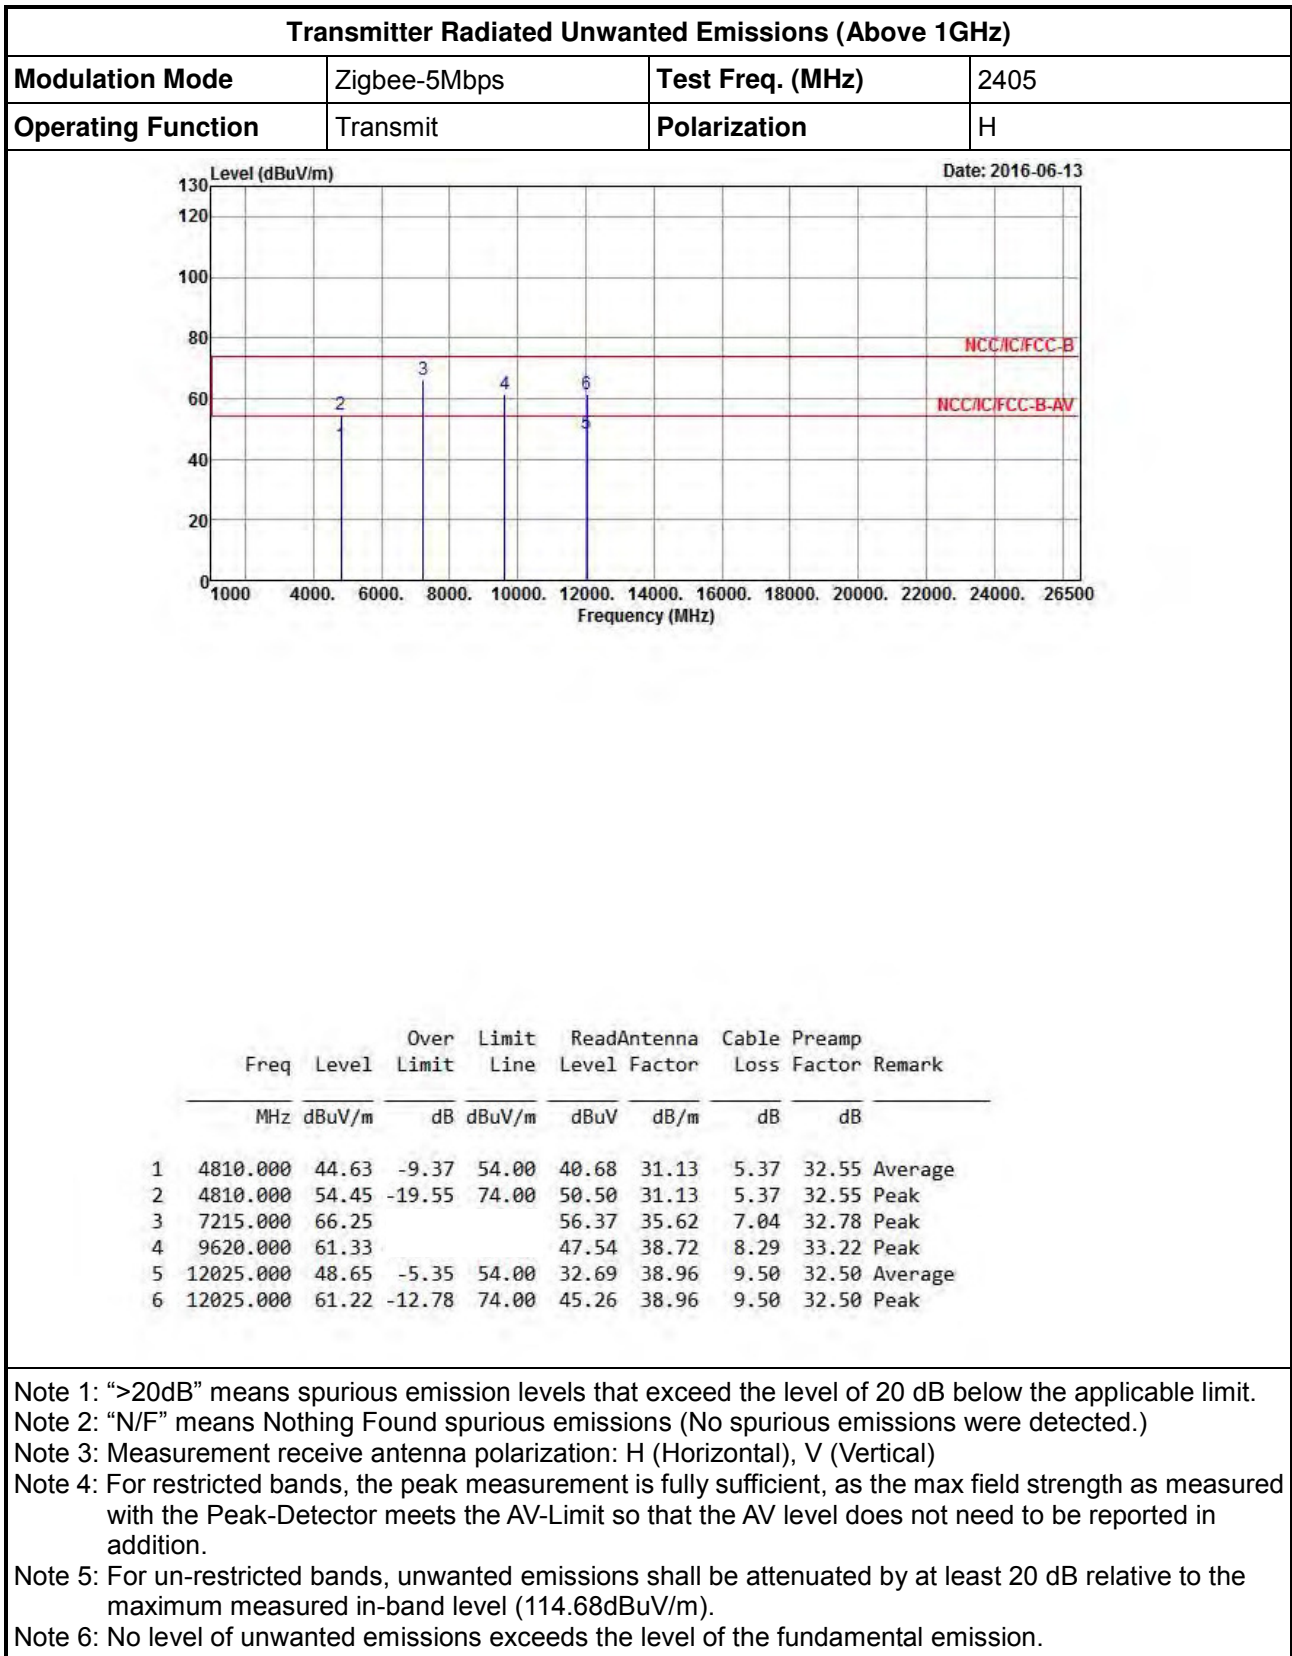



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																													
Modulation Mode	Zigbee-5Mbps	Test Freq. (MHz)	2440																																																																																										
Operating Function	Transmit	Polarization	V																																																																																										
<div style="display: flex; justify-content: space-between;"> <span>Level (dBuV/m)</span> <span>Date: 2016-06-14</span> </div>																																																																																													
<table border="1" style="width:100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.000</td> <td>41.33</td> <td>-12.67</td> <td>54.00</td> <td>37.12</td> <td>31.23</td> <td>5.51</td> <td>32.53 Average</td> </tr> <tr> <td>2</td> <td>4880.000</td> <td>51.72</td> <td>-22.28</td> <td>74.00</td> <td>47.51</td> <td>31.23</td> <td>5.51</td> <td>32.53 Peak</td> </tr> <tr> <td>3</td> <td>7320.000</td> <td>45.05</td> <td>-8.95</td> <td>54.00</td> <td>34.97</td> <td>35.87</td> <td>7.02</td> <td>32.81 Average</td> </tr> <tr> <td>4</td> <td>7320.000</td> <td>56.60</td> <td>-17.40</td> <td>74.00</td> <td>46.52</td> <td>35.87</td> <td>7.02</td> <td>32.81 Peak</td> </tr> <tr> <td>5</td> <td>9760.000</td> <td>62.12</td> <td></td> <td></td> <td>48.38</td> <td>38.75</td> <td>8.20</td> <td>33.21 Peak</td> </tr> <tr> <td>6</td> <td>12200.000</td> <td>47.57</td> <td>-6.43</td> <td>54.00</td> <td>31.88</td> <td>38.68</td> <td>9.35</td> <td>32.34 Average</td> </tr> <tr> <td>7</td> <td>12200.000</td> <td>60.17</td> <td>-13.83</td> <td>74.00</td> <td>44.48</td> <td>38.68</td> <td>9.35</td> <td>32.34 Peak</td> </tr> </tbody> </table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark		MHz	dBuV/m	Limit	Line	Level	Loss	Factor					dB	dBuV/m	dBuV	dB	dB		1	4880.000	41.33	-12.67	54.00	37.12	31.23	5.51	32.53 Average	2	4880.000	51.72	-22.28	74.00	47.51	31.23	5.51	32.53 Peak	3	7320.000	45.05	-8.95	54.00	34.97	35.87	7.02	32.81 Average	4	7320.000	56.60	-17.40	74.00	46.52	35.87	7.02	32.81 Peak	5	9760.000	62.12			48.38	38.75	8.20	33.21 Peak	6	12200.000	47.57	-6.43	54.00	31.88	38.68	9.35	32.34 Average	7	12200.000	60.17	-13.83	74.00	44.48	38.68	9.35	32.34 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark																																																																																					
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor																																																																																						
			dB	dBuV/m	dBuV	dB	dB																																																																																						
1	4880.000	41.33	-12.67	54.00	37.12	31.23	5.51	32.53 Average																																																																																					
2	4880.000	51.72	-22.28	74.00	47.51	31.23	5.51	32.53 Peak																																																																																					
3	7320.000	45.05	-8.95	54.00	34.97	35.87	7.02	32.81 Average																																																																																					
4	7320.000	56.60	-17.40	74.00	46.52	35.87	7.02	32.81 Peak																																																																																					
5	9760.000	62.12			48.38	38.75	8.20	33.21 Peak																																																																																					
6	12200.000	47.57	-6.43	54.00	31.88	38.68	9.35	32.34 Average																																																																																					
7	12200.000	60.17	-13.83	74.00	44.48	38.68	9.35	32.34 Peak																																																																																					
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)            Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)            Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.            Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (113.02 dBuV/m).            Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																																													



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																				
Modulation Mode	Zigbee-5Mbps	Test Freq. (MHz)	2440																																																																																																	
Operating Function	Transmit	Polarization	H																																																																																																	
<div style="display: flex; justify-content: space-between;"> <span>Level (dBuV/m)</span> <span>Date: 2016-06-14</span> </div> <p style="text-align: center;">Frequency (MHz)</p>																																																																																																				
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th></th> <th></th> <th></th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.000</td> <td>45.39</td> <td>-8.61</td> <td>54.00</td> <td>41.18</td> <td>31.23</td> <td>5.51</td> <td>32.53</td> <td>Average</td> </tr> <tr> <td>2</td> <td>4880.000</td> <td>55.03</td> <td>-18.97</td> <td>74.00</td> <td>50.82</td> <td>31.23</td> <td>5.51</td> <td>32.53</td> <td>Peak</td> </tr> <tr style="border: 2px solid black;"> <td>3</td> <td>7320.000</td> <td>51.68</td> <td>-2.32</td> <td>54.00</td> <td>41.60</td> <td>35.87</td> <td>7.02</td> <td>32.81</td> <td>Average</td> </tr> <tr> <td>4</td> <td>7320.000</td> <td>61.76</td> <td>-12.24</td> <td>74.00</td> <td>51.68</td> <td>35.87</td> <td>7.02</td> <td>32.81</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>9760.000</td> <td>61.97</td> <td></td> <td></td> <td>48.23</td> <td>38.75</td> <td>8.20</td> <td>33.21</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>12200.000</td> <td>48.21</td> <td>-5.79</td> <td>54.00</td> <td>32.52</td> <td>38.68</td> <td>9.35</td> <td>32.34</td> <td>Average</td> </tr> <tr> <td>7</td> <td>12200.000</td> <td>60.47</td> <td>-13.53</td> <td>74.00</td> <td>44.78</td> <td>38.68</td> <td>9.35</td> <td>32.34</td> <td>Peak</td> </tr> </tbody> </table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark		MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor				dB	dBuV/m	dBuV	dB/m	dB	dB	1	4880.000	45.39	-8.61	54.00	41.18	31.23	5.51	32.53	Average	2	4880.000	55.03	-18.97	74.00	50.82	31.23	5.51	32.53	Peak	3	7320.000	51.68	-2.32	54.00	41.60	35.87	7.02	32.81	Average	4	7320.000	61.76	-12.24	74.00	51.68	35.87	7.02	32.81	Peak	5	9760.000	61.97			48.23	38.75	8.20	33.21	Peak	6	12200.000	48.21	-5.79	54.00	32.52	38.68	9.35	32.34	Average	7	12200.000	60.47	-13.53	74.00	44.78	38.68	9.35	32.34	Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark																																																																																												
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor																																																																																												
			dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																												
1	4880.000	45.39	-8.61	54.00	41.18	31.23	5.51	32.53	Average																																																																																											
2	4880.000	55.03	-18.97	74.00	50.82	31.23	5.51	32.53	Peak																																																																																											
3	7320.000	51.68	-2.32	54.00	41.60	35.87	7.02	32.81	Average																																																																																											
4	7320.000	61.76	-12.24	74.00	51.68	35.87	7.02	32.81	Peak																																																																																											
5	9760.000	61.97			48.23	38.75	8.20	33.21	Peak																																																																																											
6	12200.000	48.21	-5.79	54.00	32.52	38.68	9.35	32.34	Average																																																																																											
7	12200.000	60.47	-13.53	74.00	44.78	38.68	9.35	32.34	Peak																																																																																											
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.            Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)            Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)            Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.            Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (113.02 dBuV/m).            Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																																																				



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																													
Modulation Mode	Zigbee-5Mbps	Test Freq. (MHz)	2475																																																																																										
Operating Function	Transmit	Polarization	V																																																																																										
<div style="display: flex; justify-content: space-between;"> <span>Level (dBuV/m)</span> <span>Date: 2016-06-14</span> </div>																																																																																													
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.000</td> <td>38.37</td> <td>-15.63</td> <td>54.00</td> <td>33.92</td> <td>31.33</td> <td>5.64</td> <td>32.52 Average</td> </tr> <tr> <td>2</td> <td>4950.000</td> <td>49.91</td> <td>-24.09</td> <td>74.00</td> <td>45.46</td> <td>31.33</td> <td>5.64</td> <td>32.52 Peak</td> </tr> <tr> <td>3</td> <td>7425.000</td> <td>43.50</td> <td>-10.50</td> <td>54.00</td> <td>33.19</td> <td>36.12</td> <td>7.03</td> <td>32.84 Average</td> </tr> <tr> <td>4</td> <td>7425.000</td> <td>55.28</td> <td>-18.72</td> <td>74.00</td> <td>44.97</td> <td>36.12</td> <td>7.03</td> <td>32.84 Peak</td> </tr> <tr> <td>5</td> <td>9900.000</td> <td>57.03</td> <td></td> <td></td> <td>43.26</td> <td>38.78</td> <td>8.20</td> <td>33.21 Peak</td> </tr> <tr> <td>6</td> <td>12375.000</td> <td>44.44</td> <td>-9.56</td> <td>54.00</td> <td>29.02</td> <td>38.40</td> <td>9.20</td> <td>32.18 Average</td> </tr> <tr> <td>7</td> <td>12375.000</td> <td>58.34</td> <td>-15.66</td> <td>74.00</td> <td>42.92</td> <td>38.40</td> <td>9.20</td> <td>32.18 Peak</td> </tr> </tbody> </table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark		MHz	dBuV/m	Limit	Line	Level	Loss	Factor					dB	dBuV/m	dBuV	dB	dB		1	4950.000	38.37	-15.63	54.00	33.92	31.33	5.64	32.52 Average	2	4950.000	49.91	-24.09	74.00	45.46	31.33	5.64	32.52 Peak	3	7425.000	43.50	-10.50	54.00	33.19	36.12	7.03	32.84 Average	4	7425.000	55.28	-18.72	74.00	44.97	36.12	7.03	32.84 Peak	5	9900.000	57.03			43.26	38.78	8.20	33.21 Peak	6	12375.000	44.44	-9.56	54.00	29.02	38.40	9.20	32.18 Average	7	12375.000	58.34	-15.66	74.00	42.92	38.40	9.20	32.18 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark																																																																																					
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor																																																																																						
			dB	dBuV/m	dBuV	dB	dB																																																																																						
1	4950.000	38.37	-15.63	54.00	33.92	31.33	5.64	32.52 Average																																																																																					
2	4950.000	49.91	-24.09	74.00	45.46	31.33	5.64	32.52 Peak																																																																																					
3	7425.000	43.50	-10.50	54.00	33.19	36.12	7.03	32.84 Average																																																																																					
4	7425.000	55.28	-18.72	74.00	44.97	36.12	7.03	32.84 Peak																																																																																					
5	9900.000	57.03			43.26	38.78	8.20	33.21 Peak																																																																																					
6	12375.000	44.44	-9.56	54.00	29.02	38.40	9.20	32.18 Average																																																																																					
7	12375.000	58.34	-15.66	74.00	42.92	38.40	9.20	32.18 Peak																																																																																					
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.54 dBuV/m).</p> <p>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																																													



Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																													
Modulation Mode	Zigbee-5Mbps	Test Freq. (MHz)	2475																																																																																										
Operating Function	Transmit	Polarization	H																																																																																										
<div style="display: flex; justify-content: space-between;"> <span>Level (dBuV/m)</span> <span>Date: 2016-06-14</span> </div>																																																																																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.000</td> <td>40.71</td> <td>-13.29</td> <td>54.00</td> <td>36.26</td> <td>31.33</td> <td>5.64</td> <td>32.52 Average</td> </tr> <tr> <td>2</td> <td>4950.000</td> <td>51.41</td> <td>-22.59</td> <td>74.00</td> <td>46.96</td> <td>31.33</td> <td>5.64</td> <td>32.52 Peak</td> </tr> <tr> <td>3</td> <td>7425.000</td> <td>45.24</td> <td>-8.76</td> <td>54.00</td> <td>34.93</td> <td>36.12</td> <td>7.03</td> <td>32.84 Average</td> </tr> <tr> <td>4</td> <td>7425.000</td> <td>56.50</td> <td>-17.50</td> <td>74.00</td> <td>46.19</td> <td>36.12</td> <td>7.03</td> <td>32.84 Peak</td> </tr> <tr> <td>5</td> <td>9900.000</td> <td>56.66</td> <td></td> <td></td> <td>42.89</td> <td>38.78</td> <td>8.20</td> <td>33.21 Peak</td> </tr> <tr> <td>6</td> <td>12375.000</td> <td>44.39</td> <td>-9.61</td> <td>54.00</td> <td>28.97</td> <td>38.40</td> <td>9.20</td> <td>32.18 Average</td> </tr> <tr> <td>7</td> <td>12375.000</td> <td>57.99</td> <td>-16.01</td> <td>74.00</td> <td>42.57</td> <td>38.40</td> <td>9.20</td> <td>32.18 Peak</td> </tr> </tbody> </table>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark		MHz	dBuV/m	Limit	Line	Level	Loss	Factor					dB	dBuV/m	dBuV	dB	dB		1	4950.000	40.71	-13.29	54.00	36.26	31.33	5.64	32.52 Average	2	4950.000	51.41	-22.59	74.00	46.96	31.33	5.64	32.52 Peak	3	7425.000	45.24	-8.76	54.00	34.93	36.12	7.03	32.84 Average	4	7425.000	56.50	-17.50	74.00	46.19	36.12	7.03	32.84 Peak	5	9900.000	56.66			42.89	38.78	8.20	33.21 Peak	6	12375.000	44.39	-9.61	54.00	28.97	38.40	9.20	32.18 Average	7	12375.000	57.99	-16.01	74.00	42.57	38.40	9.20	32.18 Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark																																																																																					
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor																																																																																						
			dB	dBuV/m	dBuV	dB	dB																																																																																						
1	4950.000	40.71	-13.29	54.00	36.26	31.33	5.64	32.52 Average																																																																																					
2	4950.000	51.41	-22.59	74.00	46.96	31.33	5.64	32.52 Peak																																																																																					
3	7425.000	45.24	-8.76	54.00	34.93	36.12	7.03	32.84 Average																																																																																					
4	7425.000	56.50	-17.50	74.00	46.19	36.12	7.03	32.84 Peak																																																																																					
5	9900.000	56.66			42.89	38.78	8.20	33.21 Peak																																																																																					
6	12375.000	44.39	-9.61	54.00	28.97	38.40	9.20	32.18 Average																																																																																					
7	12375.000	57.99	-16.01	74.00	42.57	38.40	9.20	32.18 Peak																																																																																					
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (105.54dBuV/m).</p> <p>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																																																													