

## RESOLUCION 737 - SUBTEL

Fecha de publicación: 10/3/2026

---

### **Información Comercial**

#### **Nombre comercial del equipo**

Código	Descripción
929003666701	Philips HueWA 4.2W GU10 1P EU

**Fabricante:** Signify (China) Investment Co., Ltd.

**Importador o representante en Chile:** SIGNIFY CHILENA S.A.

**Domicilio:** El Bosque Norte 0211, Las Condes - Santiago

**Correo electrónico de contacto:** tomas.aragona@signify.com

**Sitio Web:** philips-hue.com/es-cl

---

### **Características técnicas**

Tipo de equipo	Lámpara LED
Marca	Hue
Modelo	9290036667
Módulo	EFR32RM21
Tecnología o modulación	GFSK
Frecuencias	BT: 2402-2480; ZigBee: 2405-2480 MHz
Ganancia de antena (dBi)	-5,0 dBi
P.I.R.E. (EIRP)	BT: 8,24 mW (9,16 dBm); ZigBee: 8,31 mW (9,2 dBm)

---

### **Declaración de conformidad**

*“El equipo previamente individualizado cumple con las disposiciones establecidas en la Norma Técnica de Equipos de alcance reducido, aprobada por la resolución exenta N° 1.985, de 2017, de la Subsecretaría de Telecomunicaciones.”*

---

Firma del Importador/Responsable:

Nombre de quien firma: Tomás Aragona



Cargo: Representante Legal

- ANT.: 1) Nota ingreso Subtel N° 121192 de 16.09.2024.  
2) Resolución Exenta N° 1.985 de 2017 y sus modificaciones, de la Subsecretaría de Telecomunicaciones.  
3) Resolución Exenta N° 3.103 de 2012, de la Subsecretaría de Telecomunicaciones.  
4) Ley N° 18.168, General de Telecomunicaciones.  
5) Resolución Exenta N° 470 de 13.02.2013, que Faculta a los Jefes de División y de Departamento para firmar “Por orden del Subsecretario de Telecomunicaciones” y delega las facultades que indica.

MAT.: Certifica equipo de alcance reducido.

DE : SUBSECRETARÍA DE TELECOMUNICACIONES

A : MBSERVICES

1. De acuerdo a la información proporcionada por documento de ANT. 1), esta Subsecretaría de Estado extiende el presente certificado para operar dentro del país, condicionado al estricto cumplimiento de lo señalado en letra j.1) del artículo 1° de la norma de ANT. 2).

Tipo de equipo	Philips HueWA 4.2W GU10 1P EU (LÁMPARA LED)
Marca	HUE
Modelo(s)	9290036667
Fabricante	Signify (China) Investment Co., Ltd.
Frecuencia de operación	BT: 2402-2480; ZigBee: 2405-2480 MHz
Potencia máxima radiada	BT: 8,24 mW (9,16 dBm); ZigBee: 8,31 mW (9,2 dBm)
Restricciones	Estos equipos deben emplear técnicas de compartición de frecuencias

2. El incumplimiento de lo dispuesto en el presente certificado, será sancionado de acuerdo a las disposiciones legales vigentes. Estos equipos no deberán provocar interferencias a servicios de concesionarias de telecomunicaciones y no estarán protegidos respecto de interferencias que eventualmente puedan recibir.

Saluda atentamente a Ud.,  
Por orden del Subsecretario de Telecomunicaciones,

**DISTRIBUCIÓN:**

- MBSERVICES: [Laboratorio@mbservices.cl](mailto:Laboratorio@mbservices.cl)  
- Oficina de Partes.

Francisco Javier Pizarro Sepulveda  
Jefe División Fiscalización  
17/10/2024 11:52



Test report No: 4388006.50

## TEST REPORT

### Radio Spectrum Matters (RF)

Identification of item tested	LED lamp
Trademark	PHILIPS
Model and /or type reference	9290018216A, 9290018217A, 9290024692A, 9290024693A
Features	220-240 Vac, 50/60 Hz, 9 / 9,5 W
Applicant's name / address	Signify (China) Investment Co., Ltd. Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai 200233, China
Test method requested, standard	ETSI EN 300 328 V2.2.2 (2019-07)
Verdict Summary	COMPLIANCE
Tested by (name & signature)	Harry Deng 
Approved by (name & signature)	Tim Yan 
Date of issue	2022-05-25
Report template No	TRF_EMG 2017-06-328

## INDEX

---

	page
General conditions .....	4
Uncertainty .....	4
Environmental conditions .....	4
Possible test case verdicts .....	4
Definition of symbols used in this test report.....	5
Abbreviations .....	5
Document History .....	5
Remarks and Comments .....	5
1 General Information .....	6
1.1 General Description of the Item(s) .....	6
1.2 Test data.....	8
1.3 The environment(s) in which the EUT is intended to be used .....	8
1.4 Classification of Receivers according to ETSI EN 300328.....	8
2 Description of Test Setup .....	9
2.1 Operating mode(s) used for tests .....	9
2.2 Support / Auxiliary equipment / unit / software for the EUT .....	9
2.3 Test Configuration / Block diagram used for tests .....	9
3 Verdict summary section .....	10
3.1 Standards .....	10
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	10
3.3 Overview of results.....	10
3.4 Measurement procedure .....	11
4 Transmitter Test Results .....	12
4.1 RF output power.....	12
4.2 Power Spectral Density .....	14
4.3 Occupied Channel Bandwidth .....	16
4.4 Transmitter unwanted emissions in the out-of-band domain.....	22
4.5 Transmitter unwanted emissions in the spurious domain .....	27
5 Receiver Test Results .....	28
5.1 Receiver spurious emissions .....	28
5.2 Receiver Blocking .....	29
6 Identification of the Equipment Under Test .....	31
Annex 1 – Measurement Uncertainty.....	34
Annex 2 - Used Equipment .....	35

Annex 3 - Test Photos..... 36

## GENERAL CONDITIONS

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.
5. This report will not be used for social proof function in China market.

## UNCERTAINTY

---

For all measurements where guidance for the calculation of the instrumentation uncertainty of a measurement is specified in EN 55016-4-2 (CISPR 16-4-2), EN/IEC 61000-4 series or a product standard, the measurement instrumentation uncertainty has been calculated and applied in accordance with these standards.

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

## ENVIRONMENTAL CONDITIONS

---

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa – 106 kPa

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

## POSSIBLE TEST CASE VERDICTS

---

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

## DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report/test/EUT.			
<input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report/test/EUT.			
Decimal separator used in this report	<input checked="" type="checkbox"/>	Comma (,)	<input type="checkbox"/> Point (.)

## ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
$U_N$	: Nominal voltage
$T_x$	: Transmitter
$R_x$	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

## DOCUMENT HISTORY

Report nr.	Date	Description
4388006.50	2022-05-25	First release.

## REMARKS AND COMMENTS

The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).

# 1 GENERAL INFORMATION

## 1.1 General Description of the Item(s)

Description of the item .....	LED lamp
Model / Type number .....	PHILIPS
Trademark .....	9290018216A, 9290018217A, 9290024692A, 9290024693A
Ratings .....	220-240 Vac, 50/60 Hz, 9290018216A, 9290018217A: 9 W; 9290024692A, 9290024693A: 9,5 W
Manufacturer/Factory .....	Signify (China) Investment Co., Ltd. Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai 200233, China

For Zigbee

Operating frequency range(s) – Tx :	2405-2480 MHz
Operating frequency range(s) – Rx :	2405-2480 MHz
Type of Modulation .....	GFSK
Antenna type.....	Integral Antenna
Antenna gain.....	-5,0 dBi
Number of channel.....	16
Operating Temperature Range.....	-20 - 45 °C

For BLE

Operating frequency range(s) – Tx :	2402-2480 MHz
Operating frequency range(s) – Rx :	2402-2480 MHz
Type of Modulation .....	GFSK
Data rate.....	1 Mbps, 2 Mbps, 125 kbps, 500 kbps
Antenna type.....	Integral Antenna
Antenna gain.....	-5,0 dBi
Number of channel.....	40
Operating Temperature Range.....	-20 - 45 °C

Rated power supply .....	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input checked="" type="checkbox"/>	AC: 220 – 240 V, 50/60 Hz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	DC: 12 V, 24 V, 12 / 24 V					
	<input type="checkbox"/>	Battery:					
Mounting position.....	<input type="checkbox"/>	Table top equipment					
	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input type="checkbox"/>	Other:					

**Intended use of the Equipment Under Test (EUT)**

The apparatus as supplied for the test is LED lamp which intended for residential use, the product contains electronic control circuitry but without earth connection and no component susceptible to magnetic fields.

According to manufacturer's declaration, all models are identical except different rated power and lamp cap.

Hence, model 9290024692A was chosen for full test and the corresponding test data are also representative of the other models as well.

**Copy of marking plate:**

No provide.

## 1.2 Test data

Test Location	DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
Date of receipt of test item	2022-04-18
Date (s) of performance of tests	2022-04-18 to 2022-04-28

## 1.3 The environment(s) in which the EUT is intended to be used

The equipment under test (EUT) is intended to be used in the following environment(s):

<input checked="" type="checkbox"/>	Residential (domestic) environment.
<input checked="" type="checkbox"/>	Commercial and light-industrial environment.
<input type="checkbox"/>	Industrial environment.

## 1.4 Classification of Receivers according to ETSI EN 300328

The receivers were subdivided into 3 categories according to ETSI EN 300 328. For each category, the specific immunity requirements are formulated.

	Receiver category	Definition
	1	Adaptive equipment with a maximum RF output power greater than 10 dBm(e.i.r.p).
√	2	Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm(e.i.r.p).
	3	Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm(e.i.r.p).

## 2 DESCRIPTION OF TEST SETUP

### 2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Operating mode	Operating mode description	Used for methods	
		Conducted	Radiated
1	Transmitting @BLE mode	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	Receiving @BLE mode	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3		<input type="checkbox"/>	<input type="checkbox"/>
Supplemental information: ---			

### 2.2 Support / Auxiliary equipment / unit / software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment / unit / software	Type / Version	Manufacturer	Supplied by
Laptop	Latitude 5488	DELL	DEKRA
Supplemental information: ---			

### 2.3 Test Configuration / Block diagram used for tests

Refer to Annex 3.

### 3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

#### 3.1 Standards

Standard	Year	Description
ETSI EN 300 328 V2.2.2	2019-07	Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum

#### 3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

#### 3.3 Overview of results

TRANSMITTER TESTS		
Requirement – Test case for Wide band modulation other than FHSS	Verdict	Remark
RF output power	PASS	---
Power Spectral Density	PASS	---
Duty Cycle, Tx-sequence, Tx-gap	N/A	See 1)
Medium Utilization (MU) factor	N/A	See 2)
Adaptivity	N/A	See 3)
Occupied Channel Bandwidth (BW)	PASS	---
Transmitter unwanted emissions in the out-of-band domain	PASS	---
Transmitter unwanted emissions in the spurious domain	PASS	---
<u>Supplementary information:</u>		
1) These requirements apply to non-adaptive equipment or to adaptive equipment when operating in a non-adaptive mode.		
2) This requirement does not apply to adaptive equipment unless operating in a non-adaptive mode.		
3) The maximum RF output power for this product is less than 10 dBm.		

RECEIVER TESTS		
Requirement	Verdict	Remark
Receiver spurious emission	PASS	--
Receiver Blocking	PASS	---
Geo-location capability	N/A	See 1)
<u>Supplementary information:</u>		
1) This requirement only applies to equipment with geo-location capability		

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.

### 3.4 Measurement procedure

The EUT was controlled by a serial PCB which provided by manufacturer which connected to laptop through the com port. After connected, run the software “HueApprobatonTool” supplied by manufacturer to control the EUT work in required test mode as below table.

Mode	Frequency (MHz)
BLE	2402
	2440
	2480

## 4 TRANSMITTER TEST RESULTS

<b>4.1 RF output power</b>	<b>VERDICT: PASS</b>
----------------------------	----------------------

Standard	ETSI EN 300 328
<p>Limits:                  For adaptive equipment using wide band modulation other than FHSS, the maximum RF output power shall be 20 dBm.</p> <p>The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.</p> <p>This limit shall apply for any combination of power level and intended antenna assembly.</p>	

### Performed measurements

Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

### Results for 1M

Temperature	Frequency (MHz)	Reading Level (dBm)	Antenna Gain (dBi)	RF output power (dBm)	Limit (dBm)
25 °C	2402	9,99	-5,00	4,99	20
	2440	10,15	-5,00	5,15	20
	2480	9,69	-5,00	4,69	20
-20 °C	2402	9,78	-5,00	4,78	20
	2440	10,02	-5,00	5,02	20
	2480	9,62	-5,00	4,62	20
45 °C	2402	9,83	-5,00	4,83	20
	2440	10,1	-5,00	5,10	20
	2480	9,67	-5,00	4,67	20

### Results for 2M

Temperature	Frequency (MHz)	Reading Level (dBm)	Antenna Gain (dBi)	RF output power (dBm)	Limit (dBm)
25 °C	2402	10,06	-5,00	5,06	20
	2440	10,12	-5,00	5,12	20
	2480	9,67	-5,00	4,67	20
-20 °C	2402	9,89	-5,00	4,89	20
	2440	9,98	-5,00	4,98	20
	2480	9,55	-5,00	4,55	20
45 °C	2402	9,95	-5,00	4,95	20
	2440	10,06	-5,00	5,06	20
	2480	9,59	-5,00	4,59	20

### Results for 125 kbps

Temperature	Frequency (MHz)	Reading Level (dBm)	Antenna Gain (dBi)	RF output power (dBm)	Limit (dBm)
25 °C	2402	10,02	-5,00	5,02	20
	2440	10,08	-5,00	5,08	20
	2480	9,62	-5,00	4,62	20
-20 °C	2402	9,83	-5,00	4,83	20
	2440	9,92	-5,00	4,92	20
	2480	9,52	-5,00	4,52	20
45 °C	2402	9,97	-5,00	4,97	20
	2440	9,99	-5,00	4,99	20
	2480	9,59	-5,00	4,59	20

### Results for 500 kbps

Temperature	Frequency (MHz)	Reading Level (dBm)	Antenna Gain (dBi)	RF output power (dBm)	Limit (dBm)
25 °C	2402	10,02	-5,00	5,02	20
	2440	10,08	-5,00	5,08	20
	2480	9,63	-5,00	4,63	20
-20 °C	2402	9,81	-5,00	4,81	20
	2440	9,86	-5,00	4,86	20
	2480	9,52	-5,00	4,52	20
45 °C	2402	9,92	-5,00	4,92	20
	2440	9,97	-5,00	4,97	20
	2480	9,54	-5,00	4,54	20

<b>4.2 Power Spectral Density</b>	<b>VERDICT: PASS</b>
-----------------------------------	----------------------

Standard	ETSI EN 300 328
Limits: For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.	

**Performed measurements**

Port under test	Antenna port
Test method applied	<input checked="" type="checkbox"/> Conducted measurement
	<input type="checkbox"/> Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).
Operating mode(s) used	Mode 1
Remark	---

**Results for 1M**

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/ MHz)
2402	4,941	10
2440	5,105	
2480	4,645	

**Results for 2M**

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/ MHz)
2402	3,913	10
2440	3,965	
2480	3,520	

**Results for 125 kbps**

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/ MHz)
2402	4,931	10
2440	4,987	
2480	4,531	

**Results for 500 kbps**

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/ MHz)
2402	4,936	10
2440	4,999	
2480	4,544	

<b>4.3 Occupied Channel Bandwidth</b>	<b>VERDICT: PASS</b>
---------------------------------------	----------------------

Standard	ETSI EN 300 328
Limits: The Occupied Channel Bandwidth shall fall completely within the band given in Clause 1 (2,4 GHz to 2,4835 GHz).	
In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.	

**Performed measurements**

Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

**Results for 1M**

Frequency (MHz)	Bandwidth 99%(MHz)	FL (MHz) or FH (MHz)	Lower Limit (MHz)	Higher Limit
2402	1,034	2401,462	> 2400,0	N/A
2480	1,034	2480,497	N/A	< 2483,5

**Results for 2M**

Frequency (MHz)	Bandwidth 99%(MHz)	FL (MHz) or FH (MHz)	Lower Limit (MHz)	Higher Limit
2402	2,086	2400,931	> 2400,0	N/A
2480	2,111	2481,043	N/A	< 2483,5


**Results for 125 kbps**

Frequency (MHz)	Bandwidth 99%(MHz)	FL (MHz) or FH (MHz)	Lower Limit (MHz)	Higher Limit
2402	1,094	2401,432	> 2400,0	N/A
2480	1,084	2480,517	N/A	< 2483,5


### Results for 500 kbps

Frequency (MHz)	Bandwidth 99%(MHz)	FL (MHz) or FH (MHz)	Lower Limit (MHz)	Higher Limit
2402	1,104	2401,422	> 2400,0	N/A
2480	1,094	2480,517	N/A	< 2483,5


Test figure for 1M  
Channel 2402 MHz

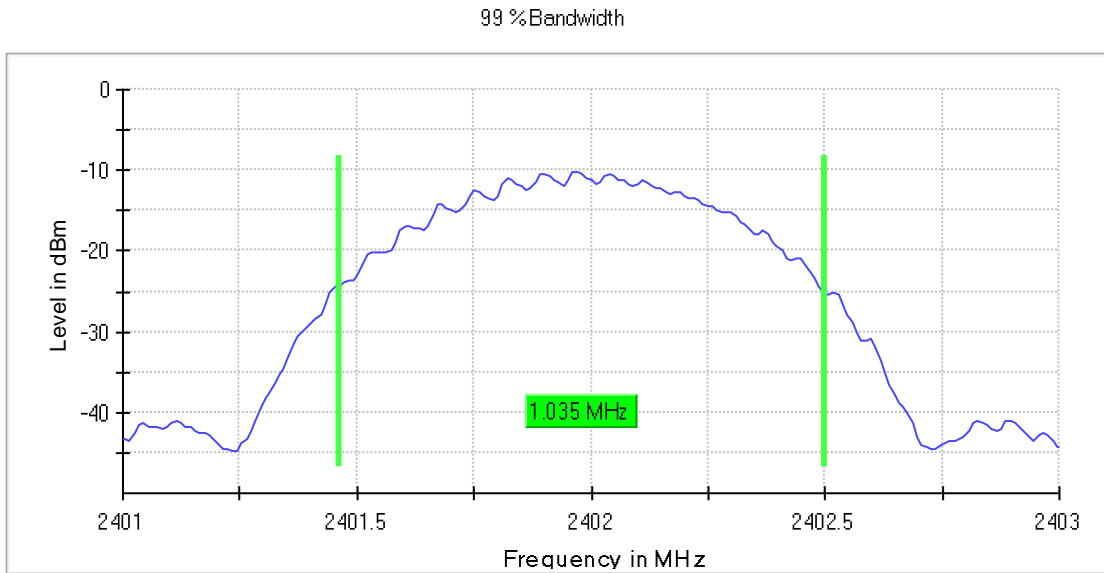


Channel 2480 MHz

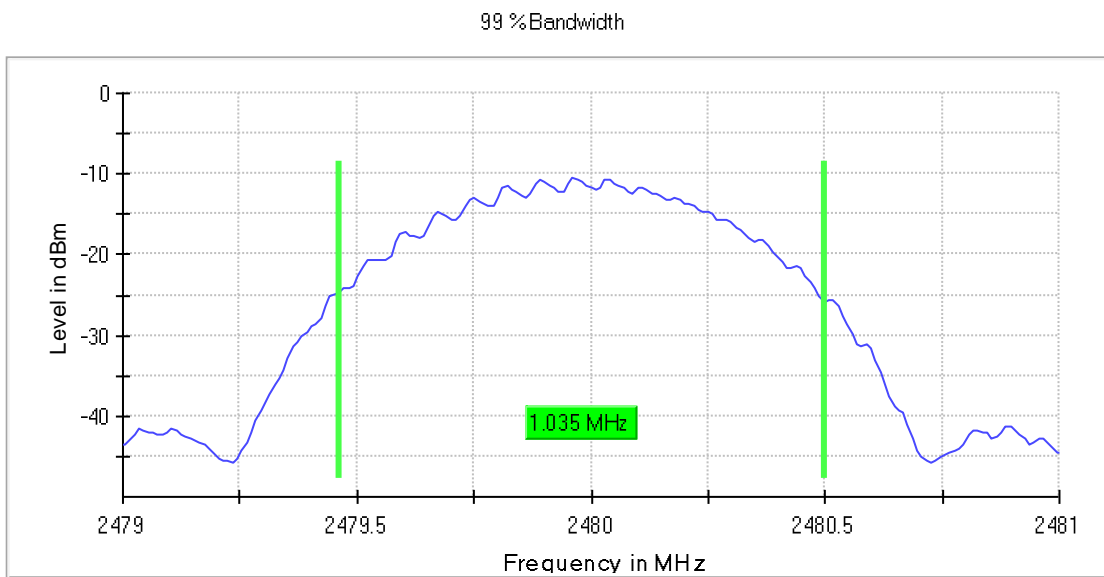


Test figure for 2M  
Channel 2402 MHz

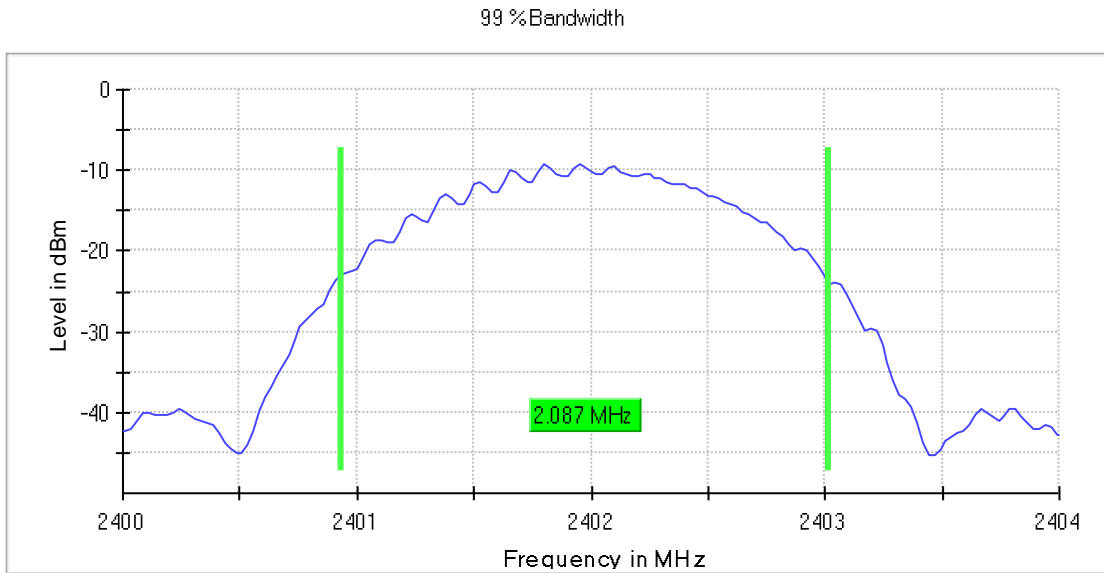


Channel 2480 MHz

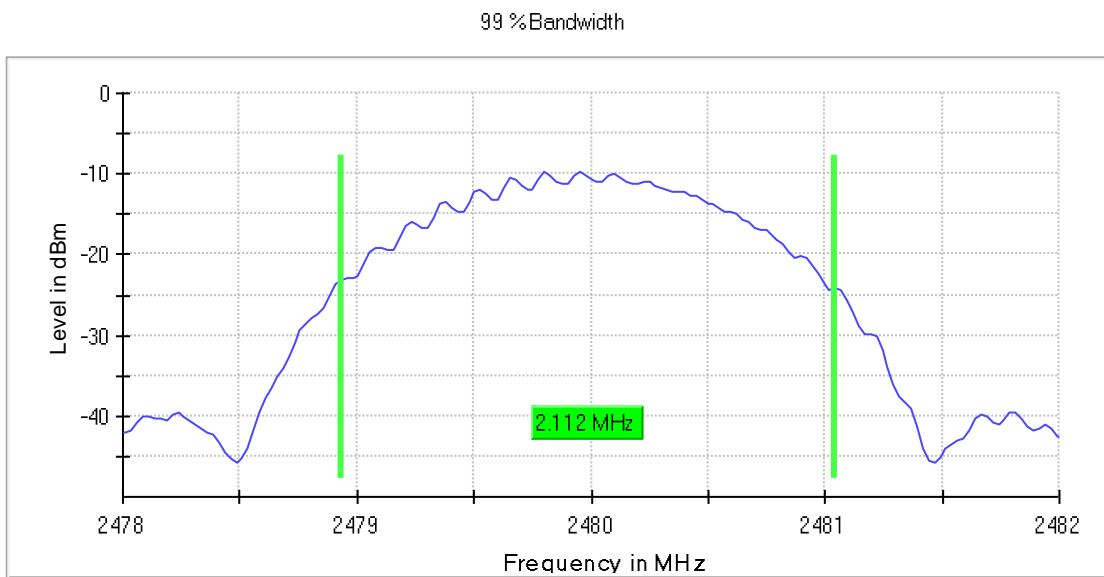


Test figure for 125 kbps  
Channel 2402 MHz

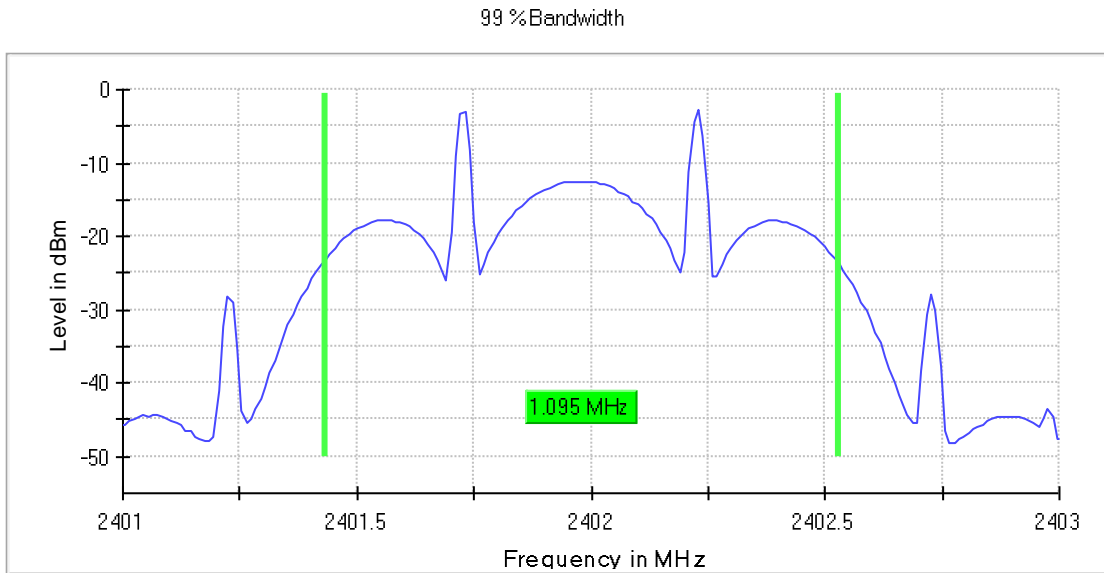


Channel 2480 MHz

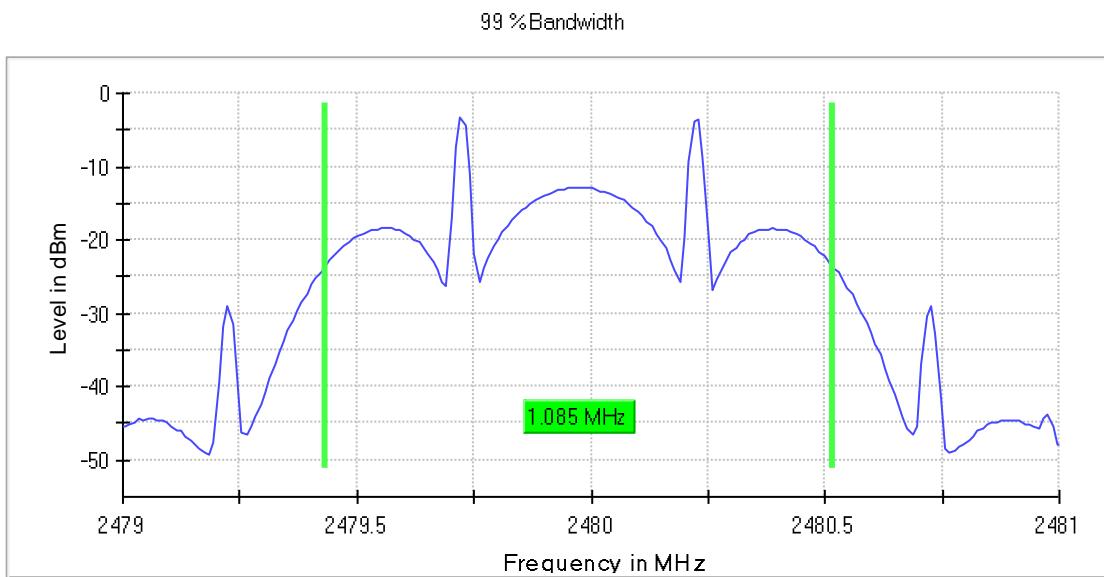


Test figure for 500 kbps  
Channel 2402 MHz

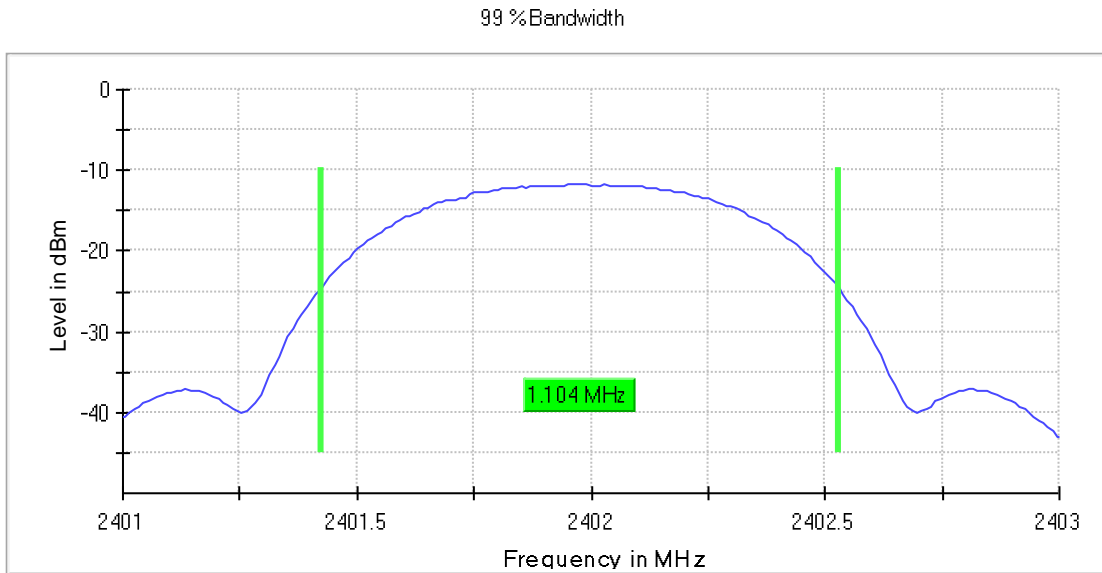

Channel 2480 MHz

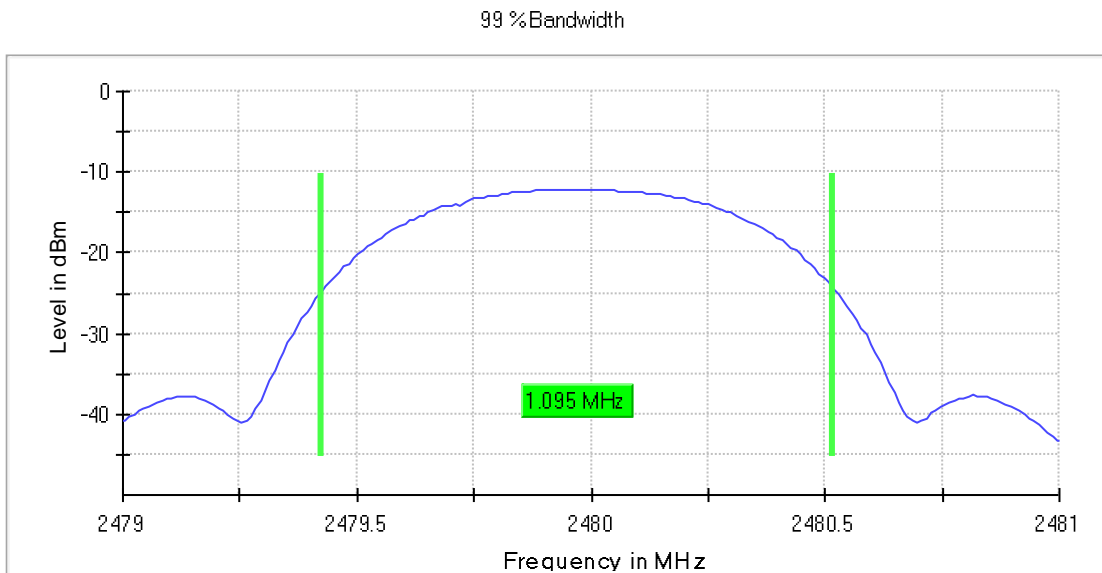

4.4	<b>Transmitter unwanted emissions in the out-of-band domain</b>	<b>VERDICT: PASS</b>
-----	---	----------------------

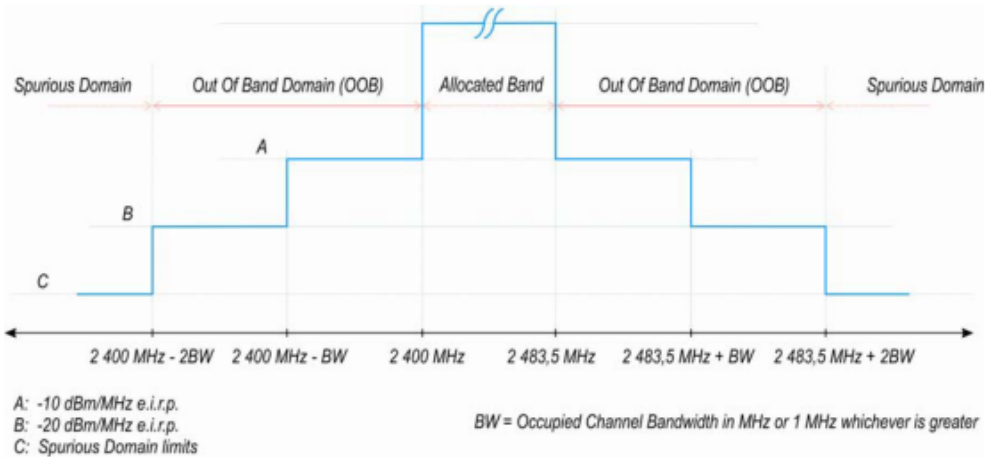Standard	ETSI EN 300 328
Limits:	
<p>The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.</p> <p>NOTE: Within the 2 400 MHz to 2 483,5 MHz band, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 4.3.2.6.</p>	
 <p style="text-align: center;"> <math>2\ 400\ \text{MHz} - 2\text{BW}</math>   <math>2\ 400\ \text{MHz} - \text{BW}</math>   <math>2\ 400\ \text{MHz}</math>   <math>2\ 483,5\ \text{MHz}</math>   <math>2\ 483,5\ \text{MHz} + \text{BW}</math>   <math>2\ 483,5\ \text{MHz} + 2\text{BW}</math> </p> <p>             A: -10 dBm/MHz e.i.r.p.              B: -20 dBm/MHz e.i.r.p.              C: Spurious Domain limits         </p> <p style="text-align: right;">BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater</p>	
<b>Figure 3: Transmit mask</b>	

**Performed measurements**

Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

**Results for 1M at 2402 MHz**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2398.430350	-49.8	-20.0	PASS
2398.465175	-49.8	-20.0	PASS
2399.465175	-46.0	-10.0	PASS
2399.500000	-45.8	-10.0	PASS
2484.000000	-61.0	-10.0	PASS
2484.034825	-61.1	-10.0	PASS
2485.034825	-61.0	-20.0	PASS
2485.069650	-61.1	-20.0	PASS

**Results for 1M at 2480 MHz**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2398.430350	-61.0	-20.0	PASS
2398.465175	-61.0	-20.0	PASS
2399.465175	-61.0	-10.0	PASS
2399.500000	-61.0	-10.0	PASS
2484.000000	-51.4	-10.0	PASS
2484.034825	-51.5	-10.0	PASS
2485.034825	-53.6	-20.0	PASS
2485.069650	-53.6	-20.0	PASS

### Results for 2M at 2402 MHz

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2396.326086	-52.5	-20.0	PASS
2396.413043	-52.3	-20.0	PASS
2397.413043	-49.7	-20.0	PASS
2398.413043	-46.7	-10.0	PASS
2398.500000	-46.3	-10.0	PASS
2399.500000	-31.5	-10.0	PASS
2484.000000	-61.0	-10.0	PASS
2485.000000	-61.0	-10.0	PASS
2485.086957	-61.0	-10.0	PASS
2486.086957	-61.0	-20.0	PASS
2487.086957	-61.1	-20.0	PASS
2487.173914	-61.0	-20.0	PASS

### Results for 2M at 2480 MHz

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2396.276398	-61.0	-20.0	PASS
2396.388199	-61.0	-20.0	PASS
2397.388199	-61.0	-20.0	PASS
2398.388199	-61.0	-10.0	PASS
2398.500000	-61.0	-10.0	PASS
2399.500000	-61.0	-10.0	PASS
2484.000000	-48.2	-10.0	PASS
2485.000000	-50.3	-10.0	PASS
2485.111801	-50.6	-10.0	PASS
2486.111801	-52.9	-20.0	PASS
2487.111801	-54.4	-20.0	PASS
2487.223602	-54.5	-20.0	PASS

**Results for 125 kbps at 2402 MHz**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2398.310946	-50.1	-20.0	PASS
2398.405473	-49.9	-20.0	PASS
2399.405473	-46.6	-10.0	PASS
2399.500000	-46.3	-10.0	PASS
2484.000000	-61.0	-10.0	PASS
2484.094527	-61.1	-10.0	PASS
2485.094527	-61.1	-20.0	PASS
2485.189054	-61.0	-20.0	PASS

**Results for 125 kbps at 2480 MHz**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2398.330846	-60.9	-20.0	PASS
2398.415423	-61.0	-20.0	PASS
2399.415423	-61.0	-10.0	PASS
2399.500000	-60.9	-10.0	PASS
2484.000000	-51.4	-10.0	PASS
2484.084577	-51.6	-10.0	PASS
2485.084577	-53.5	-20.0	PASS
2485.169154	-53.2	-20.0	PASS

**Results for 500 kbps at 2402 MHz**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2398.291046	-50.0	-20.0	PASS
2398.395523	-49.8	-20.0	PASS
2399.395523	-46.6	-10.0	PASS
2399.500000	-46.1	-10.0	PASS
2484.000000	-61.0	-10.0	PASS
2484.104477	-61.0	-10.0	PASS
2485.104477	-61.0	-20.0	PASS
2485.208954	-61.0	-20.0	PASS

**Results for 500 kbps at 2480 MHz**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2398.310946	-61.0	-20.0	PASS
2398.405473	-61.0	-20.0	PASS
2399.405473	-61.0	-10.0	PASS
2399.500000	-61.0	-10.0	PASS
2484.000000	-51.5	-10.0	PASS
2484.094527	-51.7	-10.0	PASS
2485.094527	-53.5	-20.0	PASS
2485.189054	-53.4	-20.0	PASS

<b>4.5</b>	<b>Transmitter unwanted emissions in the spurious domain</b>	<b>VERDICT: PASS</b>
------------	--	----------------------

Standard	ETSI EN 300 328	
Limits:		
<b>Frequency range</b>	<b>Maximum power e.r.p. (<math>\leq 1</math> GHz) e.i.r.p. (<math>&gt; 1</math> GHz)</b>	<b>Bandwidth</b>
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

**Performed measurements**

Port under test	Enclosure port	
Test method applied	<input type="checkbox"/>	Conducted measurement
	<input checked="" type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1 (1M) worst case	
Remark	---	

**Results**

Channel (MHz)	Polarity	Frequency (MHz)	Result (dBm)	Limit (dBm)	Verdict
2402	H	7212,00	-43,84	-30,00	PASS
	V	4801,00	-45,70	-30,00	PASS
		7212,00	-41,44	-30,00	PASS
2480	H	7433,00	-44,18	-30,00	PASS
	V	4960,00	-49,88	-30,00	PASS
		7433,00	-40,41	-30,00	PASS

## 5 RECEIVER TEST RESULTS

5.1 Receiver spurious emissions	VERDICT: PASS
---------------------------------	---------------

Standard	ETSI EN 300 328	
Limits:		
<b>Frequency range</b>	<b>Maximum power e.r.p. (<math>\leq 1</math> GHz) e.i.r.p. (<math>&gt; 1</math> GHz)</b>	<b>Measurement bandwidth</b>
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz

### Performed measurements

Port under test	Enclosure port	
Test method applied	<input type="checkbox"/>	Conducted measurement
	<input checked="" type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 2	
Remark	---	

### Results

Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBm)	Attenuation (dB)	Result (dBm)	Limit (dBm)	Verdict
2402	H	No significant emissions were measured at the frequency range of interest employing the PK detectors (more than 20 dB below limits).					PASS
	V					PASS	
2480	H	No significant emissions were measured at the frequency range of interest employing the PK detectors (more than 20 dB below limits).					PASS
	V					PASS	

<b>5.2 Receiver Blocking</b>	<b>VERDICT: PASS</b>
------------------------------	----------------------

Standard	ETSI EN 300 328								
Limits:									
<p><b>Table 15: Receiver Blocking parameters receiver Category 2 equipment</b></p> <table border="1" style="width: 100%; border-collapse: collapse; margin: 10px auto;"> <thead> <tr> <th style="width: 45%;">Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</th> <th style="width: 15%;">Blocking signal frequency (MHz)</th> <th style="width: 20%;">Blocking signal power (dBm) (see note 3)</th> <th style="width: 20%;">Type of blocking signal</th> </tr> </thead> <tbody> <tr> <td style="padding: 5px;">(-139 dBm + 10 × log<sub>10</sub>(OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)</td> <td style="padding: 5px;">2 380 2 504 2 300 2 584</td> <td style="padding: 5px; text-align: center;">-34</td> <td style="padding: 5px; text-align: center;">CW</td> </tr> </tbody> </table> <p>NOTE 1: OCBW is in Hz.                  NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 26 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.                  NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>		Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal						
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW						

**Performed measurements**

Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 2	
Remark	---	

## Results


Test Channel	Freq [MHz]	Wanted Signal Level [dBm]	CW Level [dBm]	PER [%]	Limit [%]	Verdict
2402	2380.000000	-69	-34	0.01	<=10	PASS
2402	2300.000000	-69	-34	0.02	<=10	PASS
2480	2504.000000	-69	-34	0.01	<=10	PASS
2480	2584.000000	-69	-34	0.01	<=10	PASS

## 6 IDENTIFICATION OF THE EQUIPMENT UNDER TEST



The photographs show the tested device.




Model 9290024692A

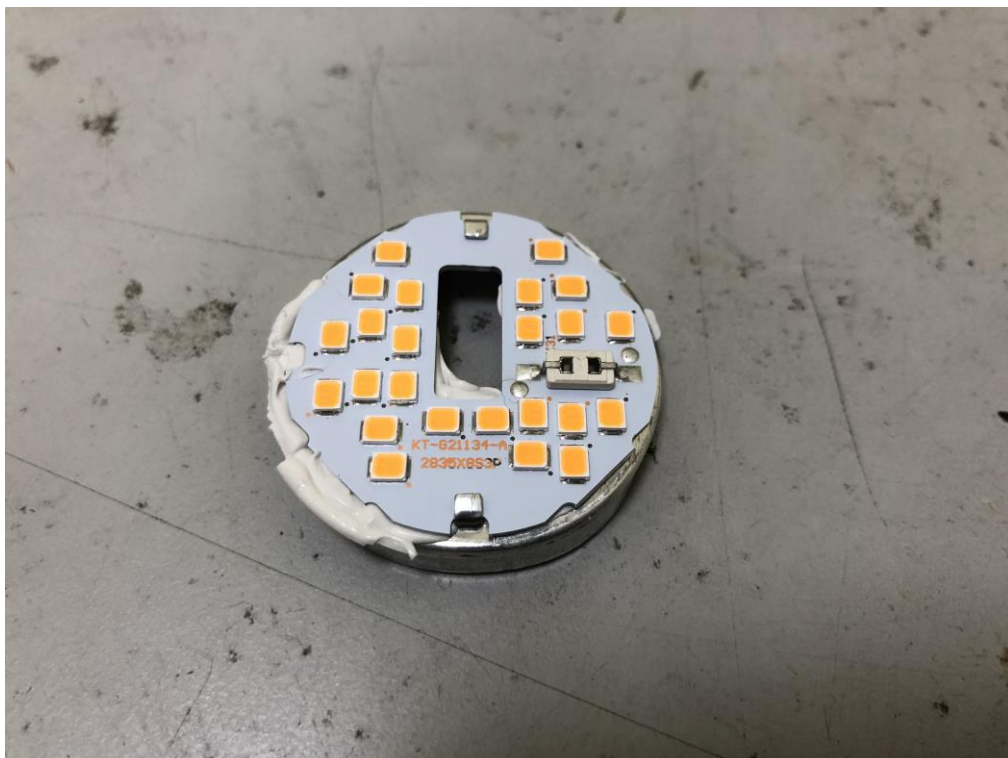

LED module

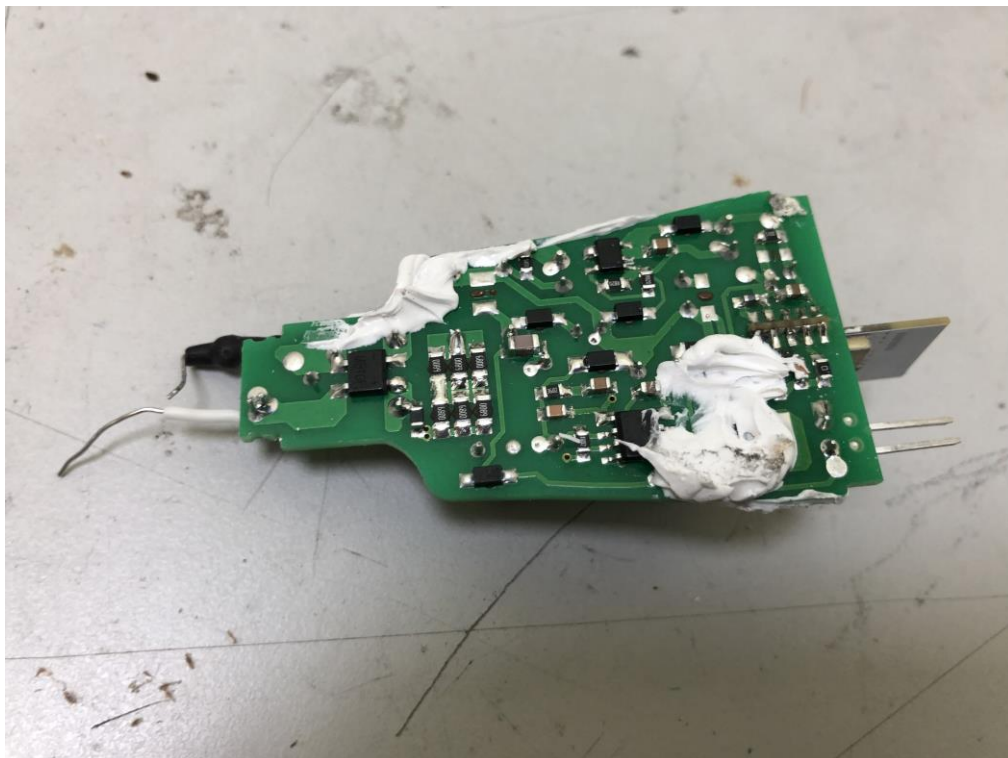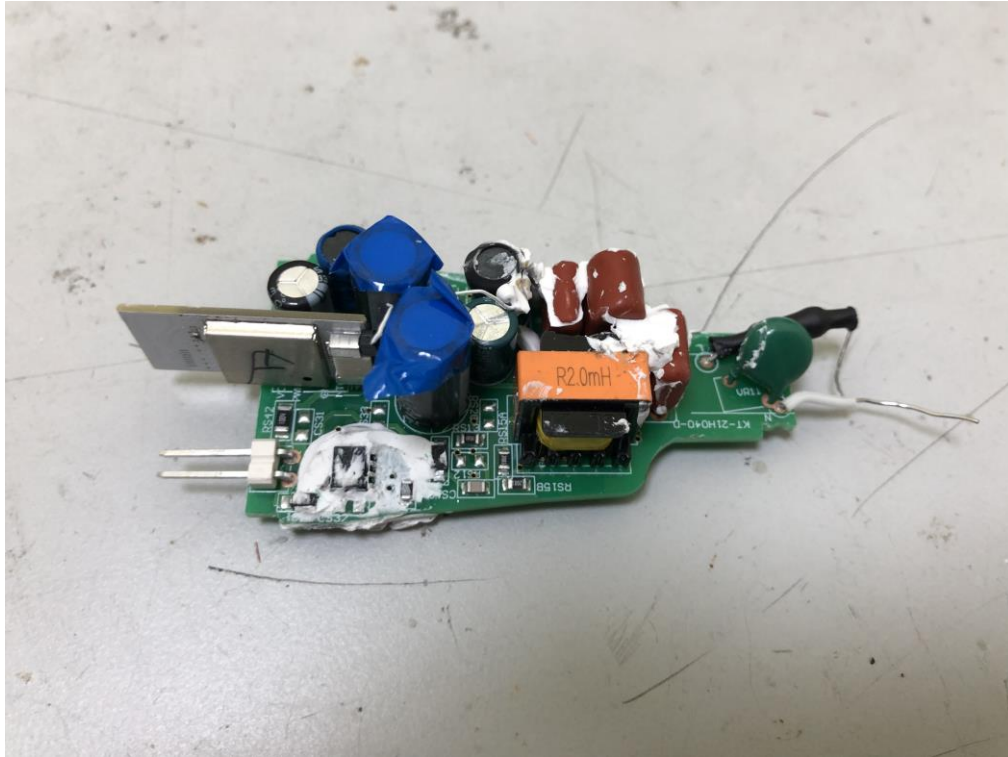

Power PCB

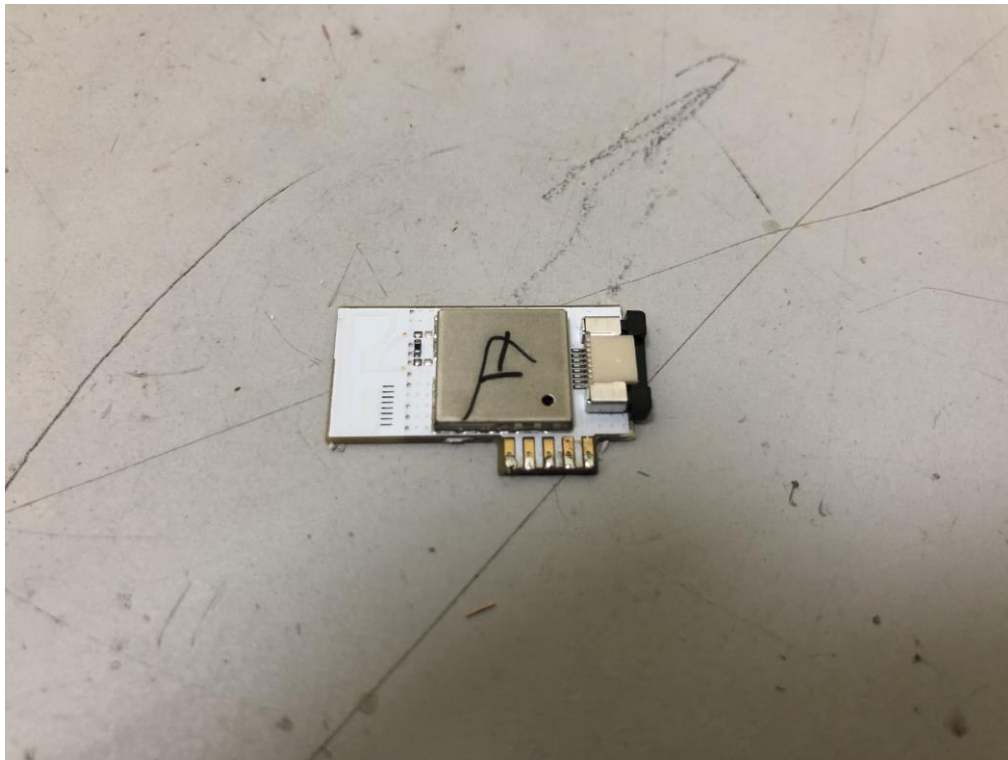

RF module

## ANNEX 1 – MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Occupied Channel Bandwidth	±0,7%
RF Output power, conducted	±0,6dB
Power Spectral Density, Conducted	±0,6dB
Unwanted Emissions, Conducted	±0.7dB
Spurious (30-1000MHz)	±4,4dB
Spurious (1-12,75GHz)	±4,4dB

## ANNEX 2 - USED EQUIPMENT


Item	Instrumentation	Manufacturer	Model	Serial no.	DEKRA No.	Cal Due date
1	EMI receiver	R&S	ESCI	101205	G/L857	2022/07/21
2	Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	506	G/L864	2022/10/26
3	Antenna (1GHz-18GHz)	R&S	HF907	102306	G/L1236	2023/02/14
4	Horn antenna preamplifier	Schwarzbeek	SCU-18	102234	G/L1236-1	2023/02/14
5	Spectrum analyzer	R&S	FSV	SN101012	G/L1235	2023/01/17
6	Chamber	ETS	/	/	G/L856	2024/06/10
7	OSP	R&S	OSP 150	101907	GZ1894	2023/04/27
8	Signal generator	R&S	SMB 100A	181317	GZ1895	2023/04/27
9	Vector signal generator	R&S	SMBV100A	263671	GZ1896	2023/04/27
10	Wireless connectivity tester	R&S	CMW 270	100990	GZ1893	2022/04/27
11	Programmable Temperature & Humidity Chamber	ESPEC	EL-10KA	08107561	G/L466	2022/10/12

## ANNEX 3 - TEST PHOTOS

Radiated measurements



### Conducted measurements

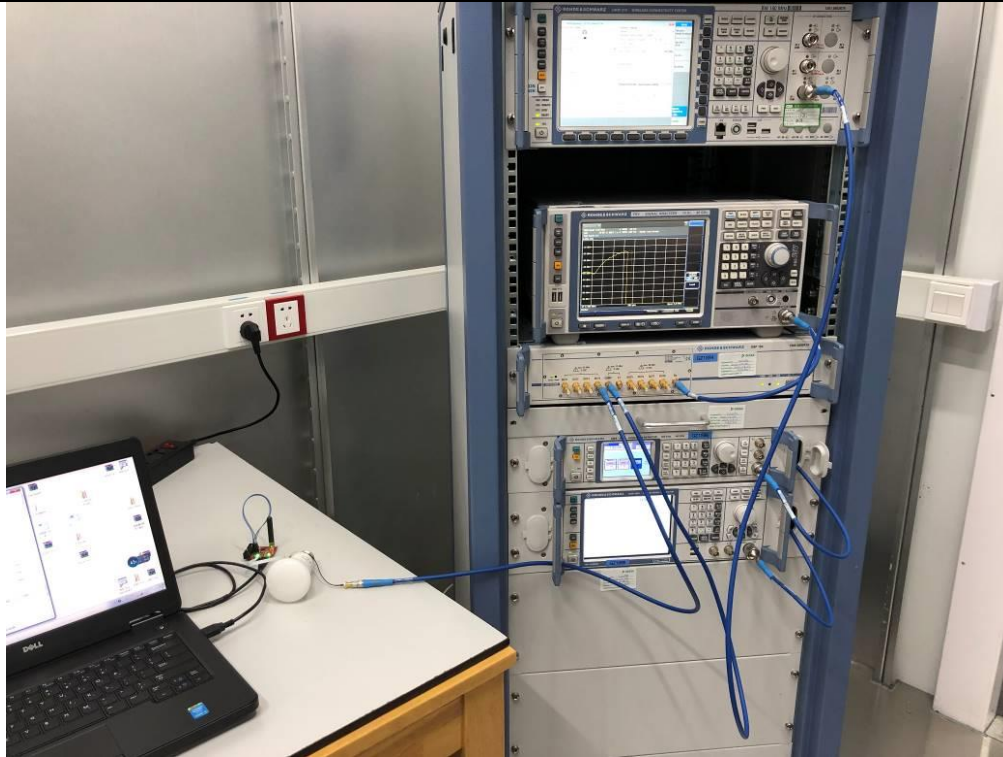

Normal temperature



Extreme temperature

--- END ---

Test report No: 4388006.51

## TEST REPORT

### Radio Spectrum Matters (RF)

Identification of item tested	LED lamp
Trademark	PHILIPS
Model and /or type reference	9290018216A, 9290018217A, 9290024692A, 9290024693A
Features	220-240 Vac, 50/60 Hz, 9 / 9,5 W
Applicant's name / address	Signify (China) Investment Co., Ltd. Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai 200233, China
Test method requested, standard	ETSI EN 300 328 V2.2.2 (2019-07)
Verdict Summary	COMPLIANCE
Tested by (name & signature)	Harry Deng 
Approved by (name & signature)	Tim Yan 
Date of issue	2022-05-25
Report template No	TRF_EMCC 2017-06-328

## INDEX

---

	<b>page</b>
General conditions .....	4
Uncertainty .....	4
Environmental conditions .....	4
Possible test case verdicts .....	4
Definition of symbols used in this test report.....	5
Abbreviations .....	5
Document History .....	5
Remarks and Comments .....	5
1 General Information .....	6
1.1 General Description of the Item(s) .....	6
1.2 Test data.....	8
1.3 The environment(s) in which the EUT is intended to be used .....	8
1.4 Classification of Receivers according to ETSI EN 300328.....	8
2 Description of Test Setup .....	9
2.1 Operating mode(s) used for tests .....	9
2.2 Support / Auxiliary equipment / unit / software for the EUT .....	9
2.3 Test Configuration / Block diagram used for tests .....	9
3 Verdict summary section .....	10
3.1 Standards .....	10
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	10
3.3 Overview of results.....	10
3.4 Measurement procedure .....	11
4 Transmitter Test Results .....	12
4.1 RF output power.....	12
4.2 Power Spectral Density .....	13
4.3 Occupied Channel Bandwidth .....	14
4.4 Transmitter unwanted emissions in the out-of-band domain.....	16
4.5 Transmitter unwanted emissions in the spurious domain .....	18
5 Receiver Test Results .....	19
5.1 Receiver spurious emissions .....	19
5.2 Receiver Blocking .....	20
6 Identification of the Equipment Under Test .....	22
Annex 1 – Measurement Uncertainty.....	25
Annex 2 - Used Equipment .....	26

Annex 3 - Test Photos..... 27

## GENERAL CONDITIONS

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.
5. This report will not be used for social proof function in China market.

## UNCERTAINTY

---

For all measurements where guidance for the calculation of the instrumentation uncertainty of a measurement is specified in EN 55016-4-2 (CISPR 16-4-2), EN/IEC 61000-4 series or a product standard, the measurement instrumentation uncertainty has been calculated and applied in accordance with these standards.

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

## ENVIRONMENTAL CONDITIONS

---

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa – 106 kPa

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

## POSSIBLE TEST CASE VERDICTS

---

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

## DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report/test/EUT.			
<input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report/test/EUT.			
Decimal separator used in this report	<input checked="" type="checkbox"/>	Comma (,)	<input type="checkbox"/> Point (.)

## ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
$U_N$	: Nominal voltage
$T_x$	: Transmitter
$R_x$	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

## DOCUMENT HISTORY

Report nr.	Date	Description
4388006.51	2022-05-25	First release.

## REMARKS AND COMMENTS

The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).

# 1 GENERAL INFORMATION

## 1.1 General Description of the Item(s)

Description of the item .....	LED lamp
Model / Type number .....	PHILIPS
Trademark .....	9290018216A, 9290018217A, 9290024692A, 9290024693A
Ratings .....	220-240 Vac, 50/60 Hz, 9290018216A, 9290018217A: 9 W; 9290024692A, 9290024693A: 9,5 W
Manufacturer/Factory .....	Signify (China) Investment Co., Ltd. Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai 200233, China

For Zigbee

Operating frequency range(s) – Tx :	2405-2480 MHz
Operating frequency range(s) – Rx :	2405-2480 MHz
Type of Modulation .....	GFSK
Antenna type.....	Integral Antenna
Antenna gain.....	-5,0 dBi
Number of channel.....	16
Operating Temperature Range.....	-20 - 45 °C

For BLE

Operating frequency range(s) – Tx :	2402-2480 MHz
Operating frequency range(s) – Rx :	2402-2480 MHz
Type of Modulation .....	GFSK
Data rate.....	1 Mbps, 2 Mbps, 125 kbps, 500 kbps
Antenna type.....	Integral Antenna
Antenna gain.....	-5,0 dBi
Number of channel.....	40
Operating Temperature Range.....	-20 - 45 °C

Rated power supply .....	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input checked="" type="checkbox"/>	AC: 220 – 240 V, 50/60 Hz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	DC: 12 V, 24 V, 12 / 24 V					
	<input type="checkbox"/>	Battery:					
Mounting position.....	<input type="checkbox"/>	Table top equipment					
	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
	<input type="checkbox"/>	Other:					

**Intended use of the Equipment Under Test (EUT)**

The apparatus as supplied for the test is LED lamp which intended for residential use, the product contains electronic control circuitry but without earth connection and no component susceptible to magnetic fields.

According to manufacturer's declaration, all models are identical except different rated power and lamp cap.

Hence, model 9290024692A was chosen for full test and the corresponding test data are also representative of the other models as well.

**Copy of marking plate:**

No provide.

## 1.2 Test data

Test Location	DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch Block 5, No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
Date of receipt of test item	2022-04-18
Date (s) of performance of tests	2022-04-18 to 2022-04-28

## 1.3 The environment(s) in which the EUT is intended to be used

The equipment under test (EUT) is intended to be used in the following environment(s):

<input checked="" type="checkbox"/>	Residential (domestic) environment.
<input checked="" type="checkbox"/>	Commercial and light-industrial environment.
<input type="checkbox"/>	Industrial environment.

## 1.4 Classification of Receivers according to ETSI EN 300328

The receivers were subdivided into 3 categories according to ETSI EN 300 328. For each category, the specific immunity requirements are formulated.

	Receiver category	Definition
	1	Adaptive equipment with a maximum RF output power greater than 10 dBm(e.i.r.p).
√	2	Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm(e.i.r.p).
	3	Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm(e.i.r.p).

## 2 DESCRIPTION OF TEST SETUP

### 2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Operating mode	Operating mode description	Used for methods	
		Conducted	Radiated
1	Transmitting @Zigbee mode	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	Receiving @Zigbee mode	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3		<input type="checkbox"/>	<input type="checkbox"/>
Supplemental information: ---			

### 2.2 Support / Auxiliary equipment / unit / software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment / unit / software	Type / Version	Manufacturer	Supplied by
Laptop	Latitude 5488	DELL	DEKRA
Supplemental information: ---			

### 2.3 Test Configuration / Block diagram used for tests

Refer to Annex 3.

### 3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

#### 3.1 Standards

Standard	Year	Description
ETSI EN 300 328 V2.2.2	2019-07	Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum

#### 3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

#### 3.3 Overview of results

TRANSMITTER TESTS		
Requirement – Test case for Wide band modulation other than FHSS	Verdict	Remark
RF output power	PASS	---
Power Spectral Density	PASS	---
Duty Cycle, Tx-sequence, Tx-gap	N/A	See 1)
Medium Utilization (MU) factor	N/A	See 2)
Adaptivity	N/A	See 3)
Occupied Channel Bandwidth (BW)	PASS	---
Transmitter unwanted emissions in the out-of-band domain	PASS	---
Transmitter unwanted emissions in the spurious domain	PASS	---
<u>Supplementary information:</u>		
1) These requirements apply to non-adaptive equipment or to adaptive equipment when operating in a non-adaptive mode.		
2) This requirement does not apply to adaptive equipment unless operating in a non-adaptive mode.		
3) The maximum RF output power for this product is less than 10 dBm.		

RECEIVER TESTS		
Requirement	Verdict	Remark
Receiver spurious emission	PASS	--
Receiver Blocking	PASS	---
Geo-location capability	N/A	See 1)
<u>Supplementary information:</u>		
1) This requirement only applies to equipment with geo-location capability		

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.

### 3.4 Measurement procedure

The EUT was controlled by a serial PCB which provided by manufacturer which connected to laptop through the com port. After connected, run the software “HueApprobatonTool” supplied by manufacturer to control the EUT work in required test mode as below table.

Mode	Frequency (MHz)
Zigbee	2405
	2440
	2480

## 4 TRANSMITTER TEST RESULTS

<b>4.1 RF output power</b>	<b>VERDICT: PASS</b>
----------------------------	----------------------

Standard	ETSI EN 300 328
<p>Limits:                  For adaptive equipment using wide band modulation other than FHSS, the maximum RF output power shall be 20 dBm.</p> <p>The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.</p> <p>This limit shall apply for any combination of power level and intended antenna assembly.</p>	

### Performed measurements

Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	

### Results

Temperature	Frequency (MHz)	Reading Level (dBm)	Antenna Gain (dBi)	RF output power (dBm)	Limit (dBm)
25 °C	2405	10,00	-5,00	5,00	20
	2440	10,07	-5,00	5,07	20
	2480	9,62	-5,00	4,62	20
-20 °C	2405	9,83	-5,00	4,83	20
	2440	9,93	-5,00	4,93	20
	2480	9,53	-5,00	4,53	20
45 °C	2405	9,93	-5,00	4,93	20
	2440	9,96	-5,00	4,96	20
	2480	9,59	-5,00	4,59	20

<b>4.2 Power Spectral Density</b>	<b>VERDICT: PASS</b>
-----------------------------------	----------------------

Standard	ETSI EN 300 328
Limits: For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.	

**Performed measurements**

Port under test	Antenna port
Test method applied	<input checked="" type="checkbox"/> Conducted measurement
	<input type="checkbox"/> Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).
Operating mode(s) used	Mode 1
Remark	---

**Results**

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/ MHz)
2405	3,029	10
2440	3,093	
2480	2,629	

<b>4.3 Occupied Channel Bandwidth</b>	<b>VERDICT: PASS</b>
---------------------------------------	----------------------

Standard	ETSI EN 300 328
<p>Limits:                  The Occupied Channel Bandwidth shall fall completely within the band given in Clause 1 (2,4 GHz to 2,4835 GHz).</p> <p>In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.</p>	


**Performed measurements**

Port under test	Antenna port	
Test method applied	<input checked="" type="checkbox"/>	Conducted measurement
	<input type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1	
Remark	---	


**Results**

Frequency (MHz)	Bandwidth 99%(MHz)	FL (MHz) or FH (MHz)	Lower Limit (MHz)	Higher Limit
2405	2,21	2403,857	> 2400,0	N/A
2480	2,23	2481,093	N/A	< 2483,5


Test figure  
Channel 2405 MHz

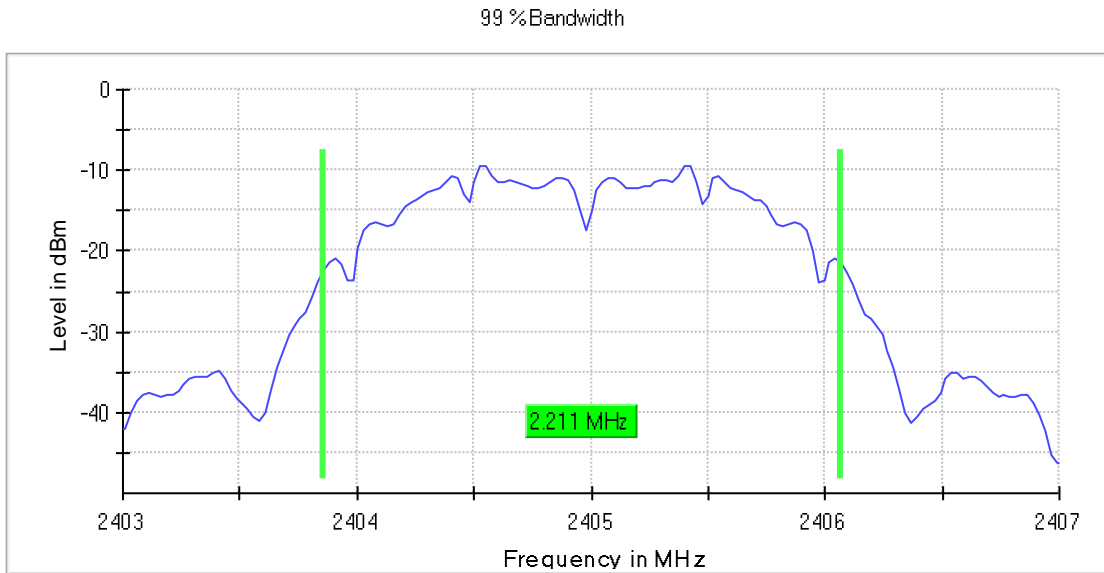

Channel 2480 MHz

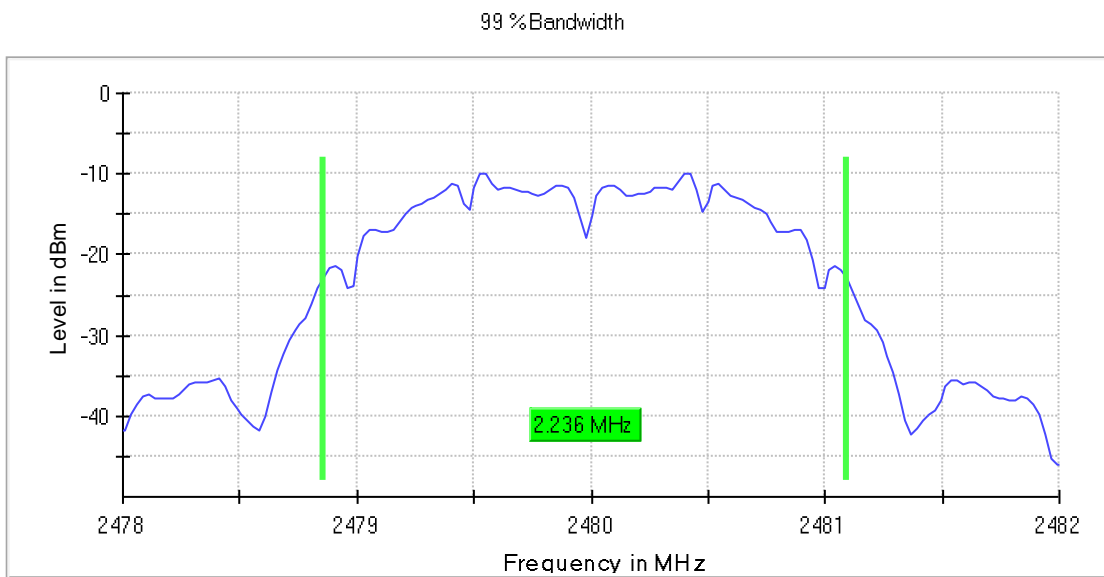

4.4	<b>Transmitter unwanted emissions in the out-of-band domain</b>	<b>VERDICT: PASS</b>
-----	---	----------------------

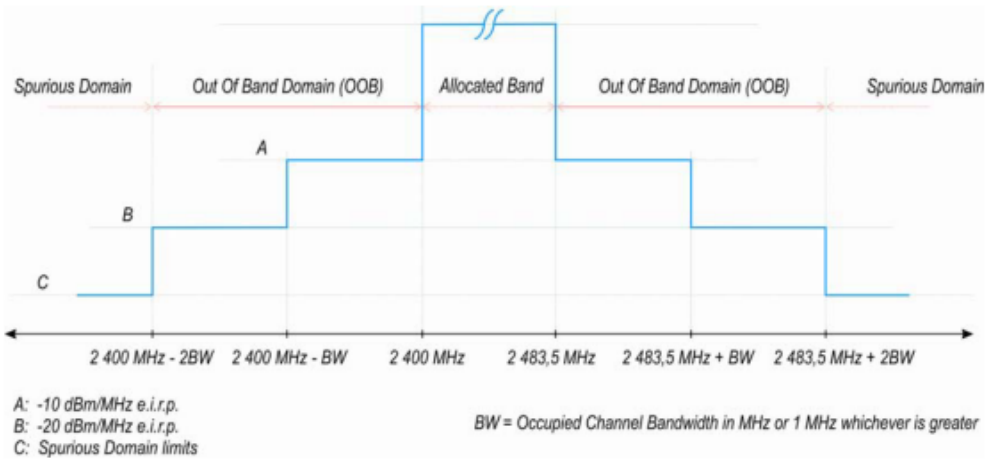Standard	ETSI EN 300 328
Limits:	
<p>The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.</p> <p>NOTE: Within the 2 400 MHz to 2 483,5 MHz band, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 4.3.2.6.</p>	
 <p style="text-align: center;"> <i>A: -10 dBm/MHz e.i.r.p.</i>  <i>B: -20 dBm/MHz e.i.r.p.</i>  <i>C: Spurious Domain limits</i> </p> <p style="text-align: center;"><i>BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater</i></p>	
<b>Figure 3: Transmit mask</b>	

**Performed measurements**

Port under test	Antenna port
Test method applied	<input checked="" type="checkbox"/> Conducted measurement
	<input type="checkbox"/> Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).
Operating mode(s) used	Mode 1
Remark	---

### Results for 2402 MHz

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2396.077640	-56.8	-20.0	PASS
2396.288820	-56.8	-20.0	PASS
2397.288820	-55.6	-20.0	PASS
2398.288820	-54.2	-10.0	PASS
2398.500000	-53.8	-10.0	PASS
2399.500000	-51.2	-10.0	PASS
2484.000000	-61.0	-10.0	PASS
2485.000000	-61.0	-10.0	PASS
2485.211180	-61.0	-10.0	PASS
2486.211180	-61.0	-20.0	PASS
2487.211180	-61.0	-20.0	PASS
2487.422360	-61.0	-20.0	PASS

### Results for 2480 MHz

Frequency (MHz)	Level (dBm)	Limit (dBm)	Result
2396.027950	-61.0	-20.0	PASS
2396.263975	-61.0	-20.0	PASS
2397.263975	-61.0	-20.0	PASS
2398.263975	-61.0	-10.0	PASS
2398.500000	-61.0	-10.0	PASS
2399.500000	-60.9	-10.0	PASS
2484.000000	-47.4	-10.0	PASS
2485.000000	-50.2	-10.0	PASS
2485.236025	-50.9	-10.0	PASS
2486.236025	-53.2	-20.0	PASS
2487.236025	-54.7	-20.0	PASS
2487.472050	-54.7	-20.0	PASS

<b>4.5</b>	<b>Transmitter unwanted emissions in the spurious domain</b>	<b>VERDICT: PASS</b>
------------	--	----------------------

Standard	ETSI EN 300 328	
Limits:		
<b>Frequency range</b>	<b>Maximum power e.r.p. (<math>\leq 1</math> GHz) e.i.r.p. (<math>&gt; 1</math> GHz)</b>	<b>Bandwidth</b>
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

**Performed measurements**

Port under test	Enclosure port	
Test method applied	<input type="checkbox"/>	Conducted measurement
	<input checked="" type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 1 (1M) worst case	
Remark	---	

**Results**

Channel (MHz)	Polarity	Frequency (MHz)	Result (dBm)	Limit (dBm)	Verdict
2405	H	7212,00	-41,44	-30,00	PASS
	V	4810,00	-47,49	-30,00	PASS
		7212,00	-39,48	-30,00	PASS
2480	H	7433,00	-45,18	-30,00	PASS
	V	4949,00	-47,13	-30,00	PASS
		7433,00	-39,77	-30,00	PASS

## 5 RECEIVER TEST RESULTS

<b>5.1 Receiver spurious emissions</b>	<b>VERDICT: PASS</b>
--	----------------------

Standard	ETSI EN 300 328	
Limits:		
<b>Frequency range</b>	<b>Maximum power e.r.p. (<math>\leq 1</math> GHz) e.i.r.p. (<math>&gt; 1</math> GHz)</b>	<b>Measurement bandwidth</b>
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz

### Performed measurements

Port under test	Enclosure port	
Test method applied	<input type="checkbox"/>	Conducted measurement
	<input checked="" type="checkbox"/>	Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).	
Operating mode(s) used	Mode 2	
Remark	---	

### Results

Channel (MHz)	Polarity	Frequency (MHz)	Reading (dBm)	Attenuation (dB)	Result (dBm)	Limit (dBm)	Verdict
2405	H	No significant emissions were measured at the frequency range of interest employing the PK detectors (more than 20 dB below limits).					PASS
	V						PASS
2480	H	No significant emissions were measured at the frequency range of interest employing the PK detectors (more than 20 dB below limits).					PASS
	V						PASS

<b>5.2 Receiver Blocking</b>	<b>VERDICT: PASS</b>
------------------------------	----------------------

Standard	ETSI EN 300 328								
Limits:									
<b>Table 15: Receiver Blocking parameters receiver Category 2 equipment</b>									
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 45%;">Wanted signal mean power from companion device (dBm) (see notes 1 and 3)</th> <th style="width: 15%;">Blocking signal frequency (MHz)</th> <th style="width: 15%;">Blocking signal power (dBm) (see note 3)</th> <th style="width: 25%;">Type of blocking signal</th> </tr> </thead> <tbody> <tr> <td style="vertical-align: top;">(-139 dBm + 10 × log<sub>10</sub>(OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)</td> <td style="vertical-align: top;">2 380 2 504 2 300 2 584</td> <td style="vertical-align: top; text-align: center;">-34</td> <td style="vertical-align: top; text-align: center;">CW</td> </tr> </tbody> </table>	Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal	(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal						
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW						
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 26 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>									

**Performed measurements**

Port under test	Antenna port
Test method applied	<input checked="" type="checkbox"/> Conducted measurement
	<input type="checkbox"/> Radiated measurement
Test setup	Refer to the Annex 3 for test setup photo(s).
Operating mode(s) used	Mode 2
Remark	---

## Results


Test Channel	Freq [MHz]	Wanted Signal Level [dBm]	CW Level [dBm]	PER [%]	Limit [%]	Verdict
2404	2380.000000	-69	-34	0.23	<=10	PASS
2404	2300.000000	-69	-34	0.45	<=10	PASS
2480	2504.000000	-69	-34	0.32	<=10	PASS
2480	2584.000000	-69	-34	0.24	<=10	PASS

## 6 IDENTIFICATION OF THE EQUIPMENT UNDER TEST



The photographs show the tested device.




Model 9290024692A

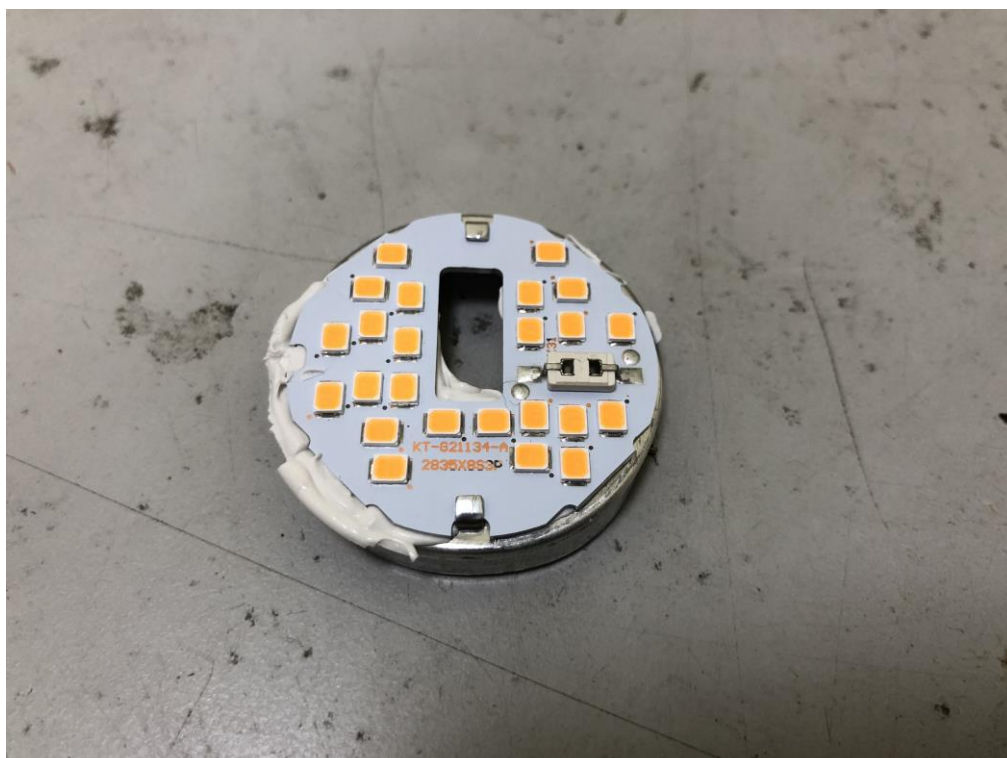

LED module

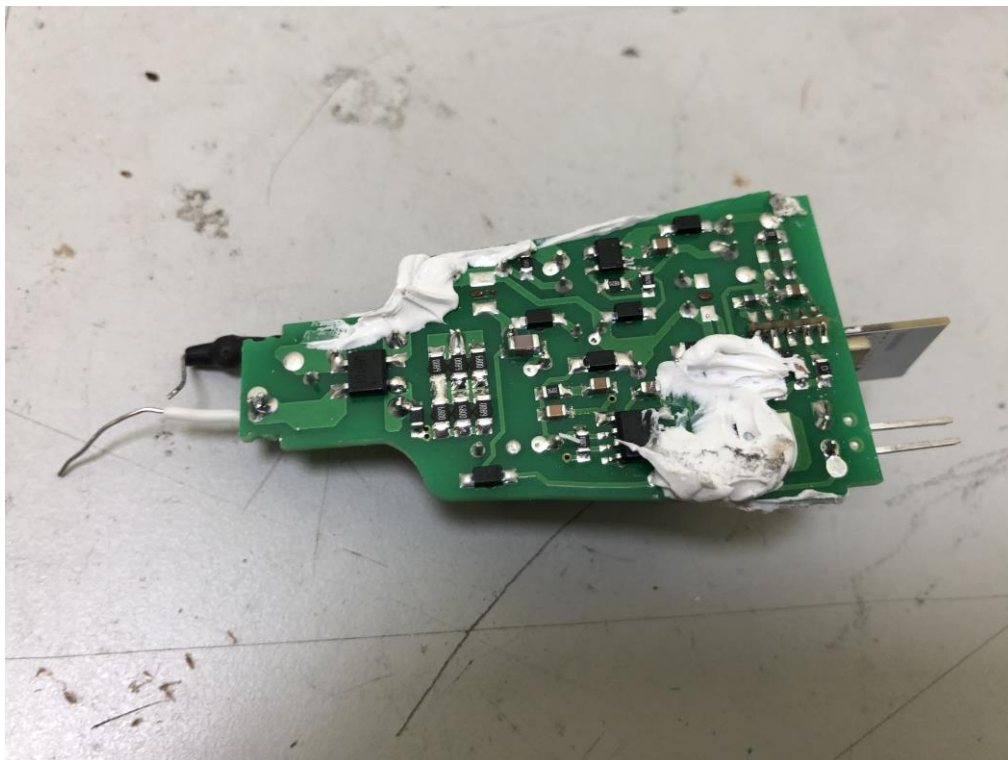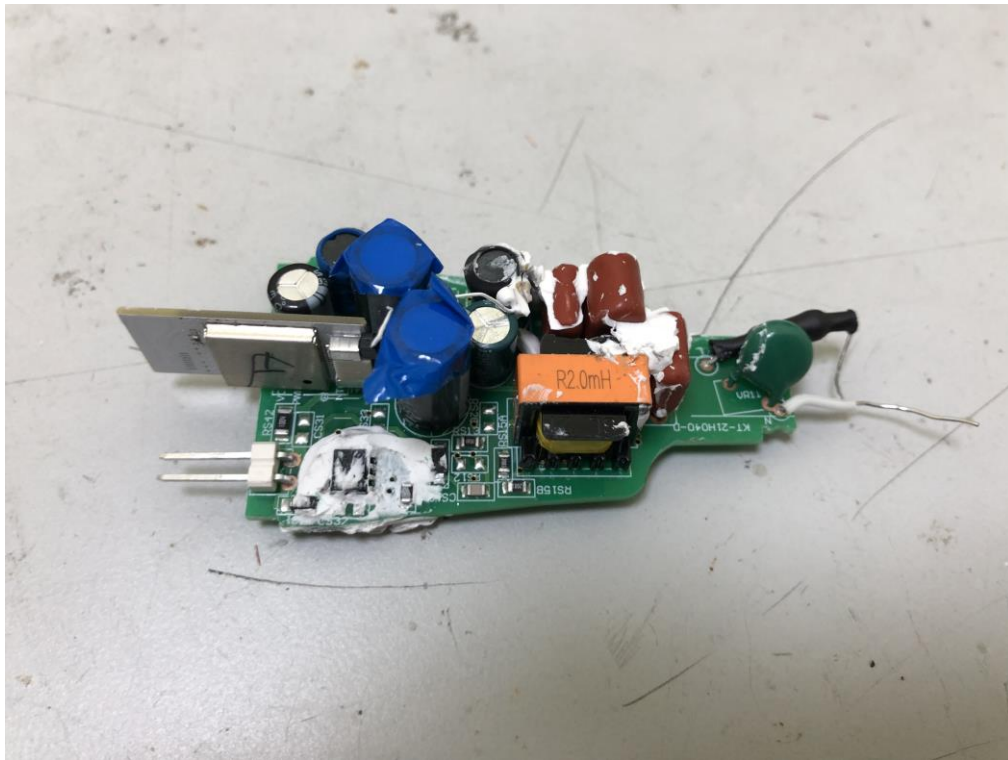

Power PCB

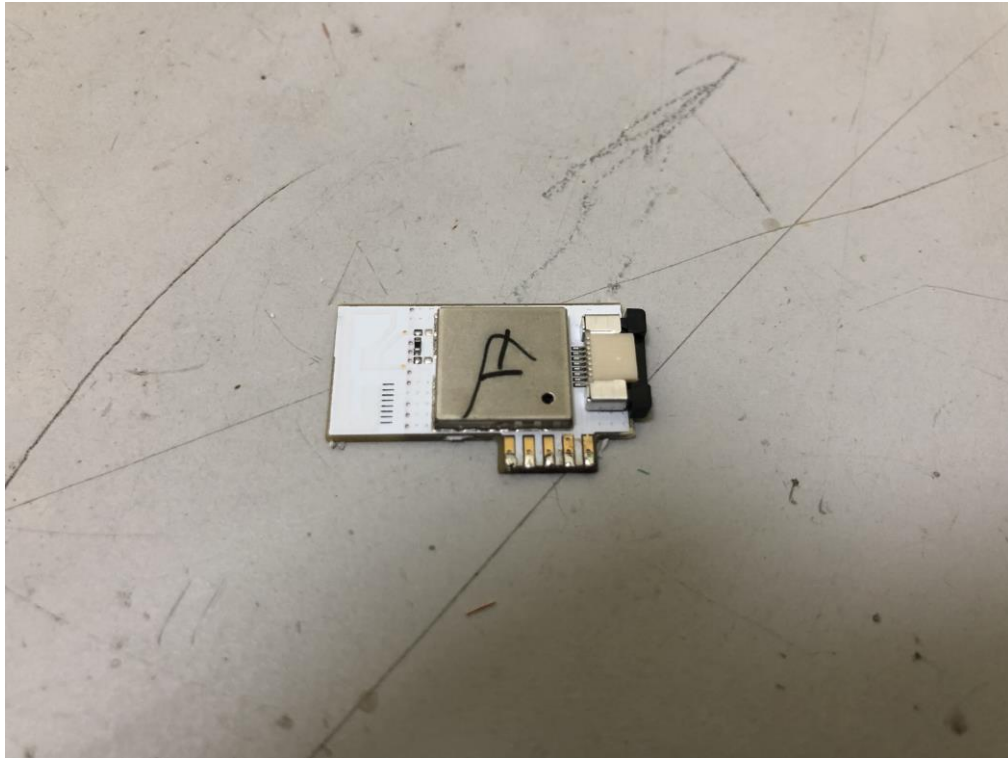

RF module

## ANNEX 1 – MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Occupied Channel Bandwidth	$\pm 0,7\%$
RF Output power, conducted	$\pm 0,6\text{dB}$
Power Spectral Density, Conducted	$\pm 0,6\text{dB}$
Unwanted Emissions, Conducted	$\pm 0.7\text{dB}$
Spurious (30-1000MHz)	$\pm 4,4\text{dB}$
Spurious (1-12,75GHz)	$\pm 4,4\text{dB}$

## ANNEX 2 - USED EQUIPMENT


Item	Instrumentation	Manufacturer	Model	Serial no.	DEKRA No.	Cal Due date
1	EMI receiver	R&S	ESCI	101205	G/L857	2022/07/21
2	Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	506	G/L864	2022/10/26
3	Antenna (1GHz-18GHz)	R&S	HF907	102306	G/L1236	2023/02/14
4	Horn antenna preamplifier	Schwarzbeek	SCU-18	102234	G/L1236-1	2023/02/14
5	Spectrum analyzer	R&S	FSV	SN101012	G/L1235	2023/01/17
6	Chamber	ETS	/	/	G/L856	2024/06/10
7	OSP	R&S	OSP 150	101907	GZ1894	2023/04/27
8	Signal generator	R&S	SMB 100A	181317	GZ1895	2023/04/27
9	Vector signal generator	R&S	SMBV100A	263671	GZ1896	2023/04/27
10	Wireless connectivity tester	R&S	CMW 270	100990	GZ1893	2022/04/27
11	Programmable Temperature & Humidity Chamber	ESPEC	EL-10KA	08107561	G/L466	2022/10/12

## ANNEX 3 - TEST PHOTOS

### Radiated measurements



### Conducted measurements

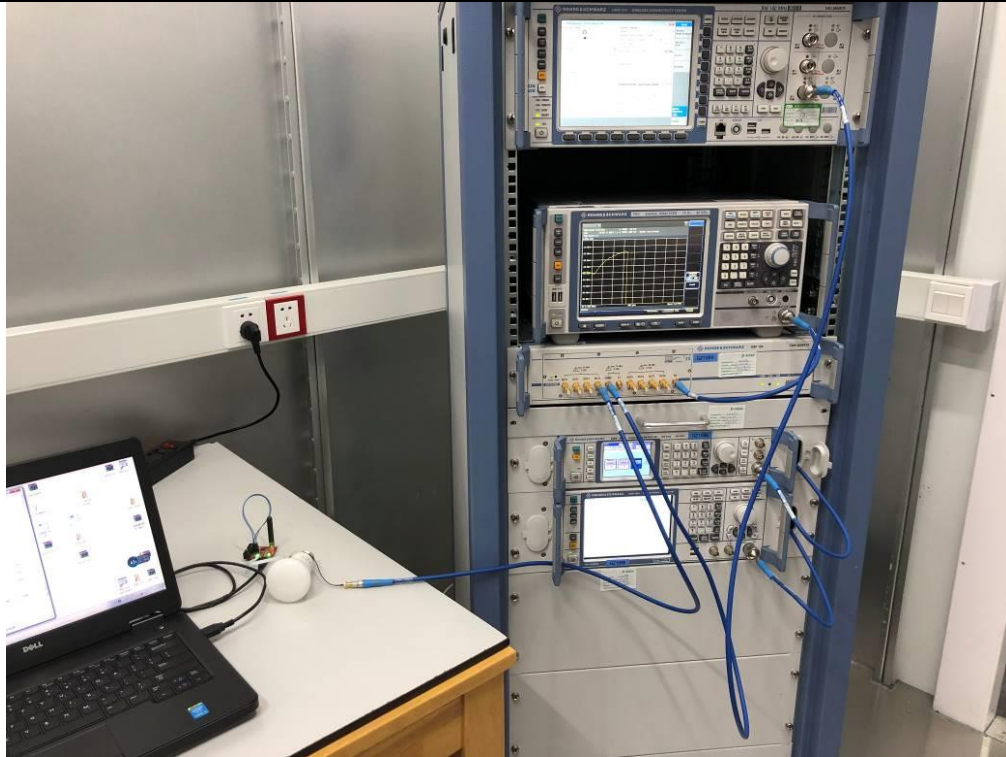

Normal temperature



Extreme temperature

--- END ---